



### Model Number

RVI70E

### Features

- Up to 5000 ppr
- Flameproof enclosure
- ATEX and IECEx approval
- Degree of protection IP66 / IP67
- High shaft load capacity
- Temperature range -40 ... 158 °F (-40°C to 70°C)
- Suitable for offshore applications

### Description

RVI70E Series incremental rotary encoders are enclosed in a pressure-resistant housing.

The robust bearing design allows high shaft loads to be absorbed, enabling this series of rotary encoder to deliver reliability and precision over its full service life. The compact design ensures efficient use of installation space.

The high degree of protection along with the seawater-resistant housing make the RVI70E ideal for use in tough environmental conditions. The temperature range of -40 °C to +70 °C allows the encoder to be used in a wide variety of climatic conditions. The wide range of variants available mean the RVI70E Series is suitable for use in a host of applications.

## Technical data

### General specifications

Detection type	photoelectric sampling
Device type	Incremental rotary encoder
Pulse count	max. 5000

### Functional safety related parameters

MTTF <sub>d</sub>	140 a
Mission Time (T <sub>M</sub> )	20 a
L <sub>10h</sub>	1.6 E+9 at 3000 rpm
Diagnostic Coverage (DC)	0 %

### Electrical specifications

Operating voltage U <sub>B</sub>	10 ... 30 V DC or 5 V DC ± 5 % (see "Output circuit" in the ordering information)
No-load supply current I <sub>0</sub>	max. 60 mA

### Output

Output type	push-pull, incremental or RS 422, incremental (see "Output circuit" in the ordering information)
Voltage drop U <sub>d</sub>	< 4 V (push-pull, incremental)
Load current	max. per channel 40 mA , short-circuit protected, reverse polarity protected (push-pull, incremental) max. per channel 20 mA , short-circuit protected, reverse polarity protected (RS 422, incremental)
Output frequency	max. 200 kHz
Rise time	250 ns
De-energized delay t <sub>off</sub>	250 ns

### Connection

Cable	Ø 10.2 mm, Radox 9 x 0.5 mm <sup>2</sup>
-------	--

### Standard conformity

Degree of protection	DIN EN 60529, IP66 DIN EN 60529, IP67
Climatic testing	DIN EN 60068-2-78 , no moisture condensation
Emitted interference	EN 61000-6-4:2007/A1:2011
Noise immunity	EN 61000-6-2:2005
Shock resistance	DIN EN 60068-2-27, 100 g, 3 ms
Vibration resistance	DIN EN 60068-2-6, 10 g, 10 ... 2000 Hz

### Ambient conditions

Operating temperature	
Gas Ex-area	-40 ... 70 °C (-40 ... 158 °F)
Dust Ex-area	-40 ... 70 °C (-40 ... 158 °F)
Storage temperature	
Gas Ex-area	-40 ... 70 °C (-40 ... 158 °F)
Dust Ex-area	-40 ... 70 °C (-40 ... 158 °F)

### Mechanical specifications

Material	
Combination 1	housing: anodized aluminum flange: anodized aluminum shaft: Stainless steel 1.4401 / AISI 316
Combination 2 (Inox)	housing: Stainless steel 1.4404 / AISI 316L flange: Stainless steel 1.4404 / AISI 316L shaft: Stainless steel 1.4401 / AISI 316
Mass	approx. 1300 g (combination 1) approx. 2300 g (combination 2)
Rotational speed	max. 6000 min <sup>-1</sup>
Moment of inertia	400 gcm <sup>2</sup>
Starting torque	< 5 Ncm
Shaft load	
Axial	110 N
Radial	150 N




### Data for application in connection with Ex-areas

EC-Type Examination Certificate	ZELM 14 ATEX 0519 X IECEx ZLM 14.0003X
Group, category, type of protection	⊕ II 2G Ex d IIC T6 - T4 Gb ⊕ II 2D Ex tb IIIC T80°C Db IP6X

### Directive conformity


Directive 94/9/EC	IEC 60079-0:2007 EN 60079-0:2009 IEC 60079-1:2007 EN 60079-1:2007 IEC 60079-31:2008 EN 60079-31:2009
-------------------	--

Dimensions

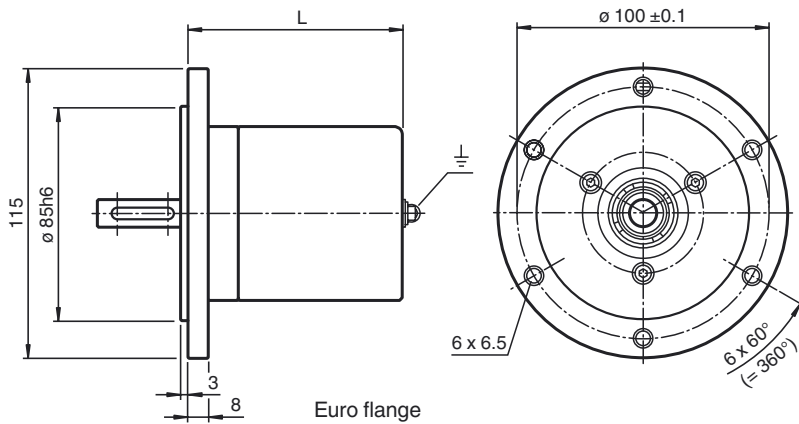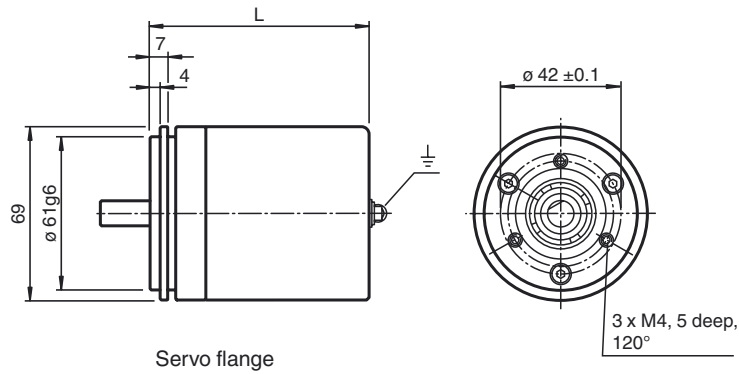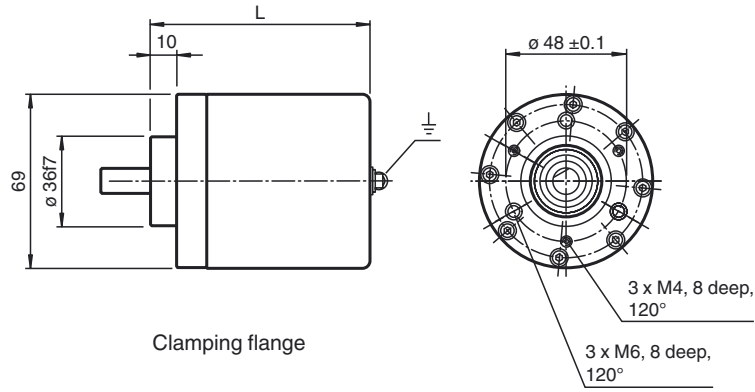


Flange	L [mm]	
	Axial output	Radial output
Clamping flange	80	87
Servo flange	80.2	87.2
Euro flange	78	85


Release date: 2014-12-11 09:15 Date of issue: 2014-12-11 1164178\_eng.xml

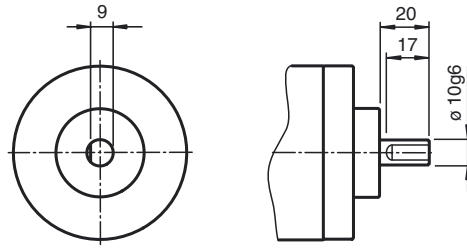

Shaft: 10 mm

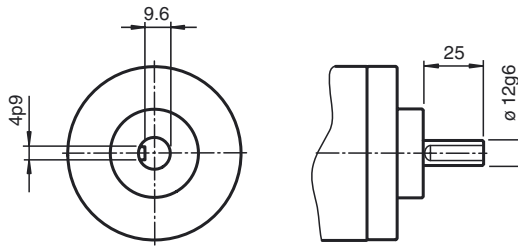


Shaft: 12 mm

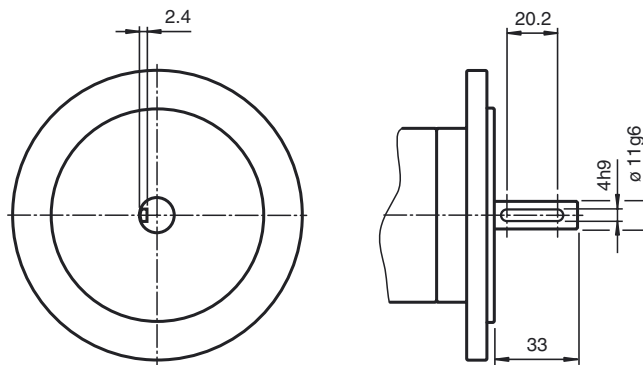


Shaft: 11 mm

Release date: 2014-12-11 09:15 Date of issue: 2014-12-11 t164178\_eng.xml

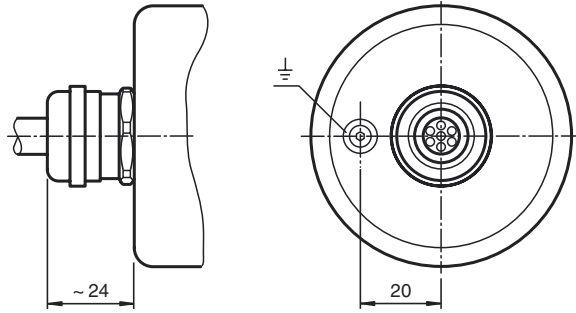

Axial output

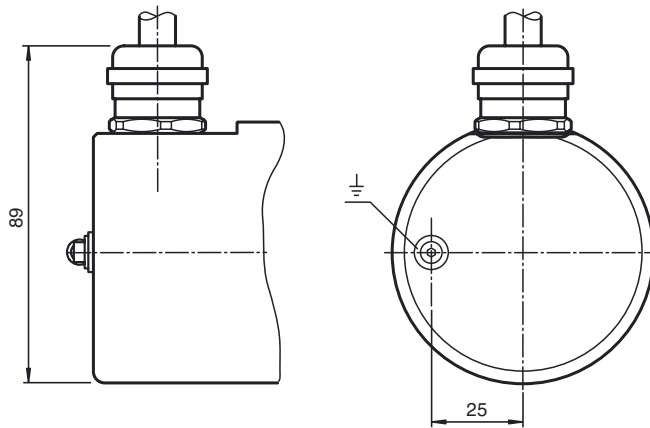


Radial output

**Electrical connection**

Signal	Cable Ø11.2 mm, 9-core
GND	1
+U <sub>b</sub>	2
A	3
B	4
$\bar{A}$	5
$\bar{B}$	6
Z	7
$\bar{Z}$	8
PE	Green/Yellow

Release date: 2014-12-11 09:15 Date of issue: 2014-12-11 t164178\_eng.xml

Signal outputs

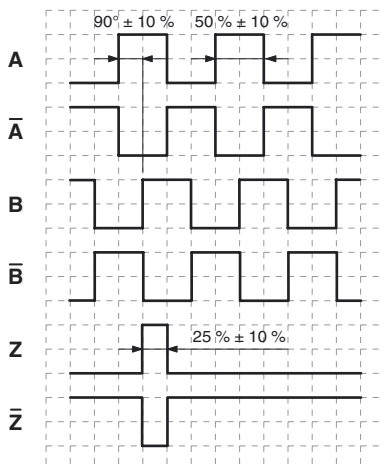

↻ cw - with view from the drive side

Order code

R	V	I	7	0	E	-						6							
---	---	---	---	---	---	---	--	--	--	--	--	---	--	--	--	--	--	--	--

**Pulse count** 512, 1000, 1024, 1800, 2000, 2048, 3600, 4096, 5000

**Housing material**  
**N** Aluminum  
**I** Inox

**Output switching**  
**1** 10 V ... 30 V, push-pull  
**6** 5 V, RS 422

**Signal output**  
**6** A + B + 0 and  $\bar{A}$  +  $\bar{B}$  +  $\bar{0}$

**Exit position**  
**A** Axial  
**R** Radial

**Connection type**  
**K1** Cable, 1 m  
**K2** Cable, 2 m  
**K5** Cable, 5 m  
**KA** Cable, 10 m

**Shaft dimension/flange version**  
**011** Shaft Ø10 mm x 20 mm with clamping flange  
**012** Shaft Ø10 mm x 20 mm with servo flange  
**021** Shaft Ø12 mm x 25 mm with clamping flange  
**022** Shaft Ø12 mm x 25 mm with servo flange  
**033** Shaft Ø11 mm x 30 mm with euro flange

**Special properties**  
**E** Explosion proof

**Shaft version**  
**V** Solid shaft

Release date: 2014-12-11 09:15 Date of issue: 2014-12-11 t164178\_eng.xml