

**Features**


- Suitable for fusing solenoids, alarm indicators, sounders etc, and diode decoupling of power supplies
- Simple OR gate for zone 1 mounting, visible separation for field devices, relay switches
- Bus termination
- Current limiting
- DIN rail mounting
- Maintenance without hot work permit
- Wires can be disconnected during operation once the module has been removed (parts under voltage remain covered)

**Function**





The multifunction terminal allows maintenance without a hot work permit in a hazardous area.

It employs a 2-step removal process, which guarantees that a potentially formed ignition spark remains inside the flameproof enclosure when lifting off a module and thus makes sure that the ignition spark has extinguished and the module is volt-free.

**Assembly**

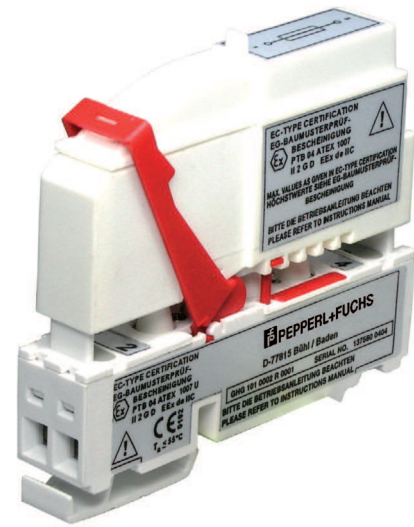

**Connection**

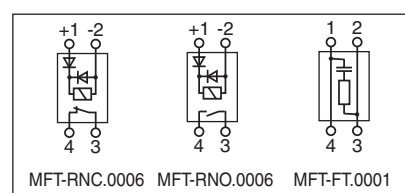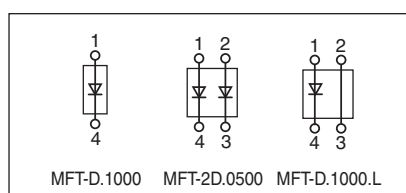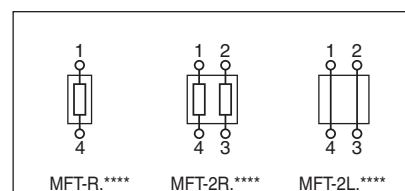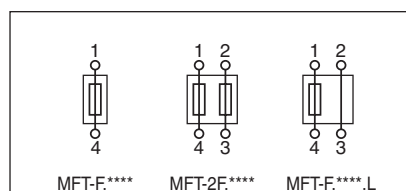

Release date 2015-02-19 16:16 Date of issue 2015-03-13 k40921\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>Electrical specifications</b>	
Resistor	1 x 1 Ω ... 22 MΩ, 0.5 W 2 x 1 Ω ... 22 MΩ, 0.5 W
Diode	1 x I ≤ 1 A 2 x I ≤ 0.5 A
Fuse	0.032 ... 1.5 A 1.5 ... 6.3 A
Nominal voltage	250 V ( ≤ 400 V AC/DC on request)
Relay	
Control	24 V , approx. 5 ... 8.5 mA
Contact loading	AC ≤ 250 V , ≤ 6 A DC ≤ 30 V , ≤ 1 A
Contact resistance	0.1 Ω at 6 V, 1 A
Switching operations NO contact	3 x 10 <sup>4</sup>
Switching operations NC contact	1 x 10 <sup>4</sup>
<b>Conformity</b>	
Degree of protection	IEC 60529
<b>Ambient conditions</b>	
Ambient temperature	-55 ... 55 °C (-67 ... 131 °F) (I <sub>m</sub> = 1.5 ... 6.3 A) -55 ... 70 °C (-67 ... 158 °F) (I <sub>m</sub> = 0.032 ... 1.5 A)
<b>Mechanical specifications</b>	
Core cross-section	0.5 ... 2.5 mm <sup>2</sup>
Degree of protection	IP20
Mass	approx. 115 g , depending on model
Dimensions	80 x 93 x 17.5 mm (3.15 x 3.66 x 0.69 in)
<b>Data for application in connection with Ex-areas</b>	
EC-Type Examination Certificate	PTB 07 ATEX 1004 U
Group, category, type of protection	⊕ II 2 G Ex d e IIC
Directive conformity	
Directive 94/9/EC	EN 60079-0:2009 EN 60079-1:2007 EN 60079-7:2007
<b>General information</b>	
Ordering information	Customer-specific resistance values available. Minimum order quantity 25 pieces.
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

### Ordering Information

Function	Order Code	Variants	Additional Requirements	Ambient Temperature	
				-55 ... 55 °C	-55 ... 70 °C
Multi Function Modules					
1 resistor		MFT-R.****	max. 0.5 W		X
2 identical resistors	MFT-2R.1000	MFT-2R.****		X	
customer-specific resistors			minimum order quantity 25 pieces		
1 diode	MFT-D.1000	MFT-D.****	diode 230 V, 1 A	X	
1 diode + 1 jumper	MFT-D.1000.L	MFT-D.****.L	diode 230 V, 1 A	X	
2 diodes	MFT-2D.0500	MFT-2D.****	diodes 230 V, 0.5 A	X	
1 fuse	MFT-F.0315	MFT-F.****	max. 4 A		X
			> 4 A	X	
1 fuse + 1 jumper	MFT-F.1000.L	MFT-F.****.L	max. 4 A		X
			> 4 A	X	
2 identical fuses	MFT-2F.0500	MFT-2F.****	max. 2 x 3.15 A	X	
2 jumpers	MFT-2L.1600	MFT-2L.****			X
bus terminator PA, FF	MFT-FT.0001				X
NO	MFT-RNO.0006		relay 230 V, 1 A		-40 ... 70 °C
NC	MFT-RNC.0006		relay 230 V, 1 A		-40 ... 70 °C
Sockets					
2-pin	MFT-BASE.2P				X
4-pin	MFT-BASE.4P				X

Note: sockets must be ordered separately.

Release date 2015-02-19 16:16 Date of issue 2015-03-13 t40921\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com