



Model Number

AVS58-H

Features

- Industrial standard housing Ø58 mm
- 16 Bit singleturn
- Hardware encoder
- Data transfer up to 2 MBaud
- Optically isolated RS 422 interface
- Servo or clamping flange

Description

This singleturn absolute encoder with modern fast technology transmits a position value corresponding to the shaft setting via the SSI interface (Synchronous Serial Interface). The resolution of the AVS58-H is maximum 65536 steps per revolution. In contrast to the AVS58 series the encoder does not have a microcontroller. Thus, it is a pure hardware encoder.

The control module sends a clock bundle to the absolute encoder to obtain the position data. The rotary encoder then sends the position data synchronous to the cycles of the control module. It is possible to select the counting direction with the function input.

This singleturn absolute encoder is available either in clamp flange design with a shaft diameter of 10 mm x 20 mm or in a servo flange design with a shaft diameter of 6 mm x 10 mm. The electrical connection is made by a 12-pin round plug connector. It is also possible to obtain a version with a 1 m cable connector.

Technical data

General specifications

Detection type photoelectric sampling

Functional safety related parameters

MTTF_d 170 a
 Mission Time (T_M) 20 a
 L_{10h} 1.9 E+11 at 6000 rpm and 20/40 N axial/radial shaft load
 Diagnostic Coverage (DC) 0 %

Electrical specifications

Operating voltage U_B 4.5 ... 30 V DC
 No-load supply current I₀ max. 180 mA
 Linearity ± 2 LSB at 16 Bit, ± 1 LSB at 13 Bit, ± 0,5 LSB at 12 Bit
 Output code Gray code, binary code
 Code course (counting direction) cw descending (clockwise rotation, code course descending)

Interface

Interface type SSI
 Monoflop time 20 ± 10 µs
 Resolution
 Single turn up to 16 Bit
 Overall resolution up to 16 Bit
 Transfer rate 0.1 ... 2 MBit/s
 Voltage drop U_B - 2.5 V
 Standard conformity RS 422

Input 1

Input type Selection of counting direction (cw/ccw)
 Signal voltage
 High 4.5 ... 30 V
 Low 0 ... 2 V
 Input current < 6 mA
 Switch-on delay < 10 ms

Connection

Connector type 9416, 12-pin, type 9416L, 12-pin
 Cable Ø7 mm, 6 x 2 x 0.14 mm², 1 m

Standard conformity

Protection degree DIN EN 60529, IP65
 Climatic testing DIN EN 60068-2-3, no moisture condensation
 Emitted interference DIN EN 61000-6-4
 Noise immunity DIN EN 61000-6-2
 Shock resistance DIN EN 60068-2-27, 100 g, 6 ms
 Vibration resistance DIN EN 60068-2-6, 20 g, 10 ... 2000 Hz

Ambient conditions

Operating temperature -40 ... 85 °C (-40 ... 185 °F)
 Storage temperature -40 ... 85 °C (-40 ... 185 °F)




Mechanical specifications

Material
 Combination 1 housing: powder coated aluminium
 flange: aluminium
 shaft: stainless steel
 Combination 2 (Inox) housing: stainless steel
 flange: stainless steel
 shaft: stainless steel
 Mass approx. 460 g (combination 1)
 approx. 800 g (combination 2)
 Rotational speed max. 12000 min⁻¹
 Moment of inertia 50 gcm²
 Starting torque < 5 Ncm
 Shaft load
 Axial 40 N
 Radial 110 N


Approvals and certificates

UL approval cULus Listed, General Purpose, Class 2 Power Source

Dimensions

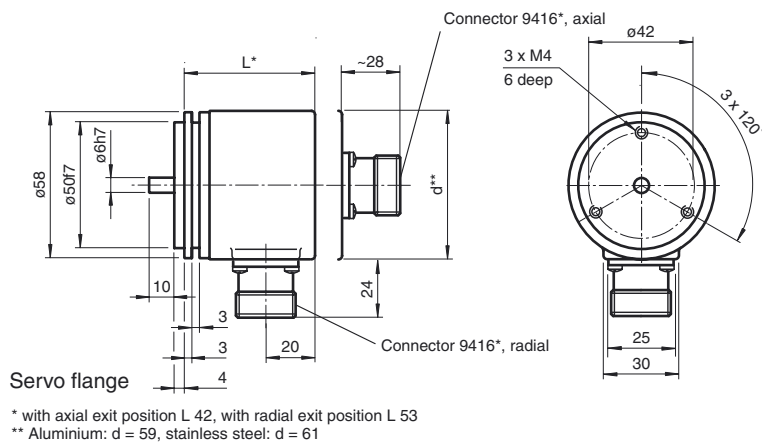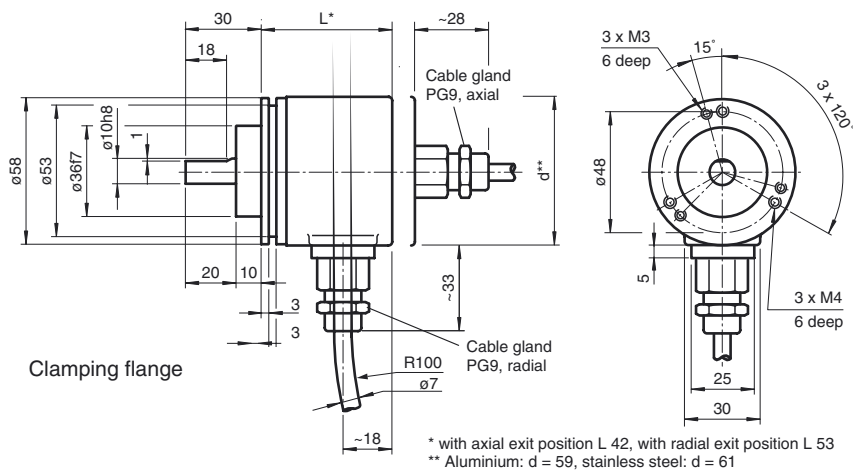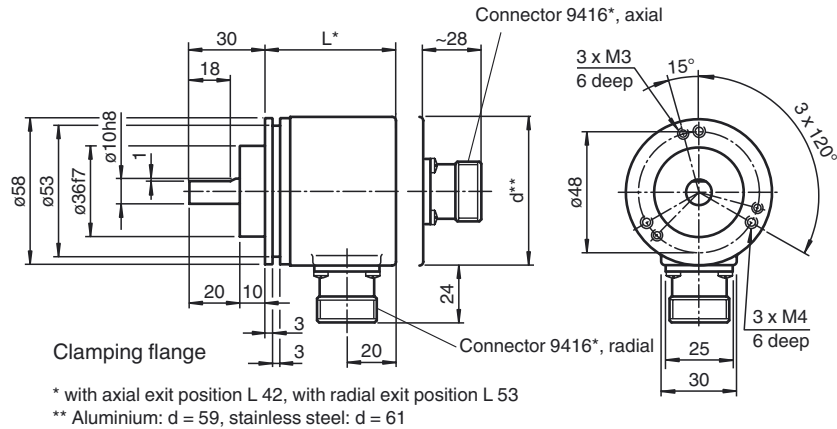

Release date: 2012-07-24 15:20 Date of issue: 2012-07-24 149176_eng.xml

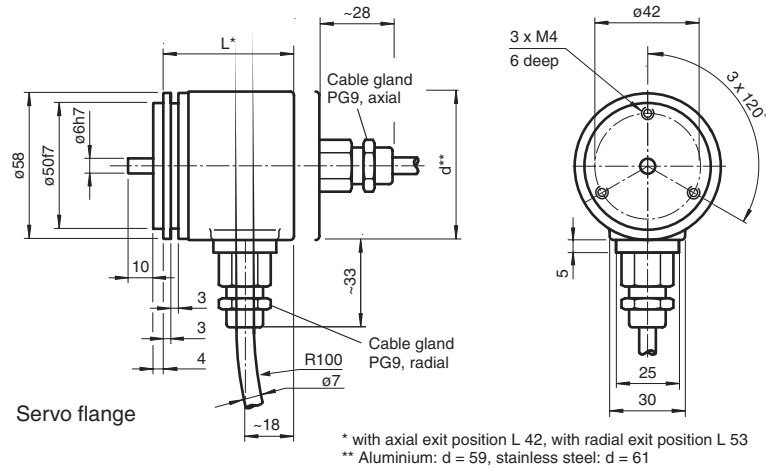

Accessories**9203**

Angled flange

9213

Mounting bracket, spring-loaded for clamping flange

9416

Cable connector

9310-3

Synchro clamping element

9300

Mounting bracket for servo flange

KW-10/10

Helical coupling

KW-6/10

Helical coupling

KW-6/6

Helical coupling

KW-6/8

Helical coupling

9401 10*10

Spring steel coupling

9401 10*12

Spring steel coupling

9401 6*10

Spring steel coupling

9401 6*6

Spring steel coupling

9402 6*6

Spring steel coupling

9404 10*10

Spring disk coupling

9404 6*6

Spring disk coupling

9409 10*10

Bellows coupling

9409 6*10

Bellows coupling

9409 6*6

Bellows coupling

9409 6*8

Bellows coupling

9410 10*10

Precision coupling

9410 10*12

Precision coupling

9410 6*6

Precision coupling



9460 6*6

Stainless steel bellows coupling

9460 10*10

Stainless steel bellows coupling

Electrical connection

| Signal | Cable Ø7 mm, 12-core | Connector 9416, 12-pin | Connector 9416L, 12-pin | Explanation |
|--------------------------|----------------------|---|--|---|
| GND (encoder) | White | 1 | 1 | Power supply |
| U _b (encoder) | Brown | 2 | 8 | Power supply |
| Clock (+) | Green | 3 | 3 | Positive cycle line |
| Clock (-) | Yellow | 4 | 11 | Negative cycle line |
| Data (+) | Grey | 5 | 2 | Positive transmission data |
| Data (-) | Pink | 6 | 10 | Negative transmission data |
| Reserved | Blue | 7 | 12 | Not wired, reserved |
| V/R | Red | 8 | 5 | Input for selection of counting direction |
| Reserved | Black | 9 | 9 | Not wired, reserved |
| Reserved | Violet | 10 | 4 | Not wired, reserved |
| Reserved | Grey/Pink | 11 | 6 | Not wired, reserved |
| Reserved | Red/Blue | 12 | 7 | Not wired, reserved |
| | |  |  | |


Release date: 2012-07-24 15:20 Date of issue: 2012-07-24 t49176_eng.xml

Description

The Synchronous Serial Interface was specially developed for transferring the output data of an absolute encoder to a control device. The control module sends a clock bundle and the absolute encoder responds with the position value.

Thus only 4 lines are required for the clock and data, no matter what the resolution of the rotary encoder is. The RS 422 interface is optically isolated from the power supply.

SSI signal course Standard

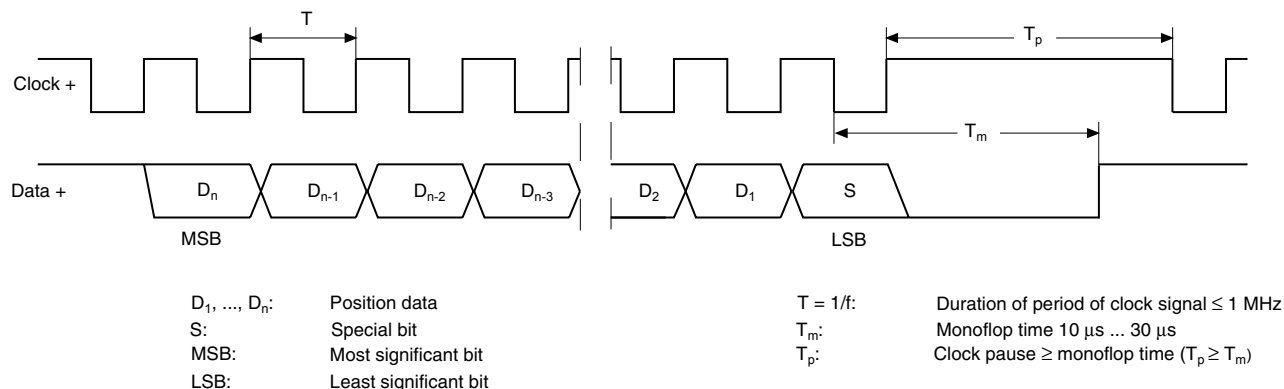

SSI output format Standard

- At idle status signal lines "Data +" and "Clock +" are at high level (5 V).
- The first time the clock signal switches from high to low, the data transfer in which the current information (position data (D_n) and special bit (S)) is stored in the encoder is introduced.
- The highest order bit (MSB) is applied to the serial data output of the encoder with the first rising pulse edge.
- The next successive lower order bit is transferred with each following rising pulse edge.
- After the lowest order bit (LSB) has been transferred the data line switches to low until the monoflop time T_m has expired.
- No subsequent data transfer can be started until the data line switches to high again or the time for the clock pause T_p has expired.
- After the clock sequence is complete, the monoflop time T_m is triggered with the last falling pulse edge.
- The monoflop time T_m determines the lowest transmission frequency.


SSI output format ring slide operation (multiple transmission)

- In ring slide operation, multiple transmission of the same data word over the SSI interface makes it possible to offer the possibility of detecting transmission errors.
- In multiple transmission, 25 bits are transferred per data word in standard format.
- If the clock change is not interrupted after the last falling pulse edge, ring slide operation automatically becomes active. This means that the information that was stored at the time of the first clock change is generated again.
- After the first transmission, the 26th pulse controls data repetition. If the 26th pulse follows after an amount of time greater than the monoflop time T_m , a new current data word will be transmitted with the following pulses.



If the pulse line is exchanged, the data word is generated offset.
Ring slide operation is possible up to max. 13 bits.

Block diagram

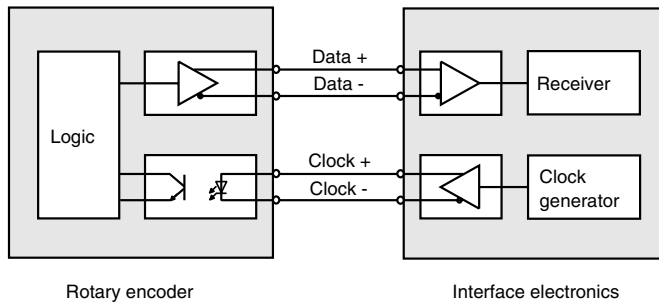


Line length

| Line length in m | Baudrate in kHz |
|------------------|-----------------|
| < 50 | < 400 |
| < 100 | < 300 |
| < 200 | < 200 |
| < 400 | < 100 |

Input

The selection of the counting direction input (V/R) is activated with 0-level.



Accessories

| For type | Accessories | Name/defining feature | Order code |
|------------|---|-----------------------------|-----------------|
| AVS58*-011 | Couplings | D1: Ø10 mm, D2: Ø10 mm | 9401 |
| | | D1: Ø10 mm, D2: Ø10 mm | 9404 |
| | | D1: Ø10 mm, D2: Ø10 mm | 9409 |
| | | D1: Ø10 mm, D2: Ø10 mm | KW |
| | Measurement wheels with circumference of 500 mm | Plastic | 9101, 10 |
| | | Pimpled rubber | 9102, 10 |
| | | Knurled aluminium | 9103, 10 |
| | | Knurled plastic | 9112, 10 |
| | Measurement wheels with circumference of 200 mm | Plastic | 9108, 10 |
| | | Pimpled rubber | 9109, 10 |
| | | Knurled aluminium | 9110, 10 |
| | | Knurled plastic | 9113, 10 |
| | Mounting aids | Mounting bracket | 9203 |
| | | Mounting bracket | 9213 |
| AVS58*-032 | Couplings | D1: Ø6 mm, D2: Ø6 mm | 9401 |
| | | D1: Ø6 mm, D2: Ø6 mm | 9402 |
| | | D1: Ø6 mm, D2: Ø6 mm | 9404 |
| | | D1: Ø6 mm, D2: Ø6 mm | 9409 |
| | | D1: Ø6 mm, D2: Ø6 mm | KW |
| | Mounting aids | Mounting bracket and set | 9300 and 9311-3 |
| | | Eccentric clamping elements | 9310-3 |
| All | Connectors | Cable socket | 9416 |
| | | Cable socket | 9416L |

For additional information on the accessories, please see the "Accessories" section.

Order code



- Number of bits singleturn**
 - 12 4096 (standard)
 - 13 8192
 - 16 65536
- Output code**
 - B Binary
 - G Gray
- Exit position**
 - A Axial
 - R Radial
- Connection type**
 - K1 Cable Ø7 mm, 6 x 2 x 0.14 mm², 1 m
 - AA Plug connector type 9416, 12-pin
 - AB Plug connector type 9416L, 12-pin
- Shaft dimension/flange version**
 - 011 Shaft Ø10 mm x 20 mm with clamping flange
 - 032 Shaft Ø6 mm x 10 mm with servo flange
- Housing material**
 - N Aluminium, powder coated
 - I Inox*
- Principle of operation**
 - S Singleturn
- Shaft version**
 - V Solid shaft
- Data format**
 - A SSI (Synchronous Serial Interface)

*Housing material I only available with axial exit position.

Release date: 2012-07-24 15:20 Date of issue: 2012-07-24 t49176_eng.xml