



EN Operating instructions.pages 1 to 6
Translation of the original operating instructions

Content

1 About this document

1.1 Function 1

1.2 Target group: authorised qualified personnel. 1

1.3 Explanation of the symbols used 1

1.4 Appropriate use 1

1.5 General safety instructions 1

1.6 Warning about misuse 2

1.7 Exclusion of liability 2

2 Product description

2.1 Ordering code 2

2.2 Special versions. 2

2.3 Destination and use 2

2.4 Actuating features 2

2.5 Technical data 2

2.6 Safety classification 3

3 Mounting

3.1 Dimensions 3

4 Electrical connection

4.1 Important notes 3

4.2 Wiring of the ZSD5. 4

4.3 Wiring of the ZSD6. 4

4.4 Strand lengths 4

5 Set-up and maintenance

5.1 Functional testing. 5

5.2 Maintenance 5

6 Disassembly and disposal

6.1 Disassembly. 5

6.2 Disposal 5

7 Appendix

7.1 Wiring example 5

8 Declaration of conformity

8.1 EC Declaration of conformity 6

1. About this document

1.1 Function

This operating instructions manual provides all the information you need for the mounting, set-up and commissioning to ensure the safe operation and disassembly of the safety switchgear. The operating instructions must be available in a legible condition and a complete version in the vicinity of the device.

1.2 Target group: authorised qualified personnel

All operations described in this operating instructions manual must be carried out by trained specialist personnel, authorised by the plant operator only.

Please make sure that you have read and understood these operating instructions and that you know all applicable legislations regarding occupational safety and accident prevention prior to installation and putting the component into operation.

The machine builder must carefully select the harmonised standards to be complied with as well as other technical specifications for the selection, mounting and integration of the components.

1.3 Explanation of the symbols used



Information, hint, note:

This symbol is used for identifying useful additional information.



Caution: Failure to comply with this warning notice could lead to failures or malfunctions.

Warning: Failure to comply with this warning notice could lead to physical injury and/or damage to the machine.

1.4 Appropriate use

The products described in these operating instructions are developed to execute safety-related functions as part of an entire plant or machine. It is the responsibility of the manufacturer of a machine or plant to ensure the correct functionality of the entire machinery or plant.

The safety switchgear must be exclusively used in accordance with the versions listed below or for the applications authorised by the manufacturer. Detailed information regarding the range of applications can be found in the chapter "Product description".

1.5 General safety instructions

The user must observe the safety instructions in this operating instructions manual, the country-specific installation standards as well as all prevailing safety regulations and accident prevention rules.



Further technical information can be found in the Schmersal catalogues or in the online catalogue on the Internet: www.schmersal.net.

The information contained in this operating instructions manual is provided without liability and is subject to technical modifications.

There are no residual risks, provided that the safety instructions as well as the instructions regarding mounting, commissioning, operation and maintenance are observed.

1.6 Warning about misuse



In case of improper use or manipulation of the safety switch-gear, personal hazards or damages to machinery or plant components cannot be excluded. The relevant requirements of the standard EN 14119 must be observed.

1.7 Exclusion of liability

We shall accept no liability for damages and malfunctions resulting from defective mounting or failure to comply with this operating instructions manual. The manufacturer shall accept no liability for damages resulting from the use of unauthorised spare parts or accessories.

For safety reasons, invasive work on the device as well as arbitrary repairs, conversions and modifications to the device are strictly forbidden; the manufacturer shall accept no liability for damages resulting from such invasive work, arbitrary repairs, conversions and/or modifications to the device.

2. Product description

2.1 Ordering code

This operating instructions manual applies to the following types:

ZSD^{①-②}

No.	Option	Description
①	5	2 NO contacts, 1 auxiliary contact (NC)
	6	2 NO contacts, 1 auxiliary contact (NC) with additional pushbutton (NO) in the device head
②		Without mounting angle
	H	With mounting angle, metal

Not all component variants, which are possible according to this order code, are available.



Only if the information described in this operating instructions manual are realised correctly, the safety function and therefore the compliance with the Machinery Directive is maintained.

2.2 Special versions

For special versions, which are not listed in the order code below 2.1, these specifications apply accordingly, provided that they correspond to the standard version.

2.3 Destination and use

The electromechanical enabling switches (handle switches) of the ZSD series are for instance used on industrial robots and automated production systems to activate the control functions for hazardous situations through other control devices.

An enabling device is an additional manually-operated control device, which is used in conjunction with the start equipment and enables a machine function, when it is continuously actuated.

The redundant contact configuration enables signal evaluation with common safety relay modules. The contact configuration enables the signal processing according to ISO 13849-1 PL e (level 2 ↔ 3) or PL c (level 2 ↔ 1).

2.4 Actuating features

Level	1	2	3	
NO contact 1-2				⊖
NO contact 3-4				⊖
Auxiliary contact 5-6				⊖

Suffix: White: open; black: closed; ⊖: positive break



The entire concept of the control system, in which the safety component is integrated, must be validated to the relevant standards.

2.5 Technical data

Standards: ISO 11161, ISO 10218, IEC 60947-5-1, IEC 60204-1, ISO 12100, EN 775, EN 60204-1, prEN ISO 11161, UL 508*, CSA C22.2 Nr. 14, JIS C8201-5-1, ANSI/RIA R 15.06

Ambient temperature: -10 °C ... +60 °C (without condensation)

Storage temperature: -40 °C ... +80 °C (without condensation)

Rel. air humidity: 45 ... 85% (no condensation)

Degree of pollution: 3

Contact resistance: max. 100 mΩ (initial value)

Insulation resistance: 100 mΩ (Megger 500 VDC)

Rated impulse withstand voltage: 2.5 kV

(without additional pushbutton)

Rated impulse withstand voltage: 1.5 kV

(with additional pushbutton)

Switching frequency: 1.200 s/h

Mechanical life:

- of the NO contact's switch insert: Level 1-2-1: min. 10⁶ operations

Level 1-2-3-1: min. 10⁵ operations

Electrical life:

- of the NO contact's switch insert: 10⁵ operations (at full load)

Positive break travel: 7.4 mm

Minimum required force for positive break: 90 N

Resistance to shocks: Operation: 100 m/s²

Destructive: 1,000 m/s²

Resistance to vibrations:

Operation: 5 ... 55 Hz,

amplitude 0.5 mm min.;

destructive: 16.7 Hz,

amplitude 1.5 mm min.

Connection:

Screw terminals

Cable section: 0.14 ... 1.5 mm²

Cable diameter: 7 ... 13 mm

Cable gland: M 20

Tensile strength of the connection: 20 N min.

Recommended tightening torque for the screws: Enclosure screws:

1.2 ± 0.1 Nm

Strain relief: 4.0 ± 0.3 Nm

Screw terminals: 0.5 ... 0.6 Nm

Rubber cap screws: -*

Board screws: -*

* Do NOT remove!

Protection class: IP65

Max. fuse rating: 50 A (250 V)

Protection of the contacts: external (I_k = 1000 A) to EN 60947-5-1,

Safety fuse 10 A quick blow

Recommended fuse: 250 V / 10 A quick-blow (IEC 60127-1)

Weight: ZSD5: approx. 210 g;

ZSD6: approx. 240 g

Electrical specification of the ZSD5/ZSD6 base device

(without pushbutton)

Rated operating voltage U_e: 250 VAC / VDC

Rated operating current I_e: 3.0 A

NO contacts:

Ohmic load (AC-12):	30 V: –; 125 V: 3.0 A; 250 V: 1.5 A
Inductive load (AC-15):	30 V: –; 125 V: 1.5 A; 250 V: 0.75 A
Ohmic load (DC-12):	30 V: 2.0 A; 125 V: 0.4 A; 250 V: 0.2 A
Inductive load (DC-13):	30 V: 1.0 A; 125 V: 0.22 A; 250 V: 0.1 A
Contact configuration:	2 NO contacts

Auxiliary contact:

Ohmic load (AC-12):	30 V: –; 125 V: 2.0 A; 250 V: 1.0 A
Inductive load (AC-15):	30 V: –; 125 V: 1.0 A; 250 V: 0.75 A
Ohmic load (DC-12):	30 V: 2.0 A; 125 V: 0.4 A; 250 V: 0.2 A
Inductive load (DC-13):	30 V: 2.3 A; 125 V: 0.22 A; 250 V: 0.1 A
Contact configuration:	1 NC contact

Additional pushbutton for ZSD6:

Ohmic load (AC-12):	30 V: –; 125 V: 0.5 A; 250 V: –
Inductive load (AC-15):	30 V: –; 125 V: 0.3 A; 250 V: –
Ohmic load (DC-12):	30 V: 1.0 A; 125 V: 0.2 A; 250 V: –
Inductive load (DC-13):	30 V: 0.7 A; 125 V: 0.1 A; 250 V: –

*UL508:

- If the device is to be used in a damp room, a suitable connection cable must be used.
- This device has been tested for impact and fire resistance according to UL508.

2.6 Safety classification

Standards:	ISO 13849-1, IEC 61508
SIL:	Level 2 ↔ 1: STOP 0: up to 2 Level 2 ↔ 3: STOP 1: up to 3
PL:	Level 2 ↔ 1: up to c Level 2 ↔ 3: up to e
Category:	Level 2 ↔ 1: STOP 1: up to 2 Level 2 ↔ 3: STOP 0: up to 4
CCF:	> 65 points
Service life:	20 years
B _{10d} value (for one channel):	100.000

$$MTTF_d = \frac{B_{10d}}{0,1 \times n_{op}} \quad n_{op} = \frac{d_{op} \times h_{op} \times 3600 \text{ s/h}}{t_{cycle}}$$

For an average annual demand rate of $n_{op} = 126,720$ cycles per year, Performance Level PL e can be obtained at maximum load.

- n_{op} = average number of activations per year
- d_{op} = average number of operating days per year
- h_{op} = average number of operating hours per day
- t_{cycle} = average demand rate of the safety function in s
(e.g. 4 × per hour = 1 × per 15 min. = 900 s)


(Specifications can vary depending on the application-specific parameters h_{op} , d_{op} and t_{cycle} as well as the load.)

Actuating features

The redundant contact configuration enables signal evaluation with common safety relay modules. The contact configuration enables the signal processing according to ISO 13849-1 PL e (level 2 ↔ 3) or PL c (level 2 ↔ 1).


3. Mounting

The monitoring device must be equipped with a cross-wire short monitoring. In addition to that, the enabling channels must be wired as shown below. A 4-strand double shielded cable must be used.



3.1 Dimensions

Dimensions of the ZSD enabling switch

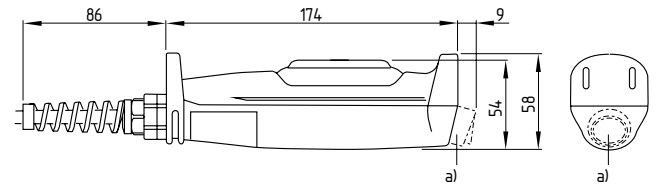

a) only for ZSD6

4. Electrical connection

4.1 Important notes




The electrical connection may only be carried out by authorised personnel in a de-energised condition.



If the device is to be used in a damp room, a suitable connection cable must be used.

After wiring, the contact elements must be cleaned (i.e. remove excess cables etc.).

4.2 Wiring of the ZSD5

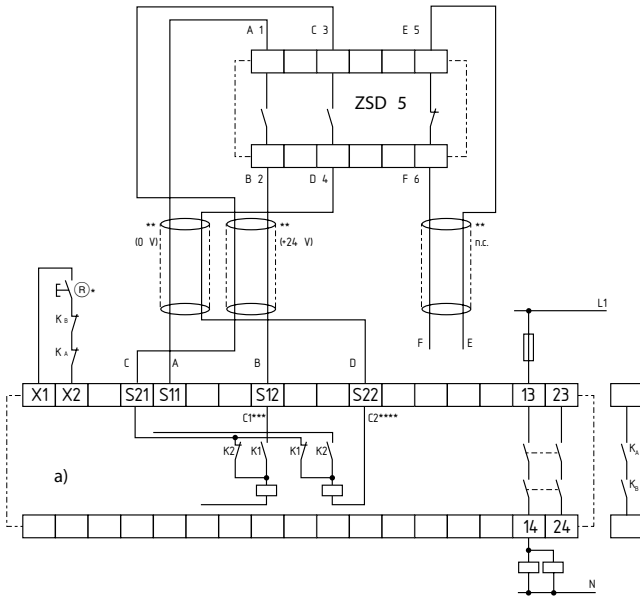


- a) SRB 301ST / preferred SRB 301MC / SRB 301LC
 * External reset button in series with the feedback circuit. If the feedback circuit is not required, establish a bridge. If the reset button is bridged, an automatic start takes place.
 ** Screen
 *** C1 = channel 1 with cross-wire detection:
 **** C2 = channel 2 with cross-wire detection:

Colour	internal	external
A) pink	1	NO contact 1-2 (24 V)
B) yellow	2	
C) green	3	NO contact 3-4 (0 V)
D) grey	4	
E) brown	5	Auxiliary contact 5-6 (n.c.)
F) white	6	
Shielded	grey-pink	0 V
Shielded	yellow-green	24 V
Shielded	brown-white	n.c.

Increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

4.3 Wiring of the ZSD6

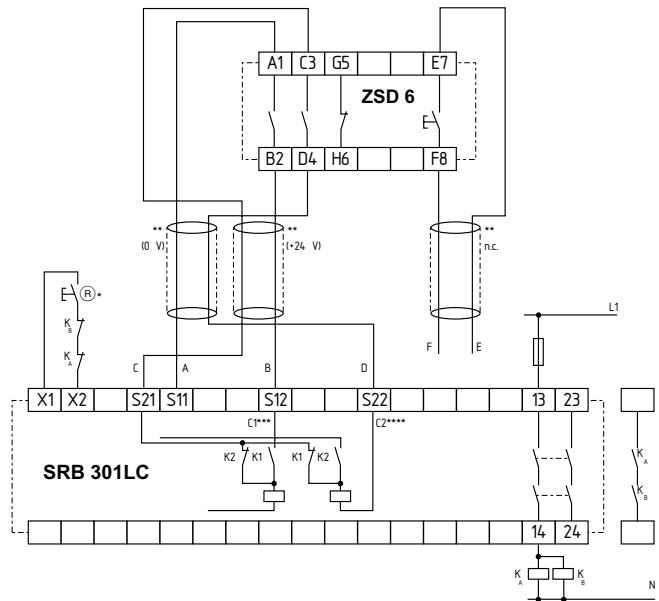


- * External reset button in series with the feedback circuit. If the feedback circuit is not required, establish a bridge. If the reset button is bridged, an automatic start takes place.
 ** shielded
 *** C1 = channel 1 with cross-wire detection:
 **** C2 = channel 2 with cross-wire detection:

Colour	internal	external
A) pink	1	NO contact 1-2
B) yellow	2	
C) green	3	NO contact 3-4
D) grey	4	
E) brown	7	Pushbutton 7-8
F) white	8	
G)	5	Auxiliary contact 5-6
H)	6	
Shielded	grey-pink	0 V
Shielded	yellow-green	24 V
Shielded	brown-white	n.c.

Increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

4.4 Strand lengths

Connection 1 ... 4: L1 = 40 mm; L3 = 6 mm
 Connection 5 ... 8: L2 = 27 mm

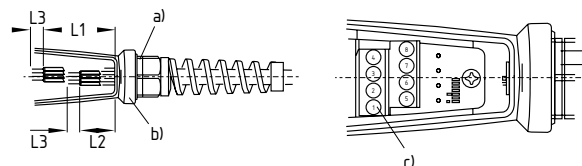
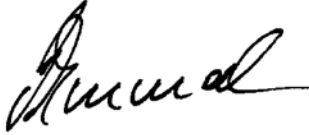


- a) M20 nut;
 b) Handle switch;
 c) Connection number

Note: Strand section 0.14 ... 1.5 mm² (1 strand per connection)

8. Declaration of conformity

8.1 EC Declaration of conformity

	
EC Declaration of conformity	
Translation of the original Declaration of Conformity	K.A. Schmersal GmbH & Co. KG Möddinghofe 30 42279 Wuppertal Germany Internet: www.schmersal.com
We hereby certify that the hereafter described safety components both in its basic design and construction conform to the applicable European Directives.	
Name of the safety component:	ZSD5 ZSD6
Description of the safety component:	Enabling switches
Relevant EC-Directives:	2006/42/EC-EC-Machinery Directive
Person authorized for the compilation of the technical documentation:	Oliver Wacker Möddinghofe 30 42279 Wuppertal
Place and date of issue:	Wuppertal, February 21, 2014
	
	Authorised signature Philip Schmersal Managing Director



The currently valid declaration of conformity can be downloaded from the internet at www.schmersal.net.



K. A. Schmersal GmbH & Co. KG
Möddinghofe 30, D - 42279 Wuppertal
Postfach 24 02 63, D - 42232 Wuppertal

Phone: +49 - (0)2 02 - 64 74 - 0
Telefax: +49 - (0)2 02 - 64 74 - 1 00
E-Mail: info@schmersal.com
Internet: <http://www.schmersal.com>