



Main

| | |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Jumper cable |


Complementary

| | |
|--------------------------------|---|
| Jumper cable end 1 | M8 male, :4 pins (straight), fixing: screw-on |
| Jumper cable end 2 | M8 female, :3 pins (straight), fixing: screw-on |
| Collar material | Metal |
| Cable composition | 3 x 0.25 mm ² |
| Cable length | 2 m |
| Wire insulation material | PVC |
| Cable outer diameter | 4.6 mm |
| [Ue] rated operational voltage | 300 V DC 250 V AC |
| [In] rated current | 3 A |
| Insulation resistance | >= 1000 MOhm |
| Resistance across terminals | <= 5000 mOhm |
| Product weight | 0.09 kg |

Environment

| | |
|---------------------------------------|----------------------|
| IP degree of protection | IP65 IP67 |
| Ambient air temperature for operation | -25...80 °C (static) |
| Ambient air temperature for storage | -25...80 °C |

Dimensions

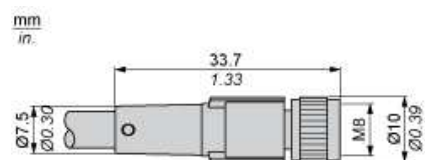

Connections and Schemes

