


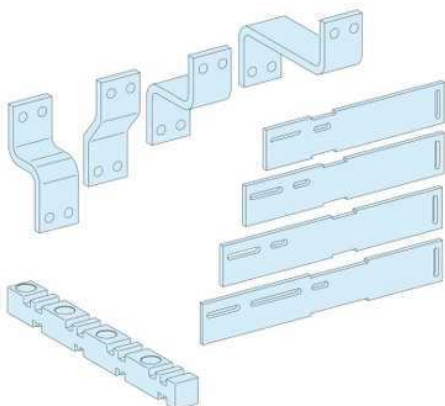

Main

Range of product	Prisma P
Range	Prisma
Range compatibility	Prisma P
Product or component type	Connection
Accessory / separate part category	Current distribution accessory

Complementary

Cubicle-device connection	Linerger busbar
Poles description	4P
Enclosure/cubicle description	Cubicle - width 650 mm
Installed device	Compact : fixed INV630b...1600 - control: direct front rotary handle vertical installation Compact : fixed INS630b...1600 - control: direct front rotary handle vertical installation
[Ie] rated operational current	1600 A
[In] rated current	1600 A
Quantity per set	Set of 1
Product weight	18.56 kg
Enclosure/cubicle width	650 mm 400 mm Prisma P Cubicle Compact INV630b...1600 Fixed Direct front rotary handle Vertical 4P 1 Front connection on adaptor 14 650 mm 400 mm Prisma P cubicle Compact INS630b...1600 fixed direct front rotary handle vertical 4P 1 front connection on adaptor 14

Environment

Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASEFA

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0936 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	The warranty on the equipment is 18 months from the date of entry into service, as evidenced by a relevant document, but not more than 24 months from the date of delivery
-----------------	--