


XCKZ015

limit switch contact block XCKZ - 1 C/O snap
action - silver plated

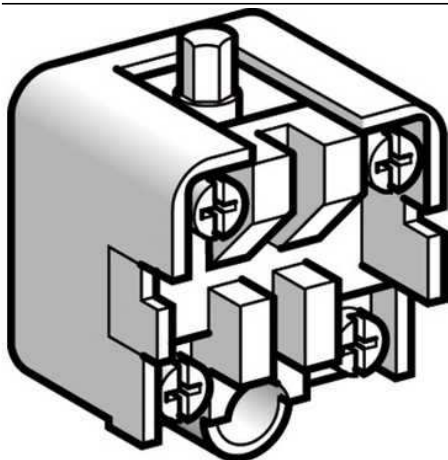

Main

| | |
|-------------------------------|----------------------------|
| Range of product | OsiSense XC |
| Series name | Standard format |
| Product or component type | Limit switch contact block |
| Device short name | XCKZ |
| Associated body | ZC2JC15 |
| Number of poles | 1 |
| Contacts operation | Snap action |
| Contacts type and composition | 1 C/O |

Complementary

| | |
|-------------------------------|---|
| Product compatibility | XC2J |
| Electrical connection | Screw-clamp terminals, clamping capacity: 1 x 0.5...2 x 2.5 mm ² |
| Contacts insulation form | Za |
| Contacts material | Silver plated contacts |
| Positive opening | Without |
| Minimum actuation speed | 0.01 mm/s |
| Contact code designation | Q300, DC-13 (U _e = 250 V, I _e = 0.27 A) conforming to EN/IEC 60947-5-1 appendix A A300, AC-15 (U _e = 240 V, I _e = 3 A) conforming to EN/IEC 60947-5-1 appendix A |
| Resistance across terminals | < 25 mOhm conforming to IEC 60255-7 category 3 |
| [Ui] rated insulation voltage | 300 V conforming to CSA C22.2 No 14 500 V conforming to IEC 60947-5-1 |
| Short circuit protection | 10 A by gG cartridge fuse |
| Electrical durability | 5000000 cycles, DC-13 48 V, 7 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 24 V, 10 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 120 V, 4 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C |

Offer Sustainability

| | |
|--------------------------|-----------------------------|
| Sustainable offer status | Not Green Premium product |
| RoHS (date code: YYWW) | Will be Compliant on 3Q2013 |