



## Switching automation light grids WLG

WLG12-P537



**Model Name** > [WLG12-P537](#)  
**Part No.** > [1015798](#)



*Illustration may differ*

#### At a glance

- The direct output of individual beams for measuring and switching
- Response time 0.6 ms
- Eight visible transmission LEDs
- Eight PNP switching outputs and one alarm output
- Sensitivity can be set via a potentiometer
- Polarizing filter for reflective surfaces

#### Your benefits

- The WLG's fast response time keeps up with increased conveyor speeds, increasing throughput
- Detects translucent and semi-transparent objects for consistent detection of most objects
- Retro-reflective sensor saves space, installation time and cost
- Polarized retro-reflective light grids are designed to detect difficult reflective targets, such as stretch wrap and other thin films
- Visible red light reduces assembly time
- Multiple output versions indicate detection position and size of the object for closed loop process feedback and inspection



#### Features

Technology:	Retro-reflective light grid
Task:	Switching light grid
Minimum detectable object (MDO):	Parallel beam, 6 mm ... 12.5 mm
Beam separation:	12.5 mm
Number of beams:	8
Detection height:	87.5 mm
Resolution (adjustable) <sup>1)</sup> :	6 mm ... 12.5 mm

<sup>1)</sup> Dependence of the range

#### Performance

Maximum range:	1.5 m
Minimum range:	≥100 mm
Working range:	1.5 m
Response time <sup>1)</sup> :	Parallel beam: ≥0.6 ms

<sup>1)</sup> With resistive load

## Interfaces

---

Output type: 2 x PNP (Q and /Q)  
Connection type: Connector M12, 5-pin

## Mechanics/electronics

---

Wave length: 650 nm  
Supply voltage  $V_s$  <sup>1)</sup>: DC 18 V ... 30 V  
Power consumption sender: 80 mA  
Ripple: < 5 Vpp  
Output current  $I_{max.}$ : 100 mA  
Output load capacitive: 100 nF  
Output load inductive: 1 H  
Initialization time: 0.6 s  
Dimensions (W x H x D): 62 mm x 106 mm x 46.6 mm  
Housing material: Plastic  
Indication: LED  
Enclosure rating: IP 67  
Circuit protection: Output Q short-circuit protected  
Interference suppression  
VS connections reverse-polarity protected  
  
Weight: 230 g  
Front screen: PMMA  
Output mode <sup>2)</sup>: Q dark switching  
Teach input: PNP


<sup>1)</sup> Typical value <sup>2)</sup> Q = active in case one beam is interrupted, /Q = active in case all beam are free

## Ambient data

---

Protection class: II  
EMC: EN 60947-5-2  
Ambient temperature: Operation: -25 ... +55 °C  
Storage: -20 ... +70 °C  
Vibration resistance: 5 g, 10 Hz ... 55 Hz (IEC 68-2-6)  
Shock load: 10 g/DIN EN 60068-2-29/16 ms

## Dimensional drawing

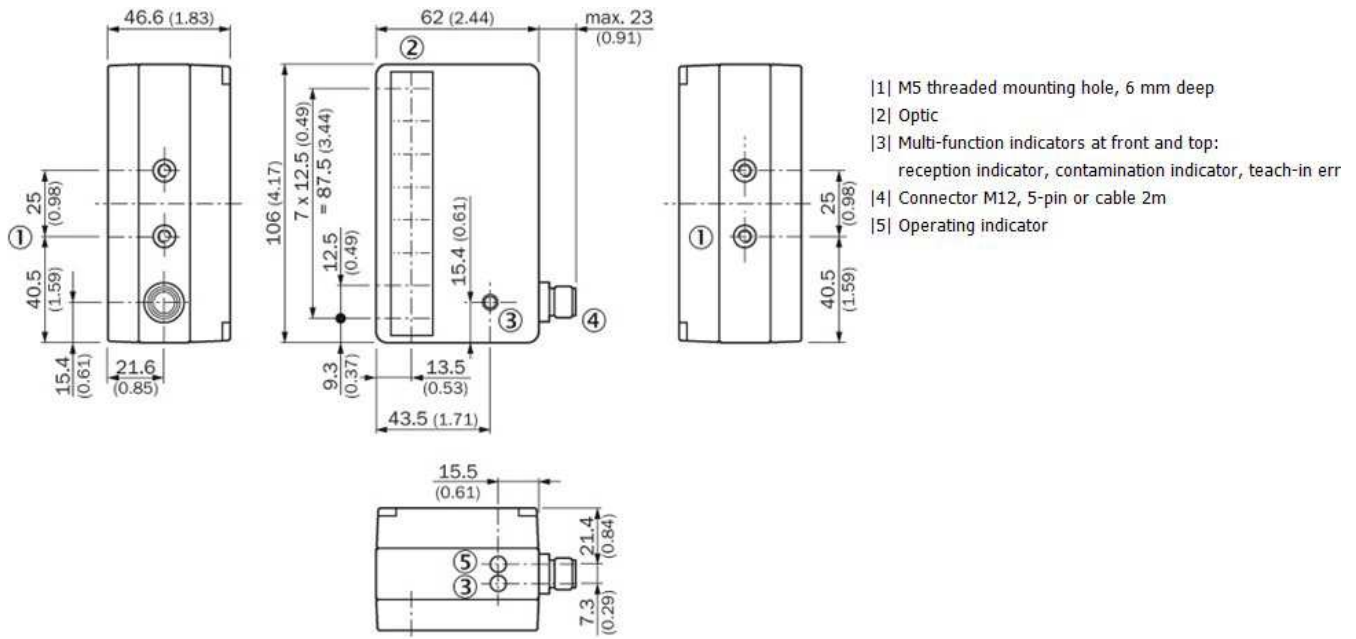

## Adjustments





Choice of sensitivity range, dimensions in mm/m (inch)

Potentiometer setting	Resolution	Working range	Reflector
1	> 12.5 mm (0.49)	1.5 m (59.06)	2 x PL80A/PL40A
2	> 10 mm (0.39)	1.2 m (47.24)	2 x PL80A/PL40A
3	> 9 mm (0.35)	1.0 m (39.37)	PL180E01
4	> 7 mm (0.28)	0.8 m (31.50)	PL180E01
5	> 6 mm (0.24)	0.4 m (15.75)	PL180E01

[1] Potentiometer for sensitivity adjustment

Connection type and diagram

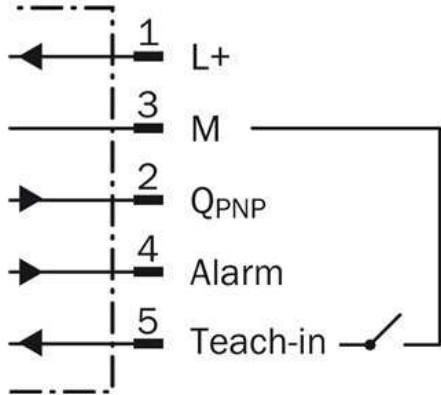

**Australia**

Phone +61 3 9457 0600  
1800 33 48 02 – tollfree  
E-Mail sales@sick.com.au

**Belgium/Luxembourg**

Phone +32 (0)2 466 55 66  
E-Mail info@sick.be

**Brasil**

Phone +55 11 3215-4900  
E-Mail marketing@sick.com.br

**Canada**

Phone +1 905 771 14 44  
E-Mail information@sick.com

**Česká republika**

Phone +420 2 57 91 18 50  
E-Mail sick@sick.cz

**China**

Phone +86 4000 121 000  
E-Mail info.china@sick.net.cn  
Phone +852-2153 6300  
E-Mail ghk@sick.com.hk

**Danmark**

Phone +45 45 82 64 00  
E-Mail sick@sick.dk

**Deutschland**

Phone +49 211 5301-301  
E-Mail info@sick.de

**España**

Phone +34 93 480 31 00  
E-Mail info@sick.es

**France**

Phone +33 1 64 62 35 00  
E-Mail info@sick.fr

**Great Britain**

Phone +44 (0)1727 831121  
E-Mail info@sick.co.uk

**India**

Phone +91-22-4033 8333  
E-Mail info@sick-india.com

**Israel**

Phone +972-4-6881000  
E-Mail info@sick-sensors.com

**Italia**

Phone +39 02 27 43 41  
E-Mail info@sick.it

**Japan**

Phone +81 (0)3 5309 2112  
E-Mail support@sick.jp

**Magyarország**

Phone +36 1 371 2680  
E-Mail office@sick.hu

**Nederland**

Phone +31 (0)30 229 25 44  
E-Mail info@sick.nl

**Norge**

Phone +47 67 81 50 00  
E-Mail sick@sick.no

**Österreich**

Phone +43 (0)22 36 62 28 8-0  
E-Mail office@sick.at

**Polska**

Phone +48 22 837 40 50  
E-Mail info@sick.pl

**România**

Phone +40 356 171 120  
E-Mail office@sick.ro

**Russia**

Phone +7-495-775-05-30  
E-Mail info@sick.ru

**Schweiz**

Phone +41 41 619 29 39  
E-Mail contact@sick.ch

**Singapore**

Phone +65 6744 3732  
E-Mail sales.gsg@sick.com

**Slovenija**

Phone +386 (0)1-47 69 990  
E-Mail office@sick.si

**South Africa**

Phone +27 11 472 3733  
E-Mail info@sickautomation.co.za

**South Korea**

Phone +82 2 786 6321/4  
E-Mail info@sickkorea.net

**Suomi**

Phone +358-9-25 15 800  
E-Mail sick@sick.fi

**Sverige**

Phone +46 10 110 10 00  
E-Mail info@sick.se

**Taiwan**

Phone +886 2 2375-6288  
E-Mail sales@sick.com.tw

**Türkiye**

Phone +90 (216) 528 50 00  
E-Mail info@sick.com.tr

**United Arab Emirates**

Phone +971 (0) 4 88 65 878  
E-Mail info@sick.ae

**USA/México**

Phone +1(952) 941-6780  
1 (800) 325-7425 – tollfree  
E-Mail info@sickusa.com

More representatives and agencies  
at [www.sick.com](http://www.sick.com)