



Laser scanners
LMS4xx / LMS400 / Indoor / Short Range

LMS400-1000



Model Name > [LMS400-1000](#)
Part No. > [1027897](#)



At a glance

- The Level Control feature, which is integrated into the sensor, features a gap-free scanning surface that can detect objects in containers, without any impairment from a shadow. Smaller objects, regardless of color, are detected at any place in the container.
- Large dynamic measurement range of 0.7 m to 3 m
- High ambient light immunity
- Rugged design
- High angular resolution
- Ideal for vision applications on pallets

Your benefits

- The integrated Level Control feature replaces a number of sensors and drastically reduces the effort required for wiring and programming
- Reliable detection at high conveyor speeds
- Neither shading nor artificial lighting is necessary
- Simple, flexible installation at positions beyond the robot collision area
- High accuracy detection and positioning measurements in real-time provide rapid data capture



Features

Field of application:	Indoor
Version:	Short Range
Reading field:	Front
Light source:	Visible red light (650 nm)
Laser class:	2, in standby mode laser class 1 according to IEC60825-1:2007
Field of view:	70 °
Scanning frequency:	180 Hz ... 500 Hz
Angular resolution:	0.1° ... 1.0°
Operating range:	0.7 m ... 3 m
Max. range with 10 % reflectivity:	3 m

Performance

Response time:	≥ 2 ms
Detectable object shape:	Almost any
Systematic error ¹⁾ :	± 4 mm

Statistical error ²⁾ :	± 10 mm ± 3 mm
Integrated application:	Level Control

^{1) 2)} Typical value; actual value depends on environmental conditions.

Interfaces

Serial (RS-232, RS-422):	✓
Function (Serial (RS-232, RS-422)):	Host, AUX
Ethernet:	✓
Function (Ethernet):	Host
Data transmission rate (Ethernet):	10 Mbit, half-duplex
Protocol (Ethernet):	TCP/IP
CAN bus:	-
PROFIBUS DP:	-
PROFINET:	-
DeviceNet:	-
Switching inputs:	4
Switching outputs:	5 (4 x PNP/analog 1 x 4 mA ... 20 mA)
Optical indicators:	6 LEDs

Mechanics/electronics

Operating voltage:	≤ 24 V DC ± 15 %
Power consumption:	25 W
Housing:	Die-cast aluminum
Housing color:	Light blue (RAL 5012)
Enclosure rating:	IP 20 (DIN 40 050) ¹⁾
Weight:	2.3 kg
Dimensions:	179 mm x 107 mm x 130 mm

¹⁾ With plug cover IP 65


Ambient data

Object remission:	6.5 % ... 200 %
Electromagnetic compatibility (EMC):	EN 61000G6G2:2001/EN 61000G6G4:2001
Vibration resistance:	EN 60068G2G6, G27, G29, G64
Shock resistance:	EN 60068G2G6, G27, G29, G64
Ambient operating temperature:	0 °C ... +40 °C
Storage temperature:	-20 °C ... +70 °C


General notes

Selectable region of interest (ROI):	From 50 mm x 3,000 mm to 1,000 mm x 1,750 mm
Number of columns:	Up to 50 equidistant or 30 freely positionable
Minimum column width:	50 mm
Minimum detectable object:	30 mm x 30 mm
Smallest height threshold above the container floor:	20 mm
Switching threshold output:	Telegram, switch outputs or analog output
Output of height values in the columns:	Analog output, Telegram
Note on use:	Not suitable for personnel protection

Dimensional drawing

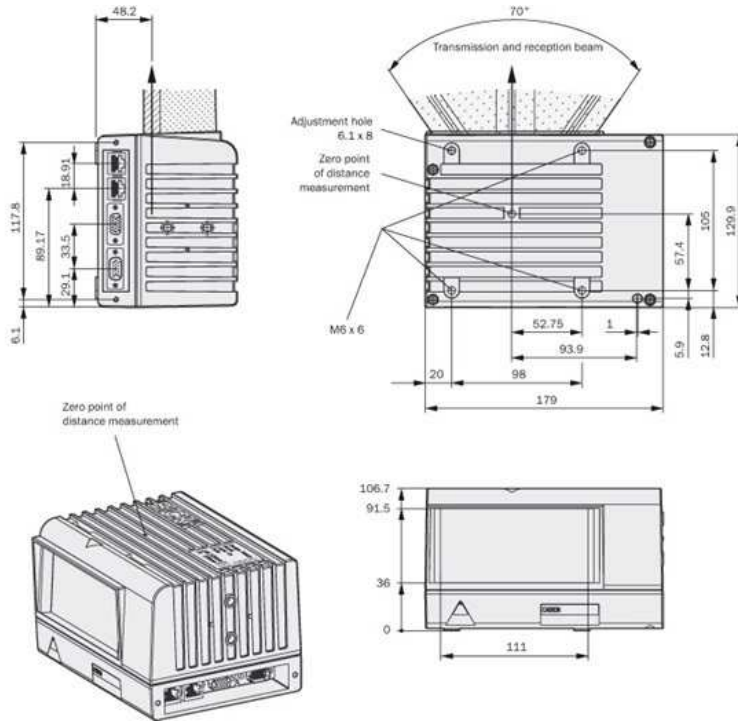

Operating range diagram

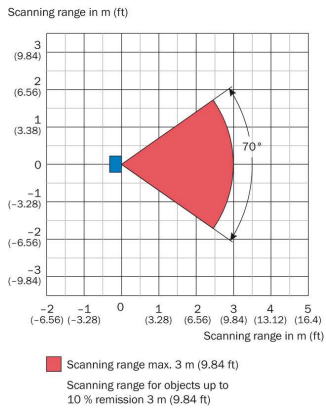

Australia

Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com