



Laser scanners  
LMS5xx / LMS511 / Outdoor / Mid Range

LMS511-10100 PRO



**Model Name** > **LMS511-10100 PRO**  
**Part No.** > **1046135**




**At a glance**

- Powerful and efficient laser measurement sensor for ranges of up to 80 m
- Outstanding performance in adverse environmental conditions due to multi-echo technology
- Up to IP 67 enclosure rating, built-in heater for outdoor versions, highly compact design
- Low power consumption
- Fast signal processing
- Multiple I/Os
- Synchronization of multiple sensors possible

**Your benefits**

- Superior performance in a vast range of applications
- Smallest sensor with highest accuracy in its class
- Comprehensive range of lines and models to suit all performance and price requirements
- Fast, reliable object detection in nearly any weather conditions
- Low power consumption reduces total cost of ownership
- Best price/performance ratio in this sensor class on the market
- Fast, easy commissioning due to SOPAS software
- Self-monitoring functions increase system availability



**Features**

Field of application:	Outdoor
Version:	Mid Range
Variant:	PRO
Resolution power:	Standard Resolution
Light source:	Infrared (905 nm)
Laser class:	1 (IEC 60825-1 (2007-6)), eye-safe
Field of view:	190 °
Scanning frequency:	25 Hz / 35 Hz / 50 Hz / 75 Hz / 100 Hz
Angular resolution:	0.167 ° 0.25 ° 0.333 ° 0.5 ° 0.667 ° 1 °
Heating:	Yes

Operating range:	0 m ... 80 m
Max. range with 10 % reflectivity:	40 m
Spot size:	11.9 mrad
Amount of evaluated echoes:	5
Fog correction:	Yes

## Performance

---

Response time:	≥ 10 ms
Detectable object shape:	Almost any
Systematic error <sup>1)</sup> :	± 25 mm (1 m ... 10 m) ± 35 mm (10 m ... 20 m) ± 50 mm (20 m ... 30 m)
Statistical error <sup>2)</sup> :	± 14 mm (20 m ... 30 m) ± 6 mm (1 m ... 10 m) ± 8 mm (10 m ... 20 m)
Integrated application:	Field evaluation
Number of field sets:	10 fields
Simultaneous processing cases:	10

1) 2) Typical value; actual value depends on environmental conditions.

## Interfaces

---

Serial (RS-232, RS-422):	✓
Function (Serial (RS-232, RS-422)):	Host
Data transmission rate (Serial (RS-232, RS-422)):	9.6 kBaud ... 500 kBaud
Ethernet:	✓
Function (Ethernet):	Host
Data transmission rate (Ethernet):	10/100 Mbit
Protocol (Ethernet):	TCP/IP, OPC
CAN bus:	✓
Function (CAN bus):	Outputs extension
PROFIBUS DP:	-
PROFINET:	-
DeviceNet:	-
USB:	✓
Function (USB):	AUX
Data transmission rate (USB):	9.6 kBaud ... 500 kBaud
Remark (USB):	Mini-USB
Switching inputs:	4 (Encoders)
Switching outputs:	6
Optical indicators:	5 LEDs (additional 7-segment display)

## Mechanics/electronics

---

Electrical connection:	4 x M12 circular plug-in connector
Operating voltage:	24 V DC
Power consumption:	22 W, + 55 W heating (typical)
Housing color:	Gray (RAL 7032)
Enclosure rating:	IP 67 (EN 60529, Section 14.2.7)
Protection class:	III (EN 60529, Section 14.2.7)
Weight:	3.7 kg
Dimensions:	160 mm x 155 mm x 185 mm


## Ambient data

Object remission:	2 % ... > 1,000 % (reflectors)
Electromagnetic compatibility (EMC):	EN 61000-6-2:2005/EN 61000-6-3 (2007-03)
Vibration resistance:	EN 60068-2-6 (1995-04)
Shock resistance:	EN 60068-2-27 (1993-03)/EN 60068-2-29 (1993-04)
Ambient operating temperature:	-30 °C ... +50 °C
Storage temperature:	-30 °C ... +70 °C
Ambient light immunity:	70,000 lx

## General notes

Note on use:	Not suitable for personnel protection
--------------	---------------------------------------

## Operating range diagram

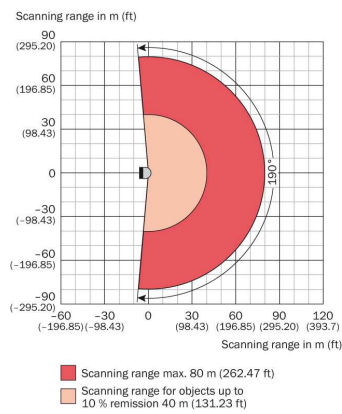

**Australia**

Phone +61 3 9457 0600  
1800 33 48 02 – tollfree  
E-Mail sales@sick.com.au

**Belgium/Luxembourg**

Phone +32 (0)2 466 55 66  
E-Mail info@sick.be

**Brasil**

Phone +55 11 3215-4900  
E-Mail marketing@sick.com.br

**Canada**

Phone +1 905 771 14 44  
E-Mail information@sick.com

**Česká republika**

Phone +420 2 57 91 18 50  
E-Mail sick@sick.cz

**China**

Phone +86 4000 121 000  
E-Mail info.china@sick.net.cn  
Phone +852-2153 6300  
E-Mail ghk@sick.com.hk

**Danmark**

Phone +45 45 82 64 00  
E-Mail sick@sick.dk

**Deutschland**

Phone +49 211 5301-301  
E-Mail info@sick.de

**España**

Phone +34 93 480 31 00  
E-Mail info@sick.es

**France**

Phone +33 1 64 62 35 00  
E-Mail info@sick.fr

**Great Britain**

Phone +44 (0)1727 831121  
E-Mail info@sick.co.uk

**India**

Phone +91-22-4033 8333  
E-Mail info@sick-india.com

**Israel**

Phone +972-4-6881000  
E-Mail info@sick-sensors.com

**Italia**

Phone +39 02 27 43 41  
E-Mail info@sick.it

**Japan**

Phone +81 (0)3 5309 2112  
E-Mail support@sick.jp

**Magyarország**

Phone +36 1 371 2680  
E-Mail office@sick.hu

**Nederland**

Phone +31 (0)30 229 25 44  
E-Mail info@sick.nl

**Norge**

Phone +47 67 81 50 00  
E-Mail sick@sick.no

**Österreich**

Phone +43 (0)22 36 62 28 8-0  
E-Mail office@sick.at

**Polska**

Phone +48 22 837 40 50  
E-Mail info@sick.pl

**România**

Phone +40 356 171 120  
E-Mail office@sick.ro

**Russia**

Phone +7-495-775-05-30  
E-Mail info@sick.ru

**Schweiz**

Phone +41 41 619 29 39  
E-Mail contact@sick.ch

**Singapore**

Phone +65 6744 3732  
E-Mail sales.gsg@sick.com

**Slovenija**

Phone +386 (0)1-47 69 990  
E-Mail office@sick.si

**South Africa**

Phone +27 11 472 3733  
E-Mail info@sickautomation.co.za

**South Korea**

Phone +82 2 786 6321/4  
E-Mail info@sickkorea.net

**Suomi**

Phone +358-9-25 15 800  
E-Mail sick@sick.fi

**Sverige**

Phone +46 10 110 10 00  
E-Mail info@sick.se

**Taiwan**

Phone +886 2 2375-6288  
E-Mail sales@sick.com.tw

**Türkiye**

Phone +90 (216) 528 50 00  
E-Mail info@sick.com.tr

**United Arab Emirates**

Phone +971 (0) 4 88 65 878  
E-Mail info@sick.ae

**USA/México**

Phone +1(952) 941-6780  
1 (800) 325-7425 – tollfree  
E-Mail info@sickusa.com

More representatives and agencies  
at [www.sick.com](http://www.sick.com)