



Photoelectric sensors
W11-2, Photoelectric retro-reflective sensor,
Standard optics

WL11-2P2432P07



Model Name > [WL11-2P2432P07](#)
Part No. > [1050674](#)



Illustration may differ

At a glance

- Retro-reflective with standard lens principle
- Rugged housing for industrial use
- PinPoint LED technology with highly visible light spot
- Space-saving plastic housing in chemically, thermally or mechanically resistant designs
- Dovetail mounting - standard mounting holes and oblong holes
- Highly visible 360° status LEDs
- Optional sensing range adjustment via teach-in pushbutton
- Operating distance up to 10 m

Your benefits

- Custom ASIC provides reliable object detection
- High immunity to optical interference reduces false readings and downtime
- PinPoint LED technology provides a bright, small and precise light spot that enables quick and easy sensor alignment
- Precise switching characteristics ensure high performance even in changing application conditions
- Rugged housing design withstands harsh environments, reducing downtime and maintenance effort
- Highly visible 360° status LEDs provide quick and easy setup without additional personnel or costly training
- Easy installation using SICK accessories



Features

| | |
|----------------------------------|--|
| Sensor/detection principle: | Photoelectric retro-reflective sensor, Standard optics |
| Dimensions (W x H x D): | 15.6 mm x 48.5 mm x 42 mm |
| Housing design (light emission): | Rectangular |
| Sensing range max.: | 0.15 m ... 10 m ¹⁾ |
| Sensing range: | 0.15 m ... 8 m ²⁾ |
| Type of light: | Visible red light |
| Light source: | LED ³⁾ |
| Wave length: | 640 nm |
| Teach-in: | Single teach-in button |
| Angle of dispersion: | Ca. 2.2 ° |
| Adjustment: | Teach-in |
| Light spot size (distance): | Ø 50 mm (3 m) |

1) 2) PL80A 3) Average service life of 100,000 h at $T_A = +25\text{ °C}$


Mechanics/electronics

| | |
|------------------------------------|---|
| Supply voltage: | 10 V DC ... 30 V DC ¹⁾ |
| Power consumption: | $\leq 30\text{ mA}$ ²⁾ |
| Output type: | PNP |
| Output function: | Complementary |
| Switching mode: | Light/dark switching |
| Signal voltage PNP HIGH/LOW: | $U_v - 2.5\text{ V}/\text{approx. } 0\text{ V}$ |
| Output current $I_{\text{max.}}$: | 100 mA |
| Response time: | $\leq 2.5\text{ ms}$ ³⁾ |
| Switching frequency: | 200 Hz ⁴⁾ |
| Connection type: | Connector M12, 4-pin |
| Circuit protection::: | A, C, D ^{5) 6) 7)} |
| Protection class: | II ⁸⁾ |
| Weight: | 120 g |
| Polarisation filter: | ✓ |
| Special device: | ✓ |
| Housing material: | ABS, Plastic |
| Optics material: | PMMA |
| Enclosure rating: | IP 66 IP 67 IP 69K |
| Items supplied: | Reflector P250 |
| Ambient operating temperature: | $-30\text{ °C} \dots 60\text{ °C}$ |
| Ambient storage temperature: | $-40\text{ °C} \dots 75\text{ °C}$ |
| UL File No.: | NRKH.E181493 & NRKH7.E181493 |

May not exceed or fall short of V_S tolerances;


1) Limit values, operation in short-circuit protected network max. 8 A connections reverse-polarity protected ⁶⁾ C = interference suppression
2) Without load ⁷⁾ D = outputs overcurrent and short-circuit protected
3) Signal transit time with resistive load
4) With light/dark ratio 1:1
5) $A = V_S$
8) Reference voltage DC 50 V

Dimensional drawing

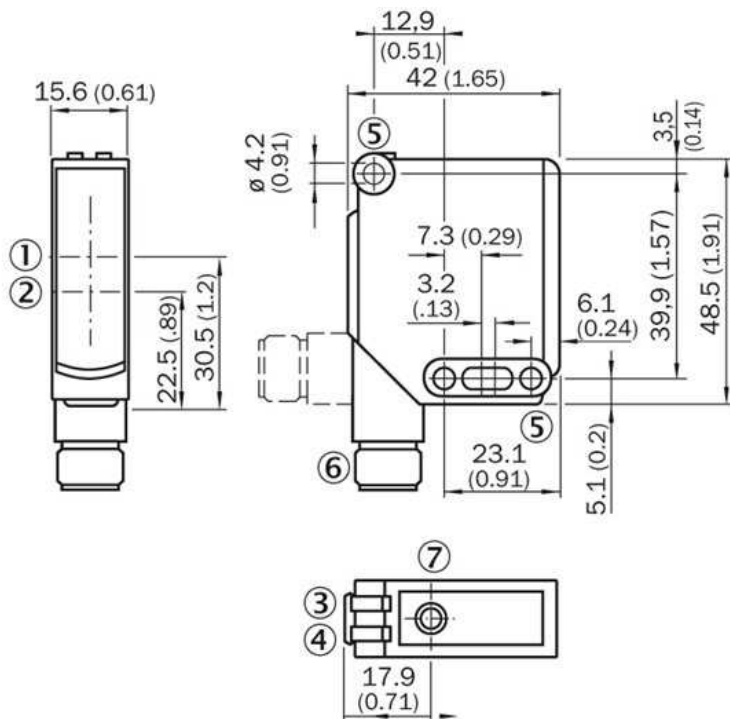

- |1| Optical axis, sender
- |2| Optical axis, receiver
- |3| Status indicator LED,
yellow: Status of received light beam
- |4| Status indicator LED green: power on
- |5| Mounting hole \varnothing 4.2 mm
- |6| Connector M12, 4-pin

Adjustments possible

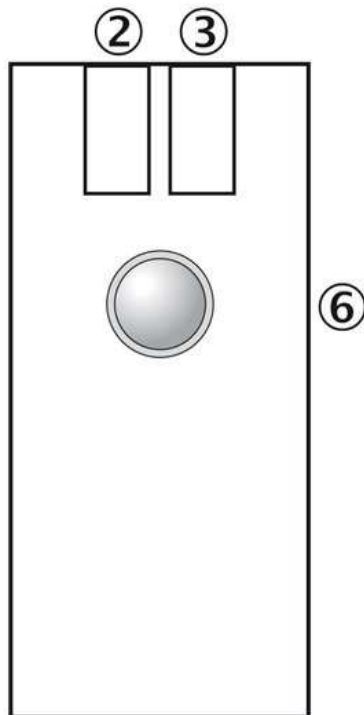


- |2| LED indicator yellow: Light received
- |3| LED indicator, green: power on,
teach-in mode I, LED indicator, blue: teach-in mode II
- |6| Single teach button, function 1:
teach-in sensitivity on reflector,
function 2: change operation/teach-in mode

Connection diagram




Characteristic curve

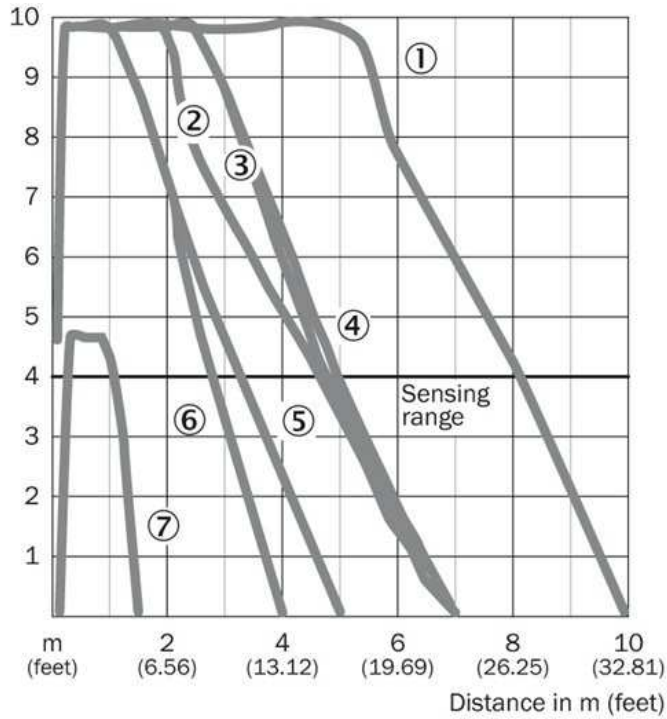

- |1| PL80A
- |2| C110A
- |3| PL50A
- |4| PL40A
- |5| PL30A
- |6| PL20A
- |7| Reflective tape Diamond Grade

Connection type

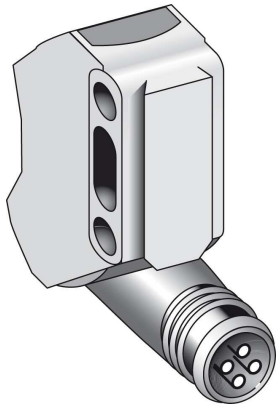

Australia

Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com