



Image-based code readers
ICR84x-2 FlexLens / ICR849-2L FlexLens

ICR849-2L1030 FlexLens



Model Name > [ICR849-2L1030 FlexLens](#)
Part No. > [1051931](#)



Illustration may differ


At a glance

- Configure with live image and auto setup
- Fast, omni-directional reading of printed and direct part marked 1D and 2D codes
- Rapid image and data transfer via Ethernet
- Adjustable reading distances with c-mount lense and illumination
- Industrial IP 65 housing (with optional hood and cap) for tough environmental conditions
- Adjustable reading distances with c-mount lense and illumination
- High-resolution, 4 megapixel imager for large field of view with high density codes

Your benefits

- Fast, cost-effective commissioning via easy user interface with live image and auto setup configuration
- Omni-directional identification of 1D and 2D codes makes it possible to identify objects that are not aligned
- High-speed, reliable decoding of low contrast and direct part marked codes guarantees secure identification and flexible use
- Different c-mount lens options and illumination types and colors make it ideal for a wide range of solutions
- Dynamic parameter switching makes decoding of different code qualities possible with just one setting
- Large reading area and 4 MP camera resolution allows code reading of high density codes at long distance

The product has been discontinued. Please follow the "replacement product" link for information about alternative products.

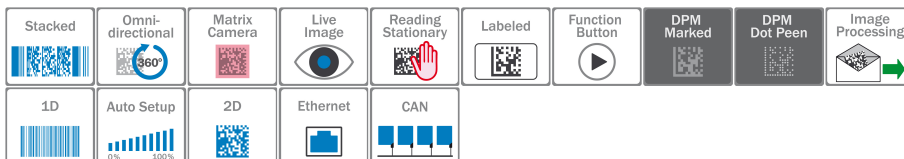

Features

Reading field:	Side
Focus:	Variable (per interchangeable lens)
Sensor:	CMOS matrix sensor
Sensor resolution:	2,048 px x 1,944 px x 4 megapixel)
Code resolution:	≥0.1 mm ¹⁾
Reading distance::	0.1 m ... 3 m ^{2) 3)}
Scanning frequency:	10 Hz, at full resolution
Light source:	External illumination

MTBF: 75,000 h

^{1) 2)} Depends on lens used; valid for Data Matrix, PDF417 and 1D codes with good printing quality ³⁾ For details see reading field diagram

Performance

Bar code types:	Interleaved 2 of 5, Codabar, Code 128, Code 39, GS1-128/EAN 128, Pharmacode, UPC/GTIN/EAN
2D code types:	Data Matrix ECC200, GS1 Data-Matrix, QR code
No. of codes per scan:	1 ... 50
No. of codes per reading interval:	1 ... 50
No. of characters per reading interval:	4,000

Interfaces

Serial (RS-232):	✓
Function (Serial (RS-232)):	Host, AUX
Data transmission rate (Serial (RS-232)):	300 Baud ... 57,600 Baud, AUX: 9,600 Baud
Ethernet:	✓
Function (Ethernet):	Host, AUX, image transmission
Data transmission rate (Ethernet):	10/100 Mbit
Protocol (Ethernet):	TCP/IP, FTP (image transmission), PROFINET (optional via external connection module CDM)
CAN bus:	✓
Function (CAN bus):	SICK CAN sensor network (Master/Slave, Multiplexer)
Data transmission rate (CAN bus):	10 kbit/s ... 1 Mbit/s
Protocol (CAN bus):	CANopen, CSN (SICK CAN Sensor Network)
PROFIBUS DP:	✓
Remark (PROFIBUS DP):	Optional via external connection module (CDM + CMF)
DeviceNet:	✓
Remark (DeviceNet):	Optional via external connection module (CDM + CMF)
Acoustic indicators:	Beeper/buzzer (can be switched off, can be assigned a function to signal a result)
Optical indicators:	6 LEDs (status displays)
Switching inputs:	2
Switching outputs:	2 (Result 1 NPN, Result 2 PNP)
Reading pulse:	Non-powered, Switching inputs, Serial interface

Mechanics/electronics

Operating voltage:	15 V DC ... 30 V DC
Power consumption:	8 W
Electrical connection:	1, 1 x M12 cylindrical connector (4-pin female connector, Ethernet)
Housing:	Die-cast zinc
Housing color:	Light blue (RAL 5012)
Weight:	900 g, with connecting cable
Dimensions:	123.3 mm x 80 mm x 39 mm
Enclosure rating:	IP 30, IP 65 (EN 60529) ^{1) 2)}
Protection class:	III (EN 61140)
Lens:	C-mount

¹⁾ For installed IP 65 Ethernet cable and IP 65 lens cover or for IP 65 cover and IP 65 lens cover ²⁾ Without covered Ethernet connection or with standard Ethernet cable and without lens cover.


Ambient data

Electromagnetic compatibility (EMC):	EN 61000-6-2/EN 61000-6-4
Vibration resistance:	EN 60068-2-6
Shock resistance:	EN 60068-2-27
Ambient operating temperature:	0 °C ... +40 °C
Storage temperature:	-20 °C ... +70 °C
Permissible relative humidity:	± 90 %, non-condensing
Ambient light immunity:	2,000 lx, on bar code

General notes

Items supplied:	Single scanner
Life cycle phase:	Phased out

Reading field diagram

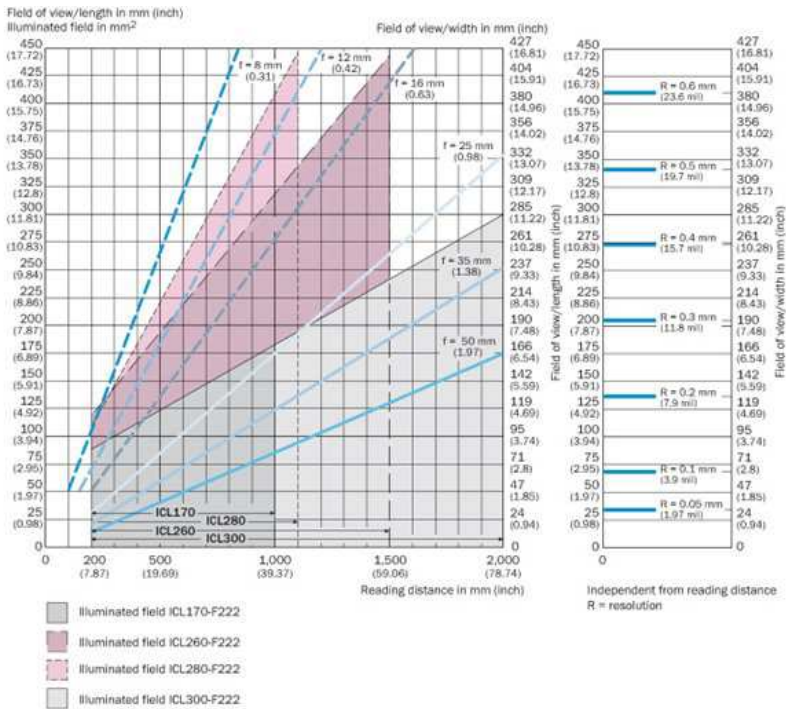

Australia

Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com