



Linear measurement sensors OLM200

OLM200-1008



Model Name > **OLM200-1008**
Part No. > **1058813**




At a glance

- Integrated 2-port switch EtherNet/IP interface
- Measurement range up to 10 km
- Adjustable resolution as low as 0.1 mm
- Maximum speed of 10 m/s
- Output of position and speed data, as well as service diagnostics via EtherNet/IP
- Compatible to SPEEDCON™ connectors and standard M12 connectors
- Large temperature range from -30 °C to +60 °C

Your benefits

- High travel speed linked to precise positioning increases system efficiency and improves throughput
- Camera-based system with no moving parts increases the sensor's service life, thus reducing lifecycle costs considerably
- Fieldbus interfaces (PROFIBUS, PROFINET, and EtherNet/IP) offer highest flexibility and easiest system integration, hence saving costs for interface converters and protocol adaption
- Status bit for pre-failure notification and preventive maintenance eliminates unpredicted machine downtimes
- The large temperature range from -30°C to +60°C offers reliable use in many applications



Performance

Resolution:	0.1 mm, 1 mm, 10 mm, 100 mm
Repeatability ¹⁾ :	0.15 mm
Response time ²⁾ :	10 ms
Light source:	LED, red
Measurement range ³⁾ :	0 m ... 10,000 m
Bar code width:	30 mm
Sensing distance:	100 mm, ± 20 mm
Max. movement speed:	10 m/s
Accuracy of speed output:	± 5 mm/s
Output time:	2.5 ms

¹⁾ Statistical error 3 σ, no warm-up time required ²⁾ Response time of switching output ³⁾ Dependant on the set resolution and transfer protocol

Interfaces

Data interface:	EtherNet/IP ¹⁾
Output type ²⁾ :	Multifunctional output MF1: PNP Multifunctional output MF1: NPN
Data transmission rate:	100 Mbit/s
Switching input:	Multifunctional input MF2

¹⁾ Industrial level mit Device Level Ring (DLR) ²⁾ Functions of switching output MF1 PNP/MF1 NPN: position, speed, control mark Q00 (off), Q01 (on), illumination on/off, service [prefailure (dirt/LED life time), no bar code tape, over/under temperature, out of range 0 km > position > 10 km, internal error]

Mechanics/electronics

Output current I _A ¹⁾ :	≤ 100 mA
Supply voltage V _s ²⁾ :	DC 18 V ... 30 V
Ripple ³⁾ :	≤ 5 V _{pp}
Power consumption:	< 5.5 W
Initialization time:	10 s
Housing material:	Magnesium zinc
Weight:	Ca. 291 g


¹⁾ Switching outputs MF1 short-circuit protected ²⁾ Limit values, reverse-polarity protected ³⁾ May not exceed or fall below U_v tolerances

Ambient data

Enclosure rating:	IP 65 (EN 60 529)
Protection class:	III
Ambient temperature ^{1), 2)} :	Operation: -30 ... +60 °C, Storage: -40 ... +75 °C
Vibration resistance:	DIN/EN 60068-2-6, DIN/EN 60068-2-64
Shock resistance:	DIN/EN 60068-2-27
Electromagnetic compatibility (EMC):	EN 61000-6-2/EN 61000-6-4 ³⁾
Typ. ambient light safety:	≤ 30,000 lx ⁴⁾


¹⁾ Temperatures < -20 °C with 5 min warm up time ²⁾ Max. 95 % humidity, non-condensing ³⁾ This is a Class A device. This device can cause radio interference in living quarters. ⁴⁾ Typ. value at +25 °C ambient temperature

Dimensional drawing

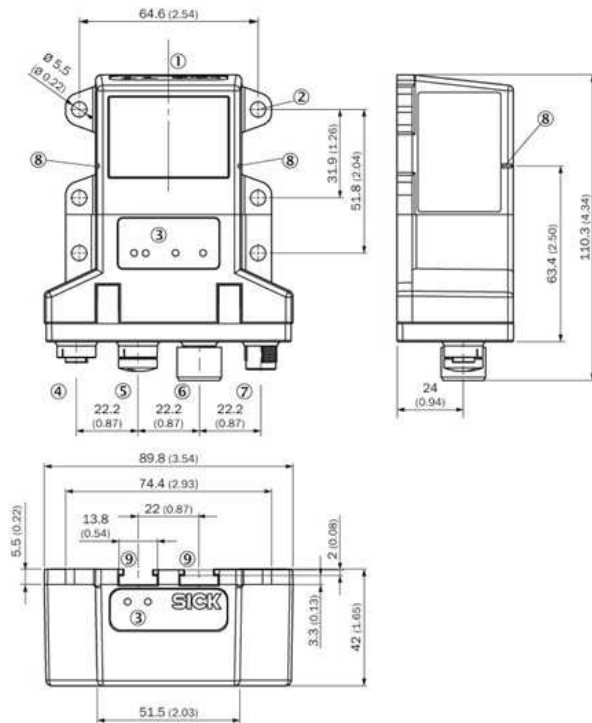

- |1| Reference axis position measurement
- |2| Mounting holes
- |3| Status LED [status]
- |4| EtherNet port 1, socket M12, 4-pin
- |5| EtherNet port 2, socket M12, 4-pin
- |6| not connected
- |7| Connector M12, 5-pin
- |8| Adjustment aid (slot)
- |9| T-slot


Connection type

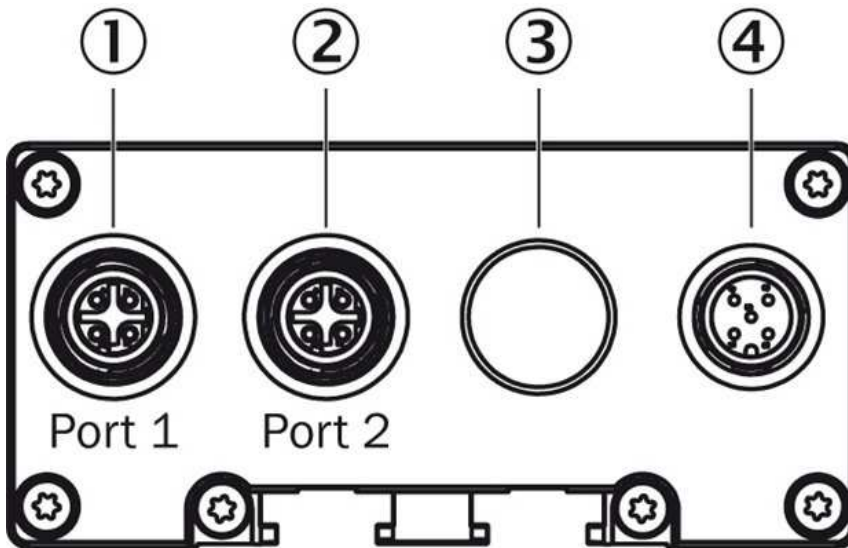

- |1| EtherNet port 1, socket M12, 4-pin
- |2| EtherNet port 2, socket M12, 4-pin
- |3| not connected
- |4| Connector M12, 5-pin

Connection diagram

①/②




M12 (D-coded)

③

not connected

④



M12 (A-coded)

- |1| EtherNet, socket M12, 4-pin
- |2| EtherNet, socket M12, 4-pin
- |3| not connected
- |4| Connector M12, 5-pin

Australia

Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com