



Hand-held scanners IDM26x / IDM260 Coded / Industrial / Standard Range

IDM260-100S



Model Name > [IDM260-100S](#)
Part No. > [6050652](#)

At a glance

- Identification of all current 1D, stacked, and 2D codes
- Reliable, secure, and fast code reading
- Rugged, stable housing with IP 65 enclosure rating
- Supports all common corded and cordless interfaces as well as industrial fieldbuses via SICK connectivity
- Good read feedback via LED, beeper, and vibration
- Decoding algorithms ideal for direct part marked codes (depending on type)

Your benefits

- Only one device for a wide range of different code types
- Fast and accurate identification without manual data entry
- Highly reliable thanks to industrial enclosure rating and rugged housing
- Simple and flexible integration in industrial fieldbus networks using SICK connectors
- Simple, intuitive operation thanks to multiple read confirmation
- Direct expert advice all over the world from the SICK sales and service network
- Low contrast or highly reflective DPM codes are identified reliably



Features

Field of application:	Industrial
Version:	Standard Range
Scanner design:	2D code hand-held scanner
Light source:	Lighting LEDs: visible red light (630 nm) aiming laser: visible red light (630 nm)
Code resolution::	≥0.08 mm, ≥0.18 mm ^{1) 2)}
Reading distance:	30 mm ... 380 mm ³⁾
Scanning frequency:	60 Hz

¹⁾ Valid for Code 39 ²⁾ Valid for Data Matrix code ³⁾ For details see reading field diagram

Performance

Supported code type:	1D, 2D, Stacked
----------------------	-----------------

Bar code types:	Australian Post, China Post, German Post, US Planet, US Postnet, British Post, Intelligent Mail, Japan Post, Korean Post, Dutch KIX Post, Codabar, Code 11, Code 128, Code 32, Code 39, Code 39 Trioptic, Code 93, GS1 DataBar, GS1-128/EAN 128, IATA, Interleaved 2 of 5, Matrix 2 of 5, MSI/Plessey, Standard and Industrial 2 of 5, Telepen, UK/Plessey, UPC/EAN/JAN (with addition)
2D code types:	Aztec, Data Matrix, MaxiCode, MicroQR-Code, QR code
Stacked code types:	Codablock, Code 16K, Code 49, Composite, MicroPDF417, PDF417

Interfaces

Serial:	✓
Function (serial):	RS-232 TTL
Ethernet:	✓
Protocol (Ethernet):	TCP/IP (optional via external connection module CDM + CMF), PROFINET (optional via external connection module CDF600-2), EtherCAT (optional via external connection module CDF600)
Remark (Ethernet):	Optional via external connection or fieldbus module
PROFIBUS DP:	✓
Remark (PROFIBUS DP):	Optional via external connection module (CDF600-2)
DeviceNet:	✓
Remark (DeviceNet):	Optional via external connection module (CDM + CMF)
PS/2:	✓
Function (PS/2):	Keyboard wedge
USB:	✓
Function (USB):	Keyboard wedge, COM-Port emulation
Bluetooth:	-
Optical indicators:	2 LEDs (operational status, good read)
Acoustic indicators:	Beeper, disengageable
Vibration:	Yes
Configuration software:	IDM Setup Tool


Mechanics/electronics

Operating voltage:	5 V DC± 5 %
Power consumption:	Operation (vibration activated): ≤ 335 mA, Operation (vibration deactivated): ≤ 285 mA, Standby: ≤ 150 mA
Housing color:	Blue, gray
Enclosure rating:	IP 65
Weight:	208 g, without cable
Dimensions:	104 mm x 76.3 mm x 176 mm

Ambient data

Ambient operating temperature:	-20 °C ... +50 °C
Storage temperature:	-40 °C ... +70 °C
Permissible relative humidity:	95 %, non-condensing
Shock resistance:	50 drops From 2 m height on concrete
Ambient light immunity:	100,000 lx

Code resolution in mm (mil)

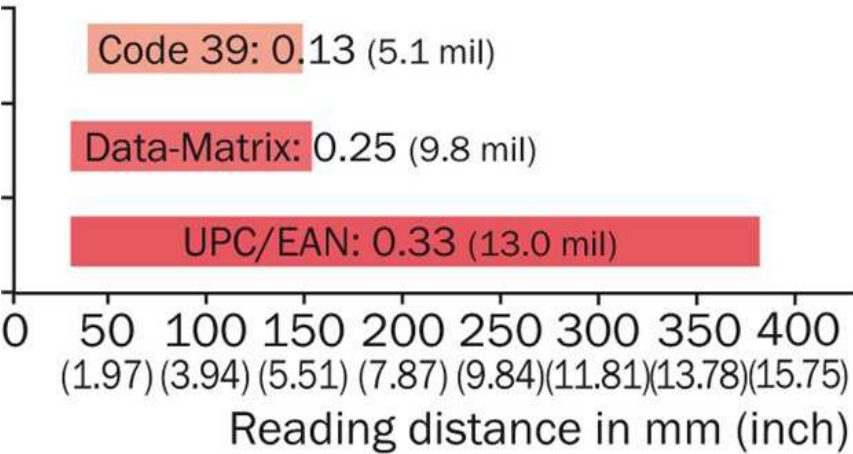

Australia

Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com