Diffuse reflection light scanners with background suppression







5 ... 3000 mm 1,200 mm with black-white error < 10%



- Scanner with adjustable background suppression in infrared version for extremely high detection reliability
- Reliable detection of objects with different surface structures
- Large adjustment range and minimal zero distance for optimum adaptation to the application
- Highly visible status displays
- Exact switching point adjustment through mechanical adjusting spindle
- Extremely high repeatability of the switching point
- Activation input for sensor test
- Various switching output functions for universal connection to existing control environment
- A²LS active ambient light suppression for avoiding mutual interference
- Robust plastic housing in degrees of protection IP67 and IP69K
















Accessories:

(available separately)

- Mounting systems (BT 46, BTU 300M, BT 300, BTU 346)
- M12 connectors (KD ...)
- Ready-made cables (K-D ...)

Dimensioned drawing

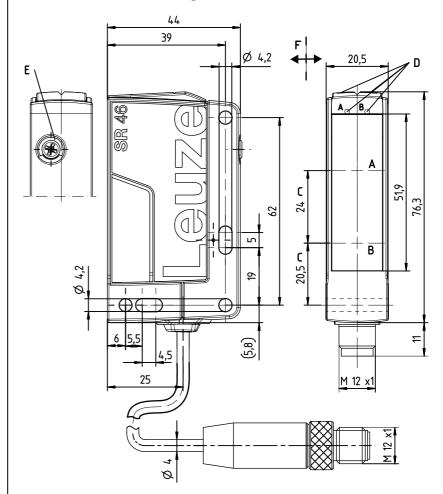

A Receiver

B TransmitterC Optical axis


D_A Green indicator diode

D_B Yellow indicator diode

E Scanning range adjustment

F Preferred movement for objects

Electrical connection



Selection pin 2

ſ	*)	OUT	IN
		OUT 2	Active
		Warn	
		NC	

Specifications

Optical data

Typ. scanning range limit (white 90%) 1) Scanning range 2) Black-white error

5 ... 3000mm

see diagrams <10% up to 1200mm

250Hz

≤ 30mA

output

ready

plastic

plastic

reflection

≥ (U_B-2V)/≤ 2V max. 100mA

/4X /4W

/48

2_{ms} ≤ 300 ms

mechanical adjusting spindle 120 ... 3000 mm LED (modulated light)

10 ... 30 VDC (incl. residual ripple) \leq 15 % of U_B

reflection, no function reserve

with 2000mm cable: approx.

cable 2000 mm, 4 x 0.21 mm²

-40°C ... +60°C/-40°C ... +70°C

exempt group (in acc. with EN 62471) IEC 60947-5-2 UL 508, CSA C22.2 No.14-13 ^{4) 8)}

PNP transistor, counting principle

with 200mm cable and M12 connector:

M12 connector, 4-pin cable 200mm with M12 connector, 4-pin

with M12 connector:

2, 3 II, all-insulated

IP 67, IP 69K

≥ (U_B-2V)/≤ 2V max. 100mA

≥ 8 V/≤ 2 V

≤ 1 ms/≤ 2 ms

2 PNP switching outputs, antivalent 1 PNP switching output, light switching 1 PNP switching output, light switching, 1 PNP warning

1 PNP switching output, light switching, 1 activation input 1 PNP switching output, dark switching 2 NPN switching outputs, antivalent

860nm (infrared light)

Scanning range adjustment

Adjustment range Light source 3) Wavelength

Timing

Switching frequency Response time
Delay before start-up

Electrical data

Operating voltage U_B ⁴⁾ Residual ripple Open-circuit current

Switching outputs/functions 5)

Signal voltage high/low

Output current

Indicators

Green LED Yellow LED

Yellow LED, flashing

Mechanical data

Housing Optics cover Weight

Connection type

Environmental data Ambient temp. (operation/storage) Protective circuit ⁶⁾

VDE safety class 7) Degree of protection Light source

Standards applied Certifications

Options Warning output

Signal voltage high/low Output current **Activation input**

Transmitter active/not active Activation/disable delay Input resistance

 $10K\Omega \pm 10\%$

Typ. scan. range limit: max. achievable scanning range for light objects (white 90%) Scanning range: recommended scanning range for objects with different diffuse reflection Average life expectancy 100,000 h at an ambient temperature of 25°C

For UL applications: for use in class 2 circuits only

See part number code

2=polarity reversal protection, 3=short circuit protection for all transistor outputs

Rating voltage 50V


These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

Tables

1	5			3000
2	20		2000	
3	50	1500		
1	white 90%			
2	gray 18%			
3	black 6 %			

Scanning range [mm]

Diagrams






approx. 60g

approx. 65 g

100g

Typ. black/white behavior



A white 90%

B gray 18%

C black 6%



Remarks

Operate in accordance with intended use!


This product is not a safety sensor and is not intended as personnel protection.

The product may only be put into operation by competent persons. Sonly use the product in accor-

dance with the intended use.

Diffuse reflection light scanners with background suppression

Part number code

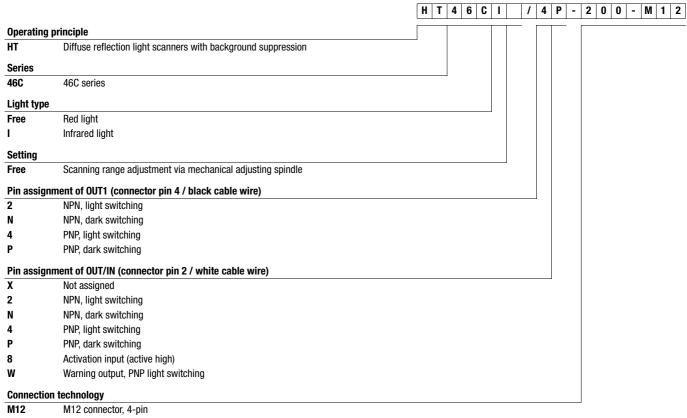

200-M12 Cable 200 mm with M12 connector, 4-pin

Free Cable 2000 mm

Order guide

The sensors listed here are preferred types; current information at www.leuze.com.

Red-light diffuse reflection light scanner with background suppression	Designation	Part no.
With M12 connector, 4-pin		
OUT1: PNP light switching; OUT2: PNP dark switching	HT46CI/4P-M12	50127061
OUT1: PNP light switching; OUT2: no contact 1)	HT46CI/4X-M12	50127063
OUT1: PNP light switching; IN: activation input active high	HT46CI/48-M12	50127066
OUT1: PNP light switching; OUT2: warning output PNP active high	HT46CI/4W-M12	50127067
OUT1: PNP dark switching; OUT2: no contact 1)	HT46CI/PX-M12	50127064
OUT1: NPN light switching; OUT2: NPN dark switching	HT46CI/2N-M12	50129671
Cable 0.2m with M12 connector, 4-pin		
OUT1: PNP light switching; OUT2: PNP dark switching	HT46CI/4P-200-M12	50129751
OUT1: PNP dark switching; OUT2: no contact 1)	HT46CI/PX-200-M12	50127065
Cable 2m		
OUT1: PNP light switching; OUT2: PNP dark switching	HT46CI/4P	50127062

¹⁾ Direct connection to AS-i coupling modules possible

HT46Cl... - 01 2015/06