

## D/A-CONVERTER 8-BIT - OUTPUT 0 ... 10V


IN: 8 Bit - OUT: 0-10 VDC


D/A converter  
8 Bit  
0...10 V DC

Input and output galvanically separated

### [Link to Product](#)

#### Illustration

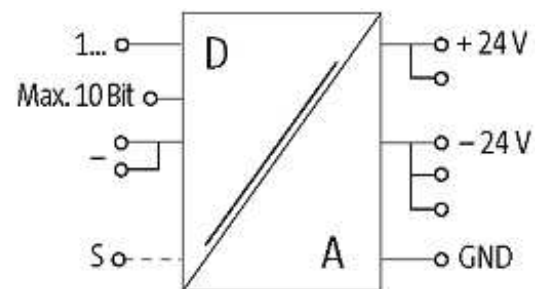

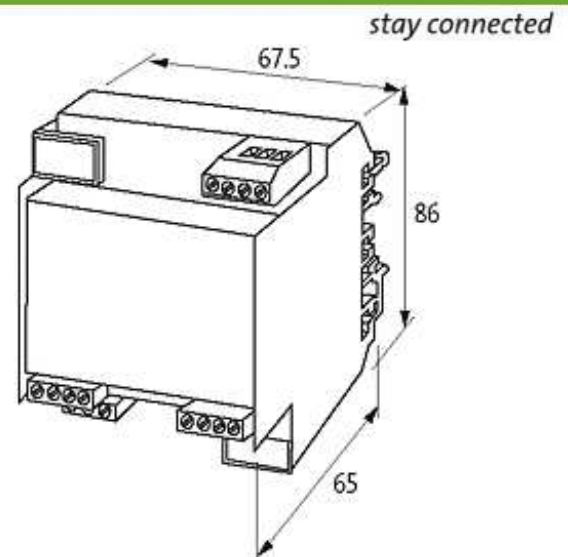

Product may differ from Image

### Input

Input signal	0...30 V DC (with LED display)
Input current	max. 10 mA/Bit

### General data

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+50 °C
Dimensions H × W × D	65×67.5×86 mm

### Output

Output current	max. 40 mA (0...10 V DC); max. 20 mA (0...20 mA), 4...20 mA
----------------	---

### Description

Functional description

The maximum output signal of converters with voltage output can be adjusted to the operating voltage minus 2 V. The outputs are short-circuit protected and overload protected due to internal current limiting.

### Commercial data

country of origin	CZ
customs tariff number	85437090
minimum order quantity	1