



DILK12-11, XTCC012C...
DILK20-11, XTCC020C...
DILK25-11, XTCC025C...
DILK33-10, XTCC033C...
DILK50-10, XTCC050C...

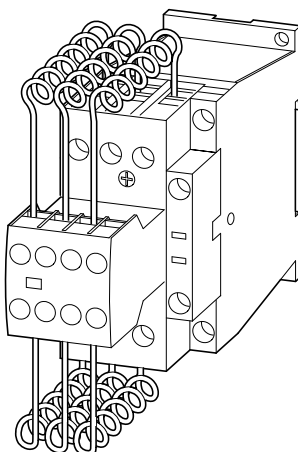


- (en) Screw fixing
(de) Schraubbefestigung
(fr) Fixation par vis
(es) Fijación por tornillo
(it) Fissaggio a vite
(zh) 固定螺栓
(ru) Крепление под винты



[mm]	a	b	
DILK12, XTCC012C	35	75	2 x M4
DILK20, XTCC020C	35	75	2 x M4
DILK25, XTCC025C	35	75	2 x M4
DILK33, XTCC033C	45	105	4 x M4
DILK50, XTCC050C	45	105	4 x M4
[inch]	a	b	
DILK12, XTCC012C	1.38	2.95	2 x M4
DILK20, XTCC020C	1.38	2.95	2 x M4
DILK25, XTCC025C	1.38	2.95	2 x M4
DILK33, XTCC033C	1.77	4.13	4 x M4
DILK50, XTCC050C	1.77	4.13	4 x M4

- (en) Terminations
(de) Anschluss Technik
(fr) Technique de raccordement
(es) Técnica de conexión
(it) Tipi di collegamento
(zh) 连接技术
(ru) Техника присоединения

DILK12 DILK20, XTCC020C... DILK25, XTCC025C...	
	mm ²
	1 x (0.75 - 16)
	2 x (0.75 - 10)
	1 x (0.75 - 10)
	2 x (0.75 - 10)
	1 x 16
	—
AWG	14 - 8
Nm	3.2
lb-in	28



(en) Electric current! Danger to life!

Only skilled or instructed persons may carry out the following operations.

(de) Lebensgefahr durch elektrischen Strom!

Nur Elektrofachkräfte und elektrotechnisch unterwiesene Personen dürfen die im Folgenden beschriebenen Arbeiten ausführen.

(fr) Tension électrique dangereuse !

Seules les personnes qualifiées et averties doivent exécuter les travaux ci-après.

(es) ¡Corriente eléctrica! ¡Peligro de muerte!

El trabajo a continuación descrito debe ser realizado por personas cualificadas y advertidas.

(it) Tensione elettrica: Pericolo di morte!

Solo persone abilitate e qualificate possono eseguire le operazioni di seguito riportate.

(zh) 触电危险!


只允许专业人员和受过专业训练的人员进行下列工作。

(ru) Электрический ток! Опасно для жизни!

Только специалисты или проинструктированные лица могут выполнять следующие операции.



- (en) Mounting position
(de) Einbaulage
(fr) Position de montage
(es) Posición de montaje
(it) Posizione di montaggio
(zh) 安装位置
(ru) Положение установки



A1/A2 13/14 21/22	mm ²	AWG	Nm	lb-in
	0.75 - 2.5	14 - 18	1.2	10.6

DILK33, XTCC033C...
DILK50, XTCC050C...
a = 14 mm (a = 0.55")

	mm ²
	1 x (0.75 - 16)
	2 x (0.75 - 16)
	1 x (0.75 - 35)
	2 x (0.75 - 25)
	1 x (0.75 - 35)
	2 x (0.75 - 25)
	1 x (16 - 50)
	2 x (16 - 35)
	1 x (6 x 9 x 0.8)
	2 x (6 x 9 x 0.8)
Single AWG	14 - 1
Double AWG	14 - 2
Nm	3
lb-in	28