



# Hydraulic Motor/Pump

Series F11/F12  
Fixed Displacement

aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
**hydraulics**  
pneumatics  
process control  
sealing & shielding



[parker.com/pmde](http://parker.com/pmde)



ENGINEERING YOUR SUCCESS.

**Basic formulas for hydraulic motors**

Flow (q)

$$q = \frac{D \times n}{1000 \times \eta_v} \text{ [l/min]}$$

Torque (M)

$$M = \frac{D \times \Delta p \times \eta_{hm}}{63} \text{ [Nm]}$$

Power (P)

$$P = \frac{q \times \Delta p \times \eta_t}{600} \text{ [kW]}$$

D - displacement [cm<sup>3</sup>/rev]

n - shaft speed [rpm]

 $\eta_v$  - volumetric efficiency $\Delta p$  - differential pressure [bar]  
(between inlet and outlet) $\eta_{hm}$  - mechanical efficiency $\eta_t$  - overall efficiency  
( $\eta_t = \eta_v \times \eta_{hm}$ )**Basic formulas for hydraulic pumps**

Flow (q)

$$q = \frac{D \times n \times \eta_v}{1000} \text{ [l/min]}$$

Torque (M)

$$M = \frac{D \times \Delta p}{63 \times \eta_{hm}} \text{ [Nm]}$$

Power (P)

$$P = \frac{q \times \Delta p}{600 \times \eta_t} \text{ [kW]}$$

D - displacement [cm<sup>3</sup>/rev]

n - shaft speed [rpm]

 $\eta_v$  - volumetric efficiency $\Delta p$  - differential pressure [bar]  
(between inlet and outlet) $\eta_{hm}$  - mechanical efficiency $\eta_t$  - overall efficiency  
( $\eta_t = \eta_v \times \eta_{hm}$ )**Conversion factors**

|                   |                 |
|-------------------|-----------------|
| 1 kg              | 2.20 lb         |
| 1 N               | 0.225 lbf       |
| 1 Nm              | 0.738 lbf ft    |
| 1 bar             | 14.5 psi        |
| 1 l               | 0.264 US gallon |
| 1 cm <sup>3</sup> | 0.061 cu in     |
| 1 mm              | 0.039 in        |
| 1 °C              | 5/9(°F-32)      |
| 1 kW              | 1.34 hp         |

**Conversion factors**

|             |                        |
|-------------|------------------------|
| 1 lb        | 0.454 kg               |
| 1 lbf       | 4.448 N                |
| 1 lbf ft    | 1.356 Nm               |
| 1 psi       | 0.068948 bar           |
| 1 US gallon | 3.785 l                |
| 1 cu in     | 16.387 cm <sup>3</sup> |
| 1 in        | 25.4 mm                |
| 1 °F        | 9/5 °C + 32            |
| 1 hp        | 0.7457 kW              |

**WARNING – USER RESPONSIBILITY**

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

**Offer of Sale**

Please contact your Parker representation for a detailed "Offer of Sale".

**General product information**

General information and design, Bearing life, F11/F12 Fan motors, F11/F12 in saw motor applications, Parker Power Boost

**General product information**

Pages 4 - 7

**1****Series F11**

Bent axis piston pump/motor with fixed displacement

**F11**

Pages 8 - 37

**2****Series F12**

Bent axis piston pump/motor with fixed displacement

**F12**

Pages 38 - 57

**3****Accessories**

Flushing valves, FV13 flushing valve block, Integrated pressure relief valve, SR pressure relief/anticavitation valve block, SV pressure relief valve block, Speed sensor, BLA Boost units

**Accessories**

Pages 58 - 66


**4****Installation and start up information**

F11, F12

**Installation and start up information**

Pages 67 - 69

**5**

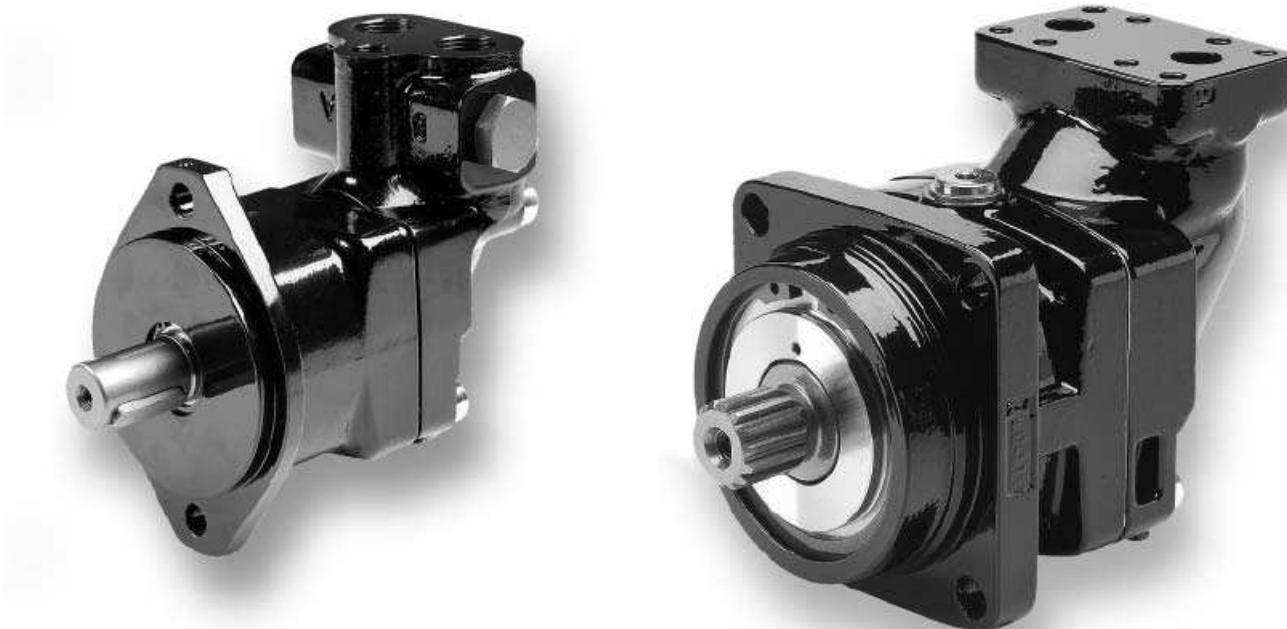

### **Series F11**

F11 is a bent-axis, fixed displacement motor/pump. It can be used in numerous applications in both open and closed loop circuits.

The F11 series is available in sizes 5, 6, 10, 12, 14 and 19 cc.

#### **F11 Features**

- Max intermittent pressure up to 420 bar and continuous operating pressure up to 350 bar
- Thanks to low weight pistons and a compact design of the rotating parts, the F11 tolerates very high speeds, up to 14000 rpm
- CETOP, ISO, SAW and SAE versions

#### **General Features**

- The laminated piston ring offers important advantages such as unbeatable efficiency and thermal shock resistance
- High allowable speeds and operating pressures means high output power
- The unique piston locking, timing gear and bearing set-up as well as the limited number of parts add up to a very robust design with long service life and, above all, proven reliability.
- The 40° angle between shaft and cylinder barrel allows for a very compact, lightweight motor/pump.
- Small envelop size and a high power-to-weight ratio
- The motor version has highly engineered valve plates for high speed and low noise
- The pump version has highly engineered valve plates for increased self priming speed and low noise, available with left and right hand rotation.
- The F11's and F12's have a simple and straight-forward design with very few moving parts, making them very reliable motors/pumps.
- Our unique timing gear design synchronizes shaft and cylinder barrel, making the F11/F12 very tolerant to high 'G' forces and torsional vibrations.
- Heavy duty roller bearings permit substantial external axial and radial shaft loads.

### **Series F12**

F12 is a bent-axis, fixed displacement motor/pump. It can be used in numerous applications in both open and closed loop circuits.

The F12 series is available in sizes 30, 40, 60, 80, 90, 110, 125, 150 and 250 cc.

#### **F12 Features**

- Max intermittent pressure up to 480 bar and continuous operating pressure up to 420 bar
- The 7 or 9 piston design provides high start-up torque and smooth motor operation
- ISO, CETOP, Cartridge and SAE versions


## Bearing life

### General information

Bearing life can be calculated for that part of the load/life curve (shown below) that is designated 'Bearing fatigue'. 'Rotating group fatigue and wear' and 'Other' caused by material fatigue, fluid contamination, etc. should also be taken into consideration when estimating the service life of a motor/pump in a specific application.

Bearing life calculations are mainly used when comparing different frame sizes. Bearing life, designated  $B_{10}$  (or  $L_{10}$ ), is dependent of system pressure, operating speed, external shaft loads, fluid viscosity in the case, and fluid contamination level.

The  $B_{10}$  value means that 90% of the bearings survive, at a minimum, the number of hours calculated. Statistically, 50% of the bearings will survive at least five times the  $B_{10}$  life.

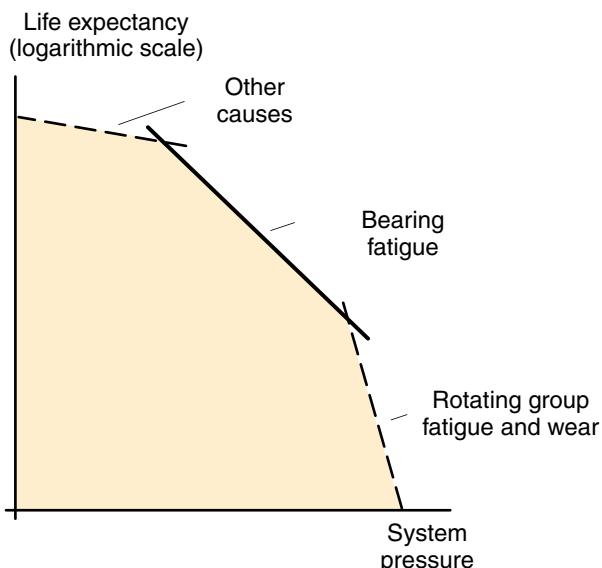

Hydraulic unit life versus system pressure.

### Bearing life calculation

An application is usually governed by a certain duty or work cycle where pressure and speed vary with time during the cycle.

In addition, bearing life depends on external shaft forces, fluid viscosity in the case and fluid contamination.

Parker Hannifin has a computer program for calculating bearing life and will assist in determining F11 or F12 motor/pump life in a specific application.

### Required information

When requesting a bearing life calculation from Parker Hannifin, the following information (where applicable) should be provided:

- A short presentation of the application
- F11 or F12 size and version
- Duty cycle (pressure and speed versus time at given displacements)
- Low system pressure
- Case fluid viscosity
- Life probability ( $B_{10}$ ,  $B_{20}$ , etc.)
- Operating mode (pump or motor)
- Direction of rotation (L or R)
- External shaft loads (Forces, Gear, Belt, Cardan or none)

For forces please provide:

- Axial load, Fixed radial load, Bending moment, Rotating radial load and distance flange to radial load.

For Gear please provide:


- Pitch diameter, Pressure angle, Spiral angle, Distance flange – gearwheel (mid) and Gearwheel spiral direction (R or L).

For Belt please provide:

- Pretension, Coefficient of friction, Angle of contact, Distance flange – pulley (mid) and Diameter pulley.

For Cardan please provide:

- Shaft angle, Distance flange – first joint and distance between joints
- Angle of attack ( $\alpha$ ) as defined below

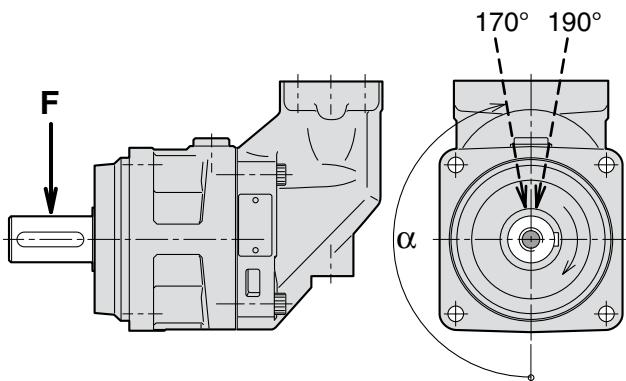

The direction ( $\alpha$ ) of the radial load is positive in the direction of rotation as shown.

To obtain maximum bearing life, the radial load should, in most cases, be located between 170° and 190°.

## F11/F12 Fan motors

F11/F12 motors, in frame sizes -5 to -40 cc, are common in Fan applications. Some typical options are, built in check valve, pressure relief valve, cartridge flange and tapered shaft (refer to the schematic to the right).

The fan motor can be operated at very high speeds without reliability problems. The fan is usually installed directly on the motor shaft without additional bearing support. The F11/F12 has up to 95% overall efficiency which reduces the diesel consumption and minimizes the cooling demand.

## Fan motor circuit

Because of the built-in anti cavitation valve, either left hand (L) or right hand (R) rotation must be specified when ordering the motor.


When the pump flow to the motor is shut off and the motor is operating at very high speeds, it is important that sufficient return port back pressure is available (port B in the schematic to the right).

The anti cavitation valve will then open and direct flow to the motor inlet port. If the inlet pressure is insufficient, motor cavitation will be experienced.


In an open circuit, back pressure can be created by a counter pressure valve installed in the return line; preferably, it should be pilot operated to minimize power losses. A back pressure of about 10 bar is sufficient in most applications.

For more drawings illustrating motors with make-up valve, see chapters 2, F11 and 3, F12.

For more info about integrated pressure relief valves, see page 61

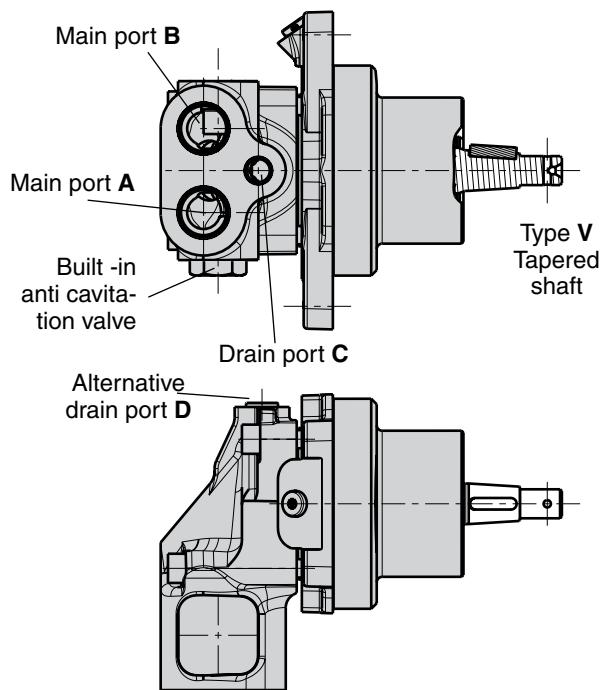

*Fan motor (F11-10 left hand rotated shown).*

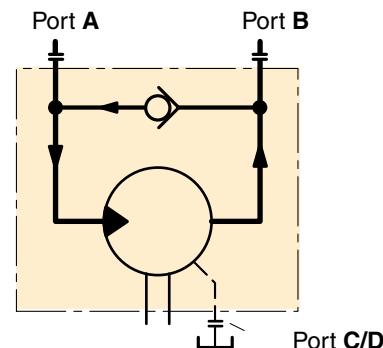

*Schematic Fan motor with anti cavitation valve*

## Example of ordering code

F11-010-MB-CV-K-000-**MUVL-00**

**MUVL** = Make up/anti cavitation valve, counter clockwise rotation

**MUVR** = Make up/anti cavitation valve, clockwise rotation

**F11/F12 in saw motor applications**


Series F11/F12 motors have proven suitable for demanding applications such as chain saws. Primarily due to the 40° bent-axis design, spherical pistons (with laminated piston rings) and gear synchronization, very high speeds are permissible. Not even low temperatures at start-up affect reliability.

Because of the built-in anti cavitation valve, either left hand (L) or right hand (R) rotation must be specified when ordering the motor.

When the pump flow to the motor is shut off and the motor is operating at very high speeds, it is important that sufficient return port back pressure is available.

The anti cavitation valve will then open and direct flow to the motor inlet port. If the inlet pressure is insufficient, motor cavitation will be experienced.

To further enhance the saw function and, at the same time, reduce weight, cost and installation dimensions, a specific saw motor has been developed (frame sizes F11-6, -10, -12, -14, -19 and F12-30; refer to the illustration to the right) which is specifically dedicated to bar saws. The motor allows the saw bar bearings to be mounted directly on the motor housing, and the sprocket installs on the motor shaft without additional bearings.

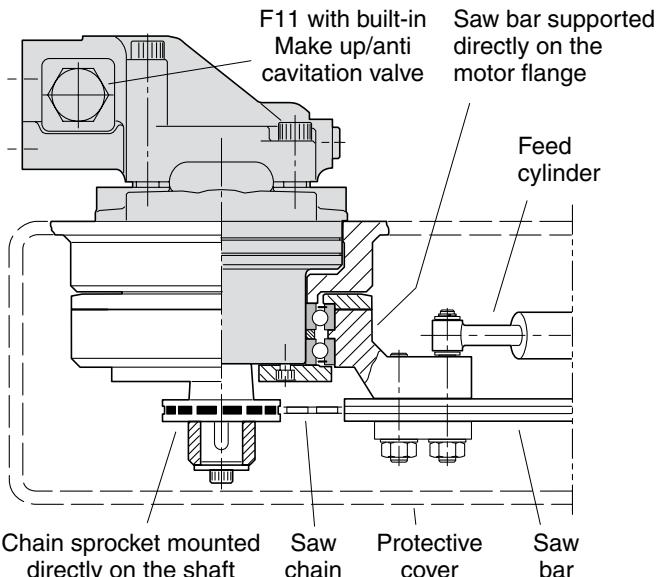

*Chain saw installation (example; F11-10 shown)*

**Parker Power Boost**

A high speed F11 or F12 motor could be optimized with a Power Boost™, which means less fluid friction and oil compression. This can reduce power losses by up to 5 kW. The improved efficiency generates less heat, reducing the need for cooling and consequently improves fuel consumption.

Parker Power Boost is available for size F11-6, -10, -12, -14, -19 and F12-30.

When to order a motor with Power Boost it is to be specified with a B in last field in model code. Ex below.

F11-019-SB-CS-K-000-MUVL-B0




**F11**

| <b>Content</b>                                      | <b>Page</b> |
|---|-------------|
| F11 cross section .....                             | 9           |
| Specifications .....                                | 9           |
| Efficiency .....                                    | 10          |
| Noise level .....                                   | 10          |
| Selfpriming speed and required inlet pressure ..... | 11          |
| Ordering codes                                      |             |
| F11-CETOP .....                                     | 12          |
| F11-ISO .....                                       | 13          |
| F11-SAE .....                                       | 14          |
| Installation dimensions-CETOP                       |             |
| F11-005 .....                                       | 15          |
| F11-006, -010 .....                                 | 16          |
| F11-012 .....                                       | 18          |
| F11-014 .....                                       | 20          |
| F11-019 .....                                       | 22          |
| Installation dimensions-ISO                         |             |
| F11-006, -010 .....                                 | 24          |
| F11-012 .....                                       | 26          |
| F11-014 .....                                       | 28          |
| Installation dimensions-SAE                         |             |
| F11-006, -010 .....                                 | 30          |
| F11-012 .....                                       | 32          |
| F11-014 .....                                       | 34          |
| F11-019 .....                                       | 36          |

**F11 cross section**

1. Barrel housing
2. Valve plate
3. Cylinder barrel
4. Guide spacer with O-rings
5. Timing gear
6. Roller bearing
7. Bearing housing
8. Shaft seal
9. Output/input shaft
10. Piston with laminated piston ring

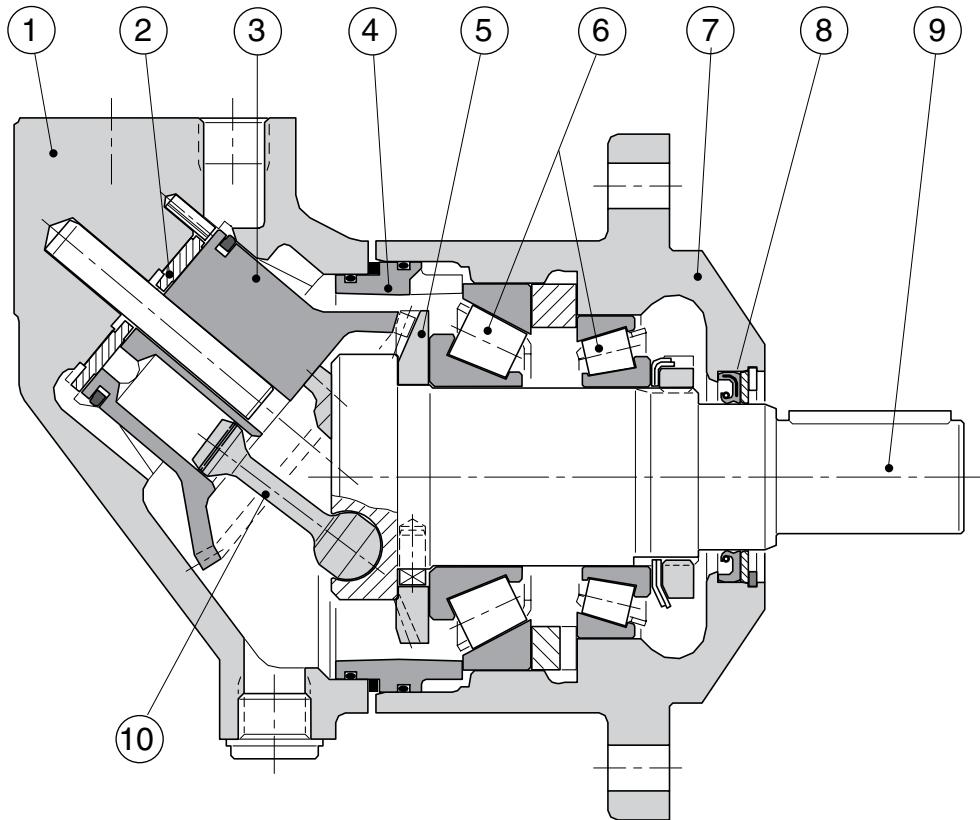

2

| Frame size F11                                  | -005   | -006   | -010   | -012   | -014  | -019  |
|---|--------|--------|--------|--------|-------|-------|
| <b>Displacement [cm<sup>3</sup>/rev]</b>        | 4.9    | 6.0    | 9.8    | 12.5   | 14.3  | 19.0  |
| <b>Operating pressure</b>                       |        |        |        |        |       |       |
| max intermittent <sup>1)</sup> [bar]            | 420    | 420    | 420    | 420    | 420   | 420   |
| max continuous [bar]                            | 350    | 350    | 350    | 350    | 350   | 350   |
| <b>Motor operating speed [rpm]</b>              |        |        |        |        |       |       |
| max intermittent <sup>1)</sup>                  | 14 000 | 11 200 | 11 200 | 10 300 | 9 900 | 8 900 |
| max continuous <sup>3)</sup>                    | 12 800 | 10 200 | 10 200 | 9 400  | 9 000 | 8 100 |
| min continuous                                  | 50     | 50     | 50     | 50     | 50    | 50    |
| <b>Max pump selfpriming speed<sup>2)</sup></b>  |        |        |        |        |       |       |
| L or R function; max [rpm]                      | 4 600  | —      | 4 200  | 3 900  | 3 900 | 3 500 |
| <b>Motor input flow</b>                         |        |        |        |        |       |       |
| max intermittent <sup>1)</sup> [l/min]          | 69     | 67     | 110    | 129    | 142   | 169   |
| max continuous [l/min]                          | 63     | 61     | 100    | 118    | 129   | 154   |
| <b>Drain temperature<sup>3)</sup>, max [°C]</b> | 115    | 115    | 115    | 115    | 115   | 115   |
| min [°C]  | -40    | -40    | -40    | -40    | -40   | -40   |
| <b>Theoretical torque at 100 bar [Nm]</b>       | 7.8    | 9.5    | 15.6   | 19.8   | 22.7  | 30.2  |
| <b>Mass moment of inertia</b>                   |        |        |        |        |       |       |
| (x10 <sup>-3</sup> ) [kg m <sup>2</sup> ]       | 0.16   | 0.39   | 0.39   | 0.40   | 0.42  | 1.1   |
| <b>Weight [kg]</b>                              | 4.7    | 7.5    | 7.5    | 8.2    | 8.3   | 11    |

1) Intermittent: max 6 seconds in any one minute.

2) Selfpriming speed valid at sea level. Find more info on page 11

3) See also installation information. Page 67

## Efficiency


Because of its high overall efficiency, driving a motor/pump from series F11 requires less fuel or electric power. Also, it allows the use of a small reservoir and heat exchanger, which in turn reduce cost, weight, and installation size.

The diagrams to the right show volumetric and mechanical efficiencies of an F11-5 motor.


F11-19 motors can be equipped with Power Boost which in high speed applications can decrease the mechanical losses by up to 15%, see page 7.

Contact Parker Hannifin for efficiency information on a particular F11 frame size that is being considered.

Volumetric efficiencies

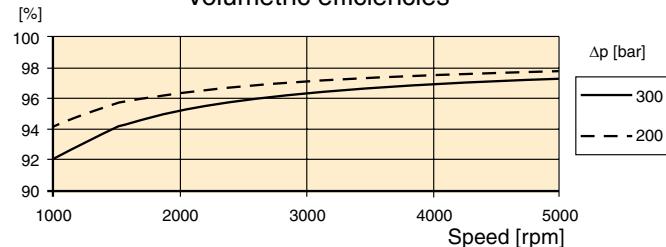

Mechanical efficiencies

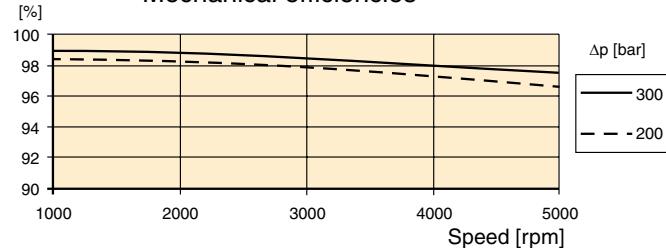

## Noise level


Series F11 feature low noise levels from low to high speeds and pressures.

The noise level is measured in a semi-anechoic room, 1 m behind the unit. As an example, the diagram to the right shows the noise level of an F11-005.

The noise level for a particular motor/pump may vary  $\pm 2$  dB(A) compared to what is shown in the diagram.

**NOTE:** Noise information for F11/F12 frame sizes are available from Parker Hannifin.

Noise level  
 [dB(A)]

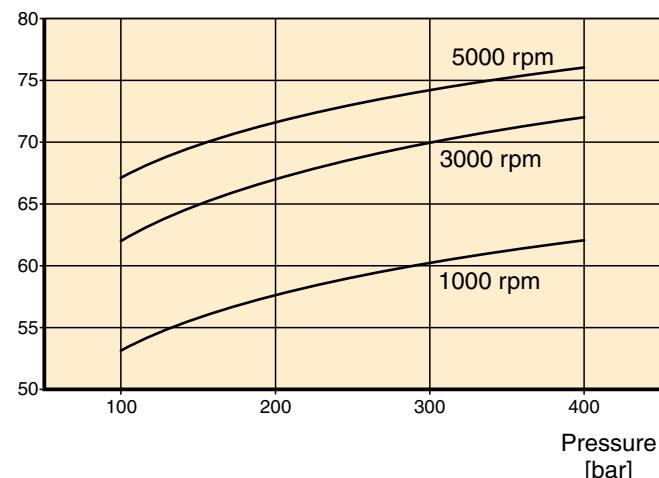


## **Selfpriming speed and required inlet pressure**

### **Series F11**

In pump applications, the F11 with function **L** (counter clockwise rotation) or **R** (clockwise rotation) is normally used. The **L** and **R** (pump) provide the highest self priming speeds (see table) as well as the lowest noise level. The **M** and **H** (motor) function can also be used as a pump, in either direction, but at a lower self priming speed.

Operating above the self priming speed (refer to Diagram 1) requires increased inlet pressure. As an example, at least 1.0 bar is needed when operating the F11-19-M as a pump at 3500 rpm. An F11 used as a motor (e.g. in a hydrostatic transmission), may sometimes operate as a pump at speeds above the selfpriming speed; this requires additional inlet pressure. Insufficient inlet pressure can cause pump cavitation resulting in greatly increased pump noise and deteriorating performance.

| Function | <b>L or R</b> | <b>M</b> | <b>H</b> |
|----------|---------------|----------|----------|
| F11-5    | 4600          | 3800     | 3200     |
| F11-6    |               | 3100     |          |
| F11-10   | 4200          | 3100     | 2700     |
| F11-12   | 3900          | -        | 3000     |
| F11-14   | 3900          | -        | 3000     |
| F11-19   | 3500          | 2400     | 2100     |



**2**

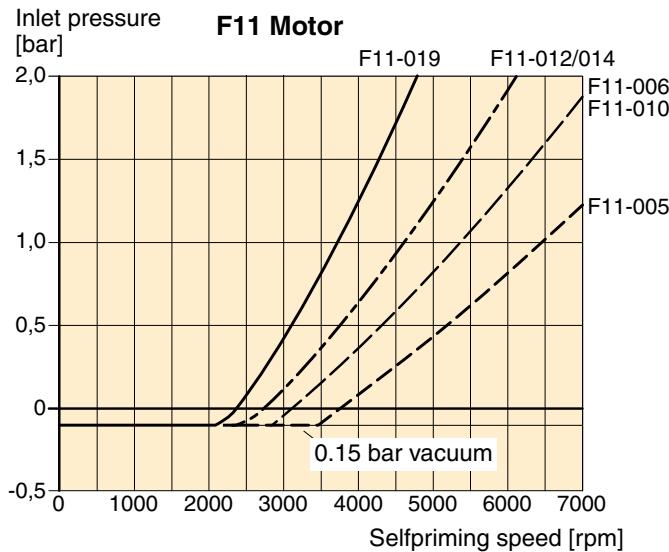


Diagram 1. Min required inlet pressure for Motor.


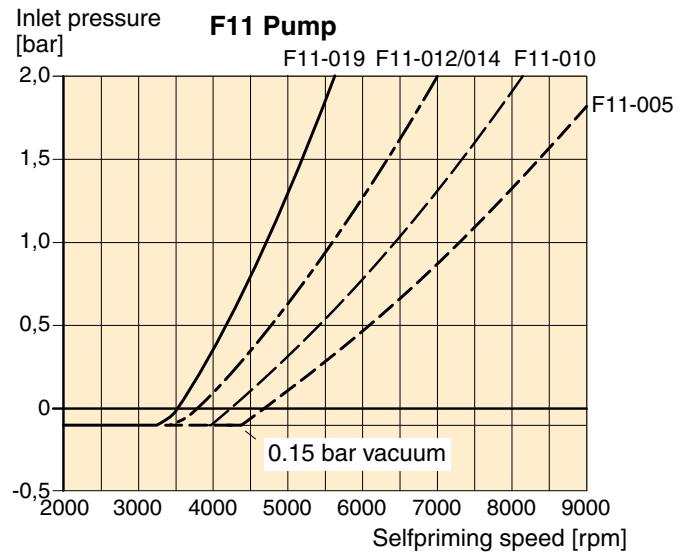


Diagram 2. Min required inlet pressure for Pump.


The inlet pressure can be charged by external pump, pressurized reservoir or using BLA Boost unit  
Find more info about the BLA unit at page 66.

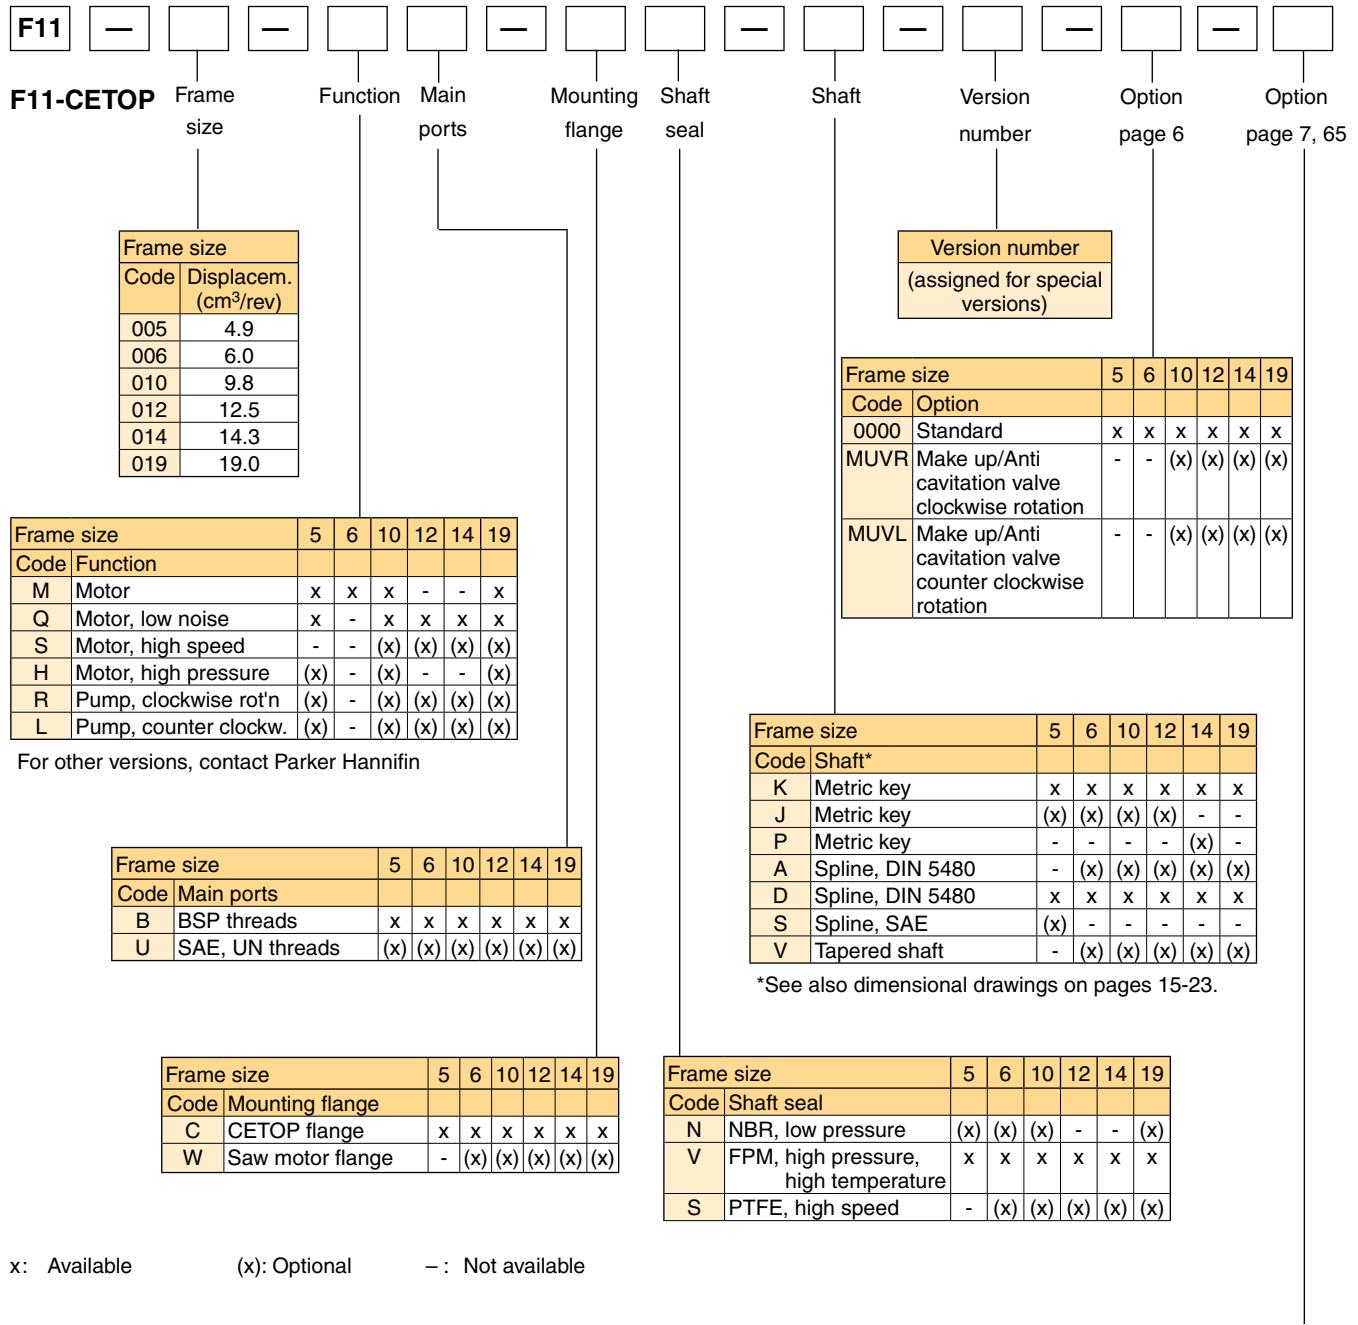

x: Available

(x): Optional

- : Not available

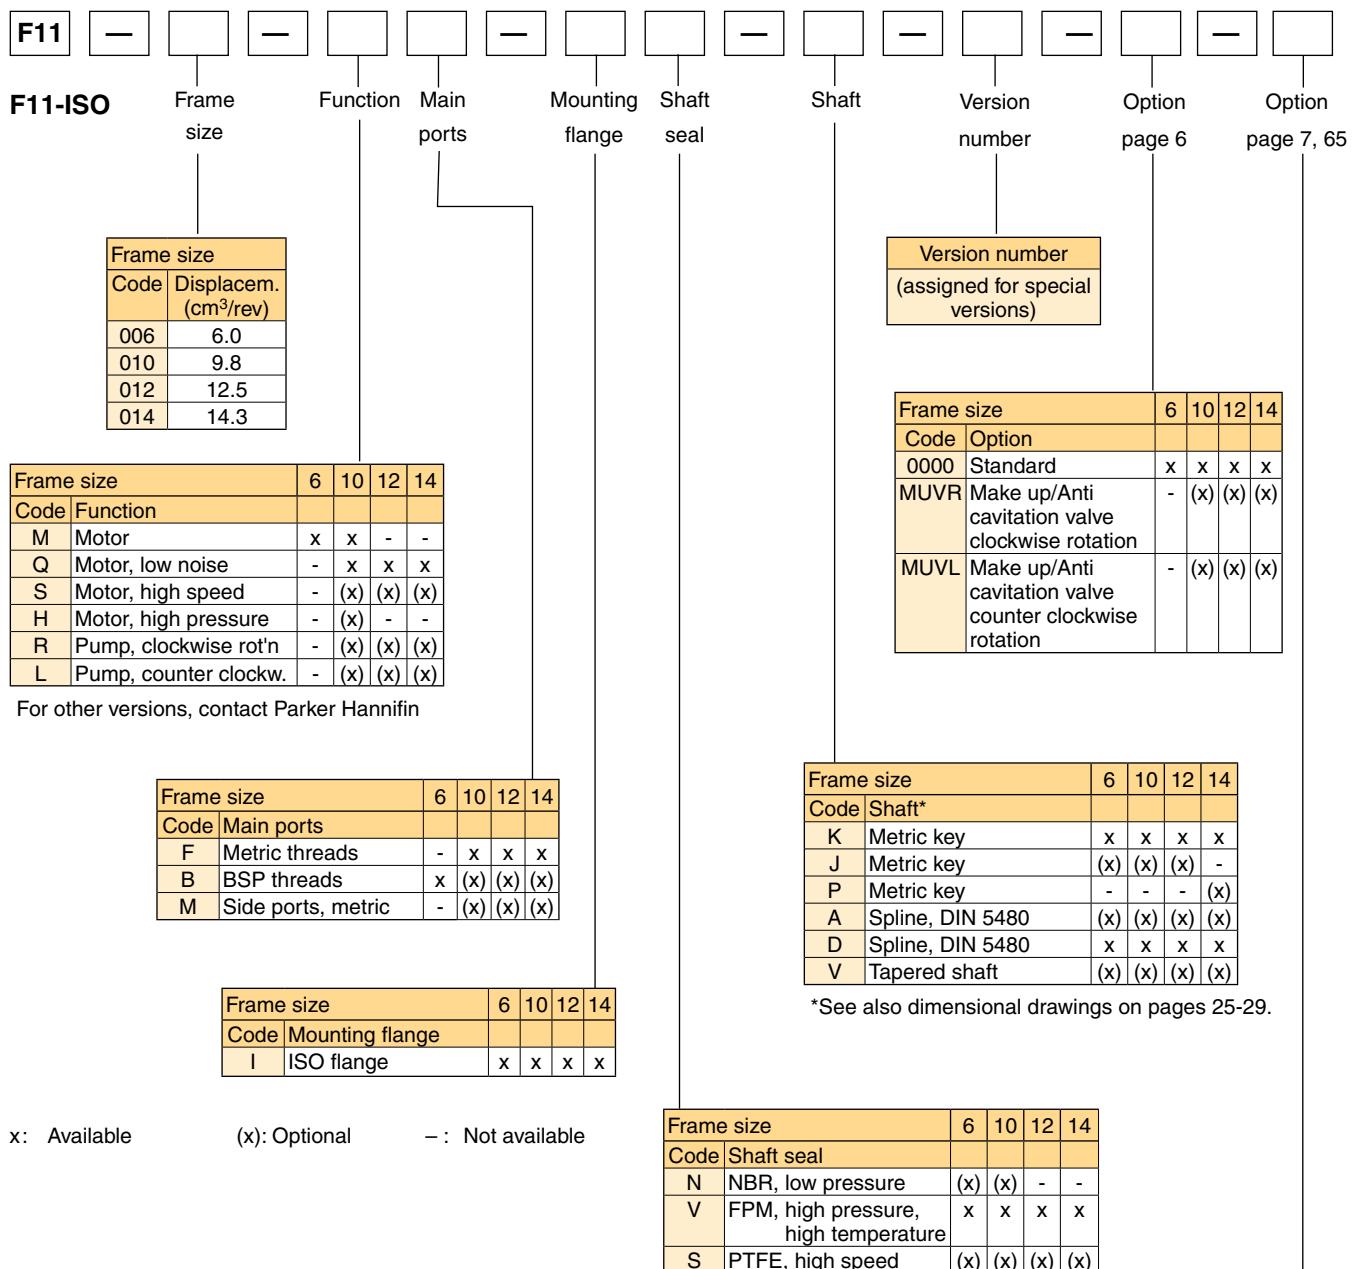

2


For other versions, contact Parker Hannifin

x: Available

(x): Optional

- : Not available

\*See also dimensional drawings on pages 25-29.

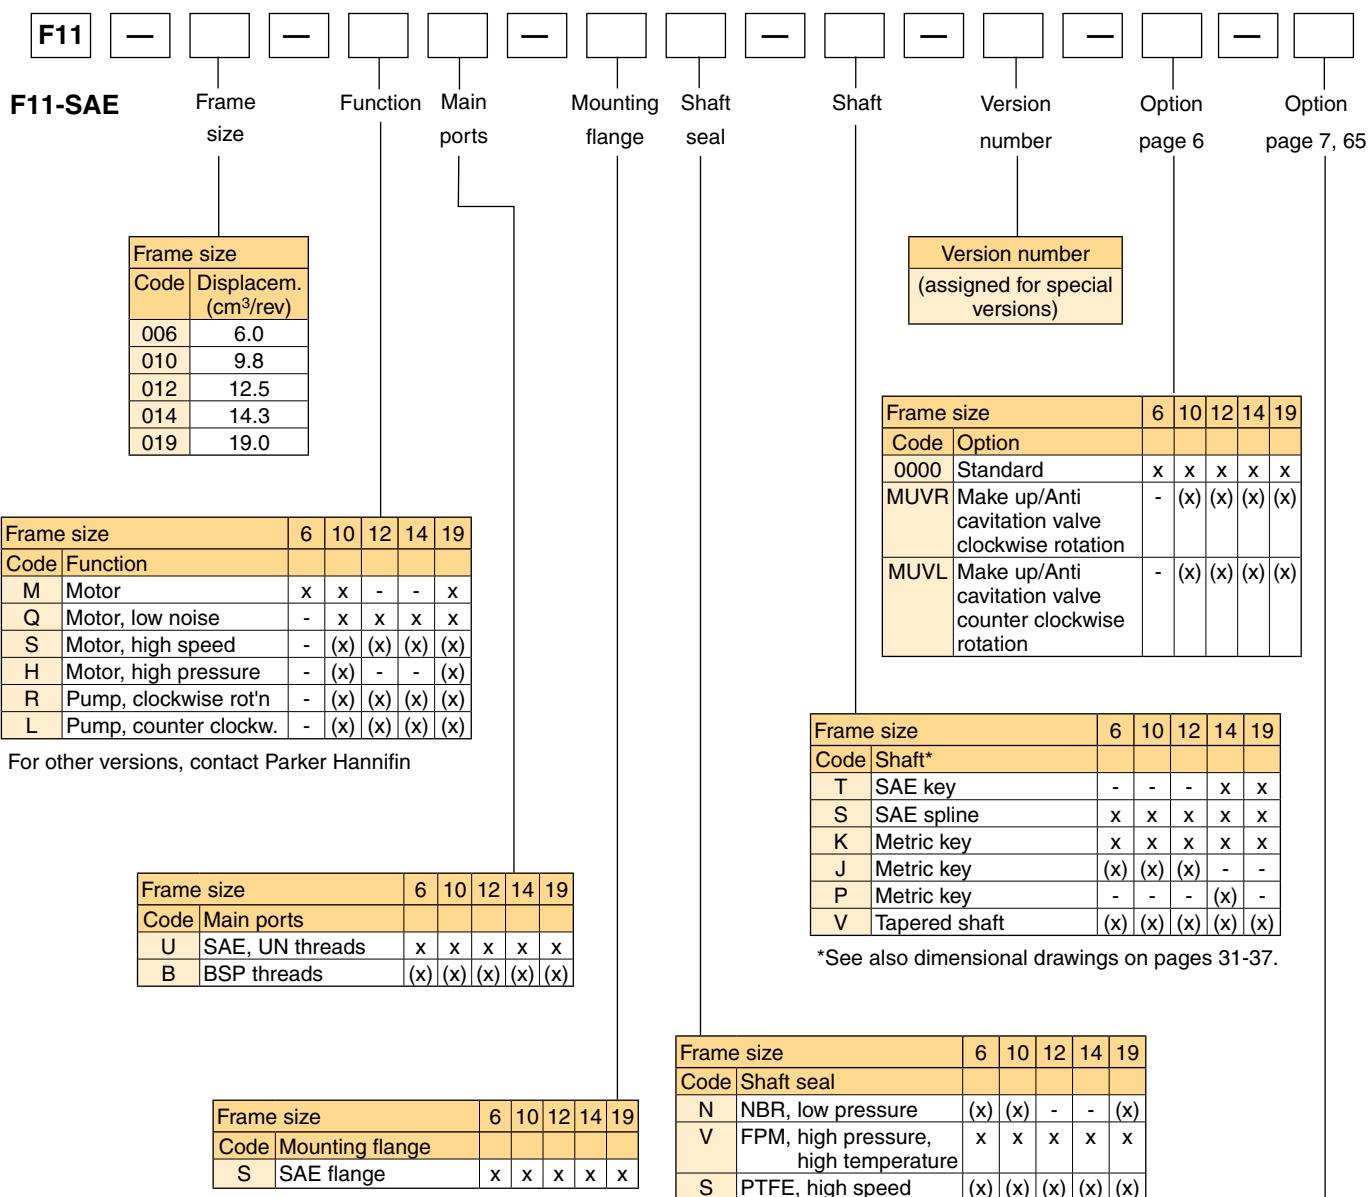

For other versions, contact Parker Hannifin

\*See also dimensional drawings on pages 31-37.


x: Available

(x): Optional

- : Not available


| Code | Option                                       | 6   | 10  | 12  | 14  | 19  |
|------|--|-----|-----|-----|-----|-----|
| 00   | Standard                                     | x   | x   | x   | x   | x   |
| P_   | Prepared for speed sensor                    | (x) | (x) | (x) | (x) | (x) |
| B_   | Power Boost and Prepared<br>for speed sensor | (x) | (x) | (x) | (x) | (x) |
| _T   | Painted Black                                | (x) | (x) | (x) | (x) | (x) |

**F11-005**  
(CETOP versions)

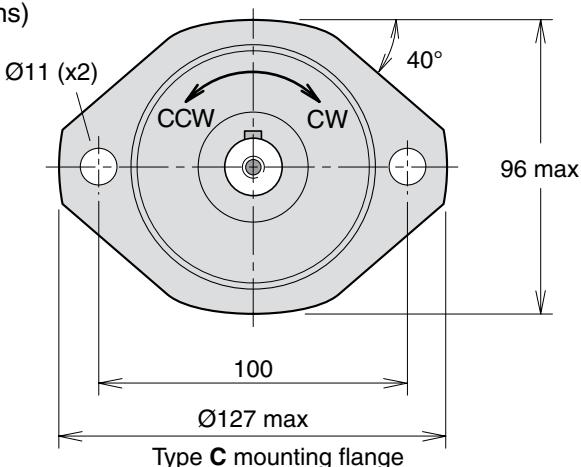




Main port **A**  
3/4"-16 UNF  
O-ring boss;  
SAE J514d

Main port **B**  
3/4"-16 UNF  
O-ring boss;  
SAE J514d

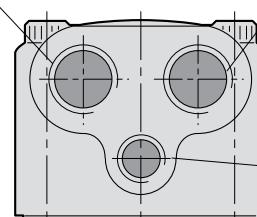


Drain port **C**  
9/16"-18 UNF  
O-ring boss;  
SAE J514d

**Main ports Code U**

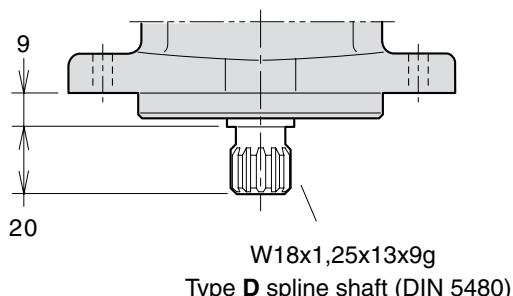
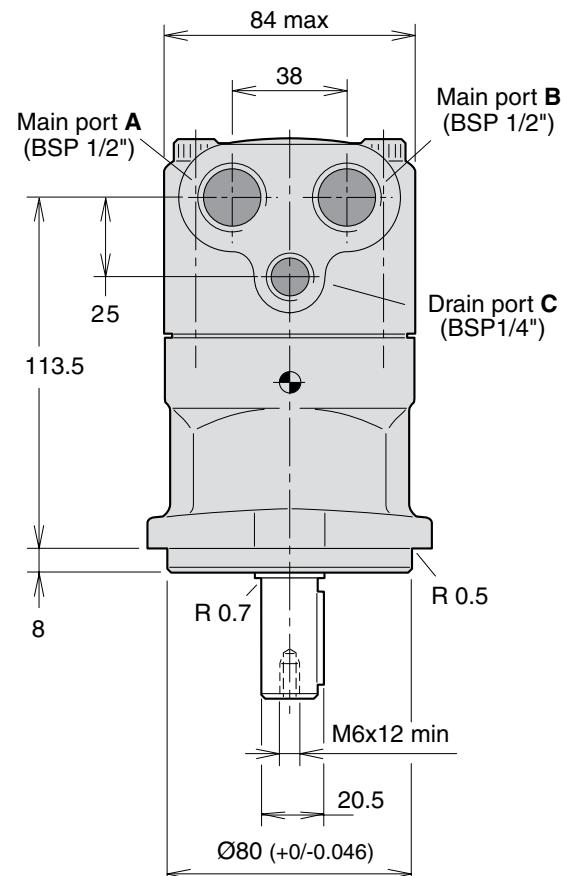
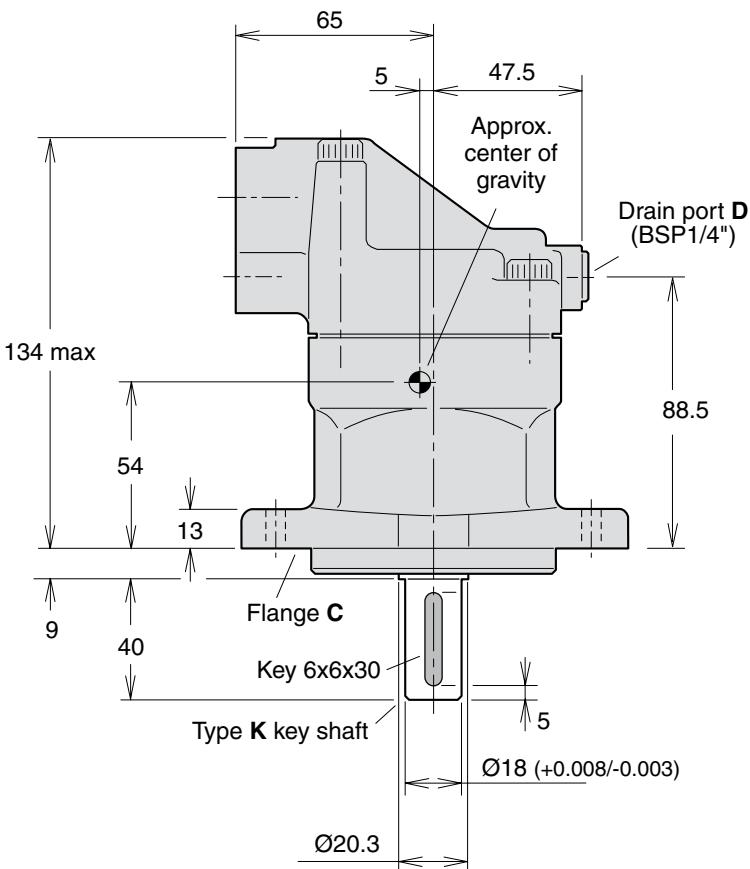


Type **D** spline shaft (DIN 5480)

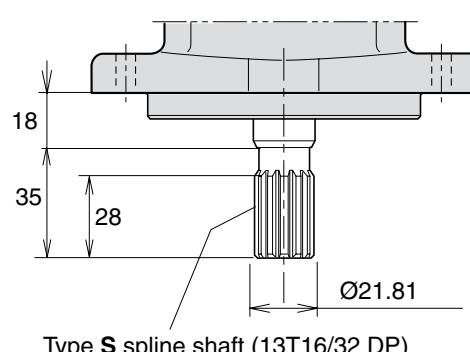

Type **S** spline shaft (13T16/32 DP)



**F11-006, -010**  
(CETOP versions)

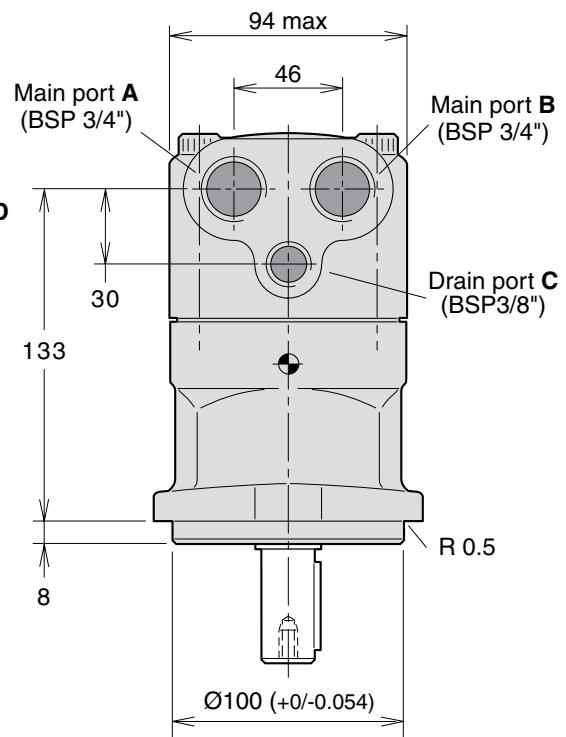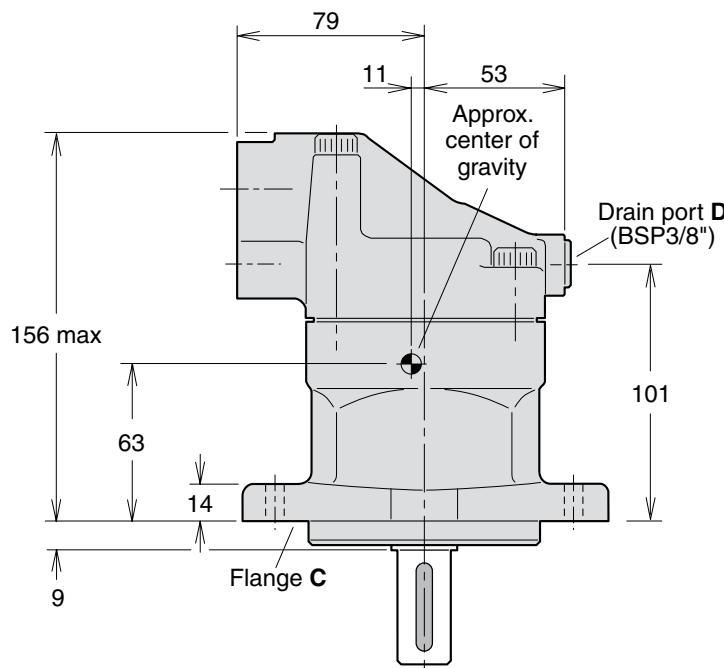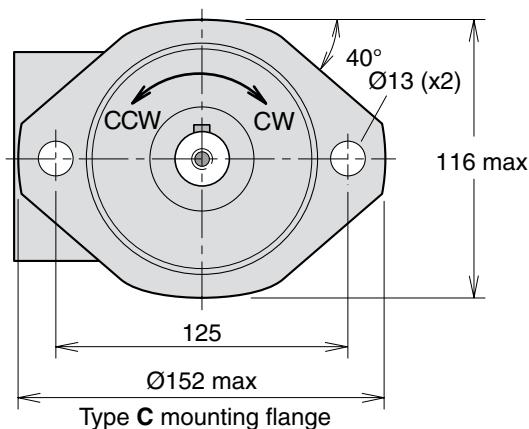






**F11-006, -010**

(CETOP versions)


Make up/Anti cavitation valve  
 (MUVL or MUVR optional;  
 clockwise rotation shown).

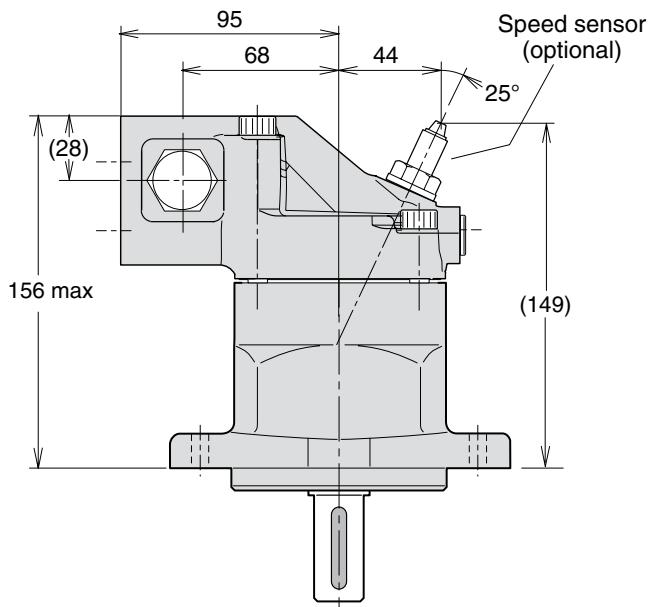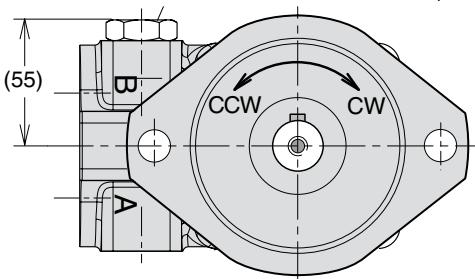

**Shaft options**

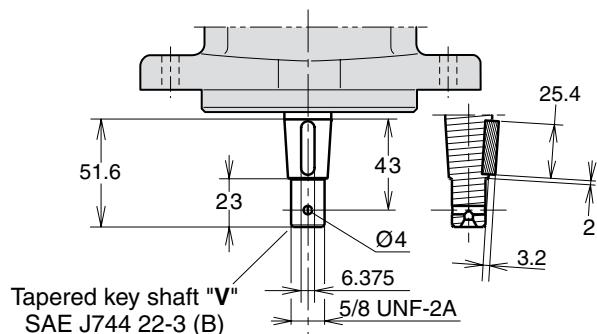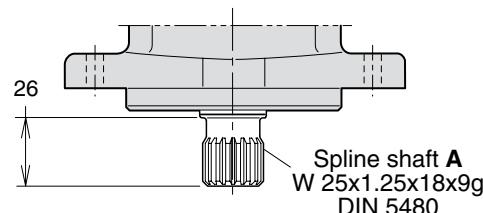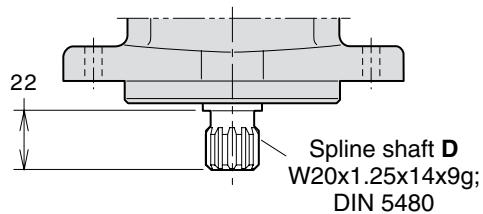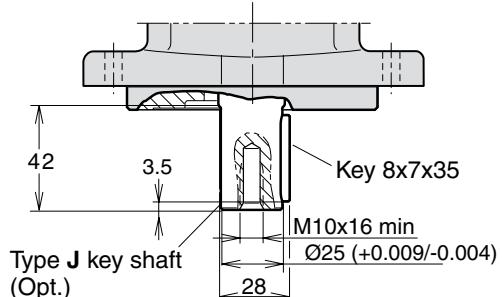
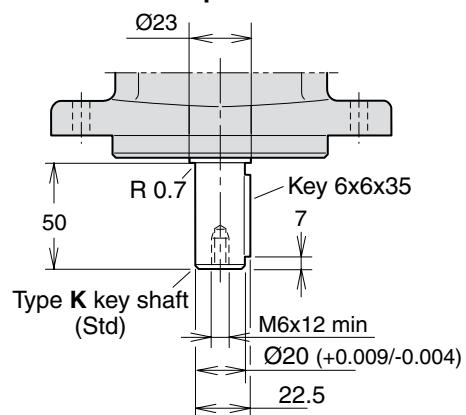


**F11-012**  
(CETOP versions)





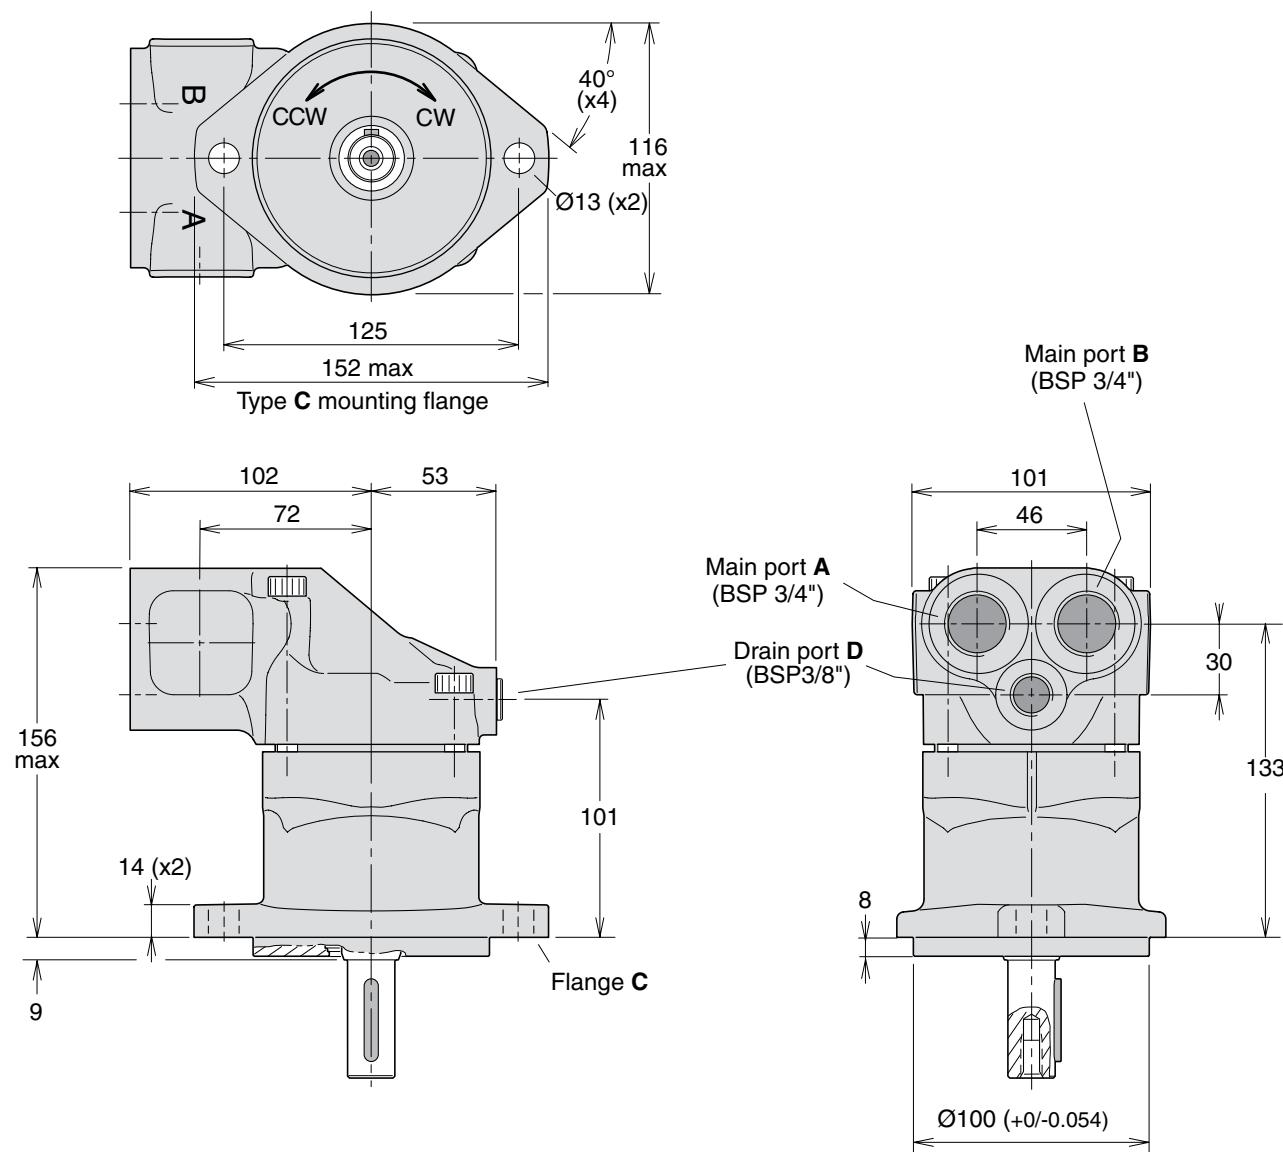


**F11-012**  
(CETOP versions)


Make up/Anti cavitation valve  
(MUVL or MUVR optional;  
clockwise rotation shown)

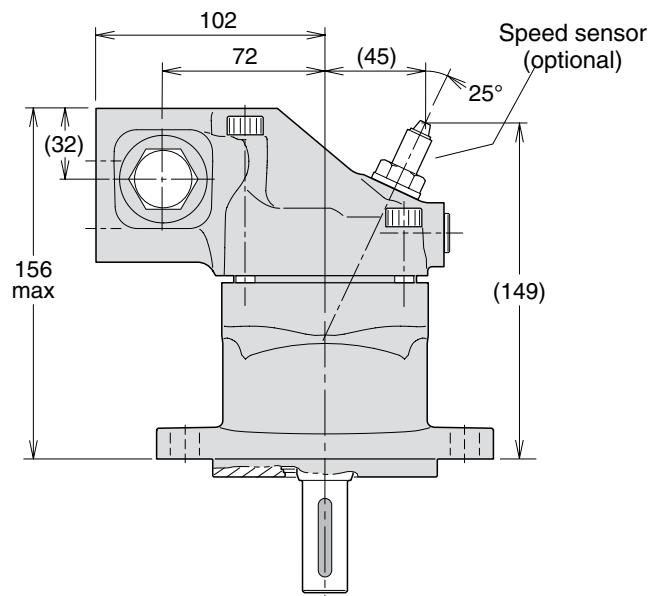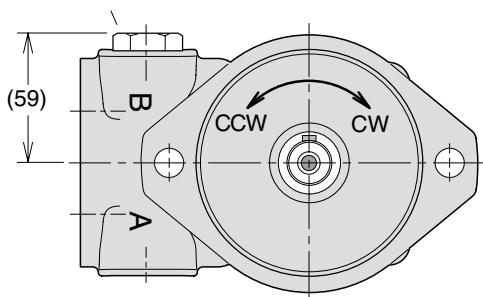



**Shaft options**

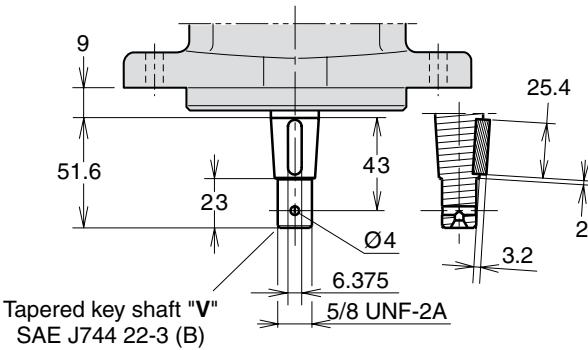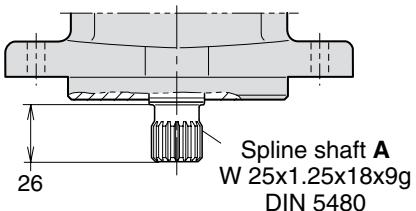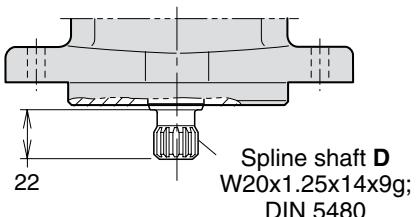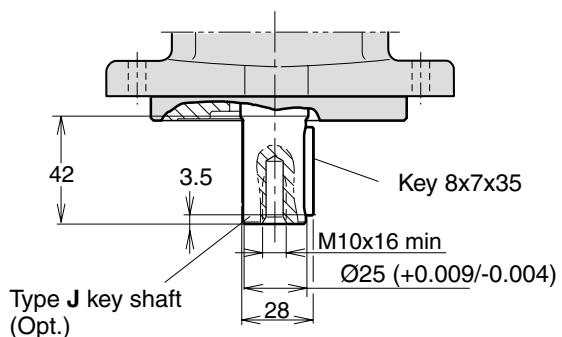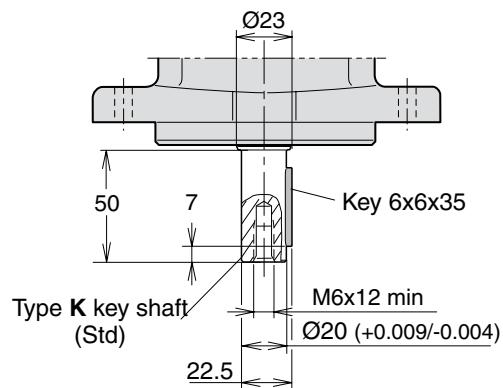


**F11-014**  
(CETOP versions)

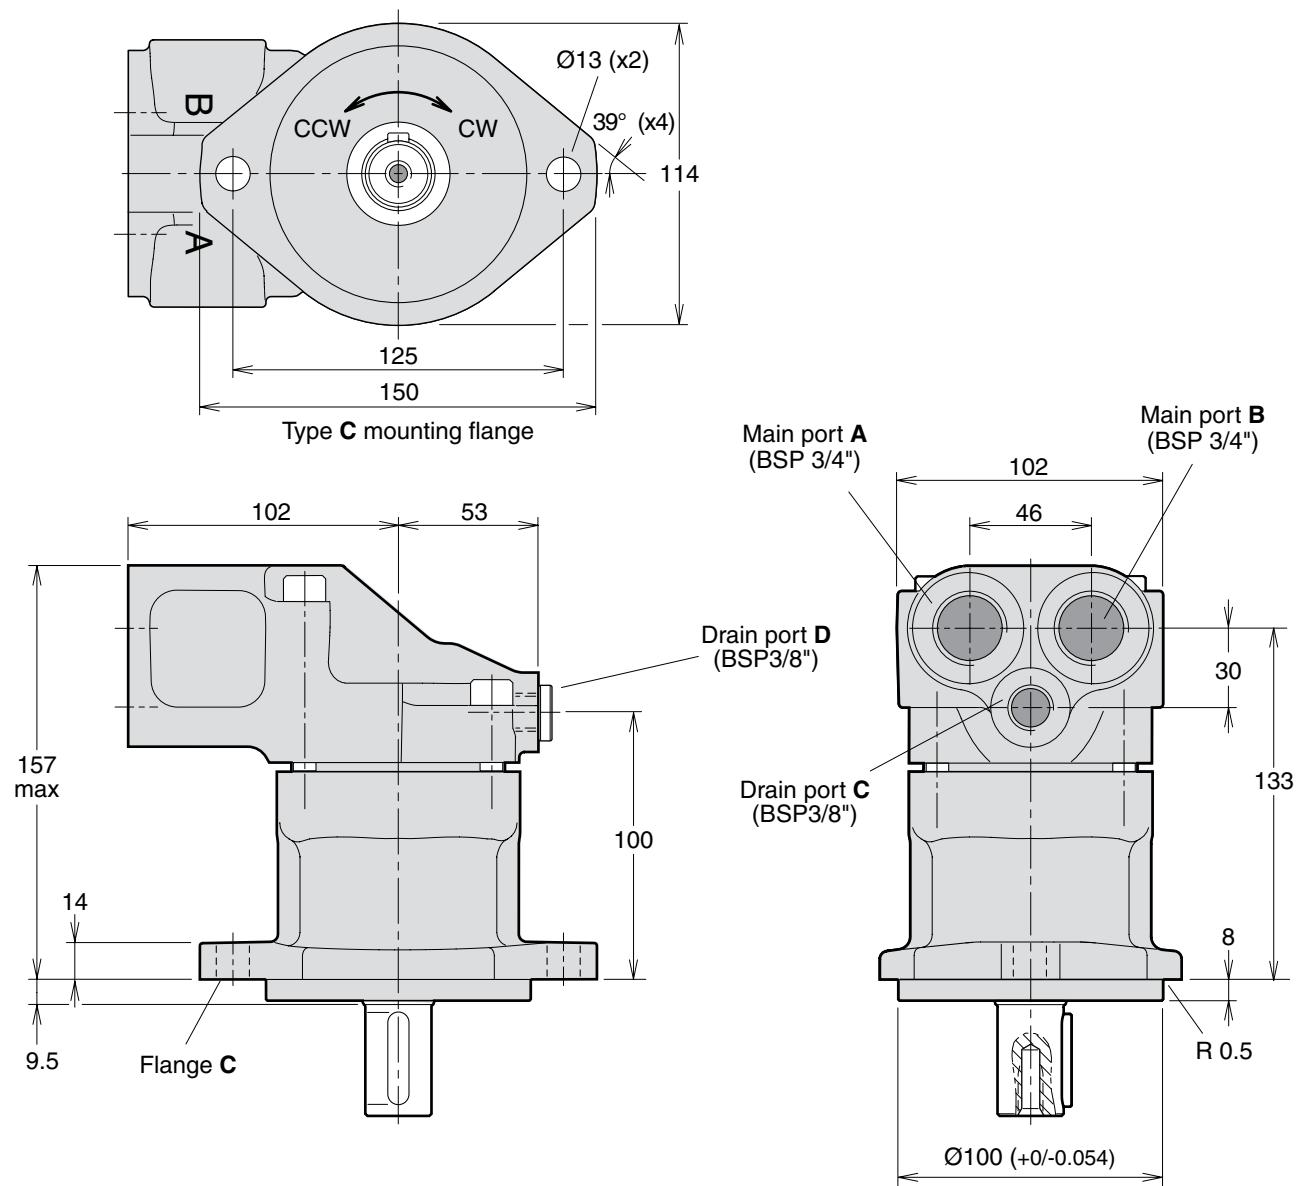


**F11-014**  
(CETOP versions)

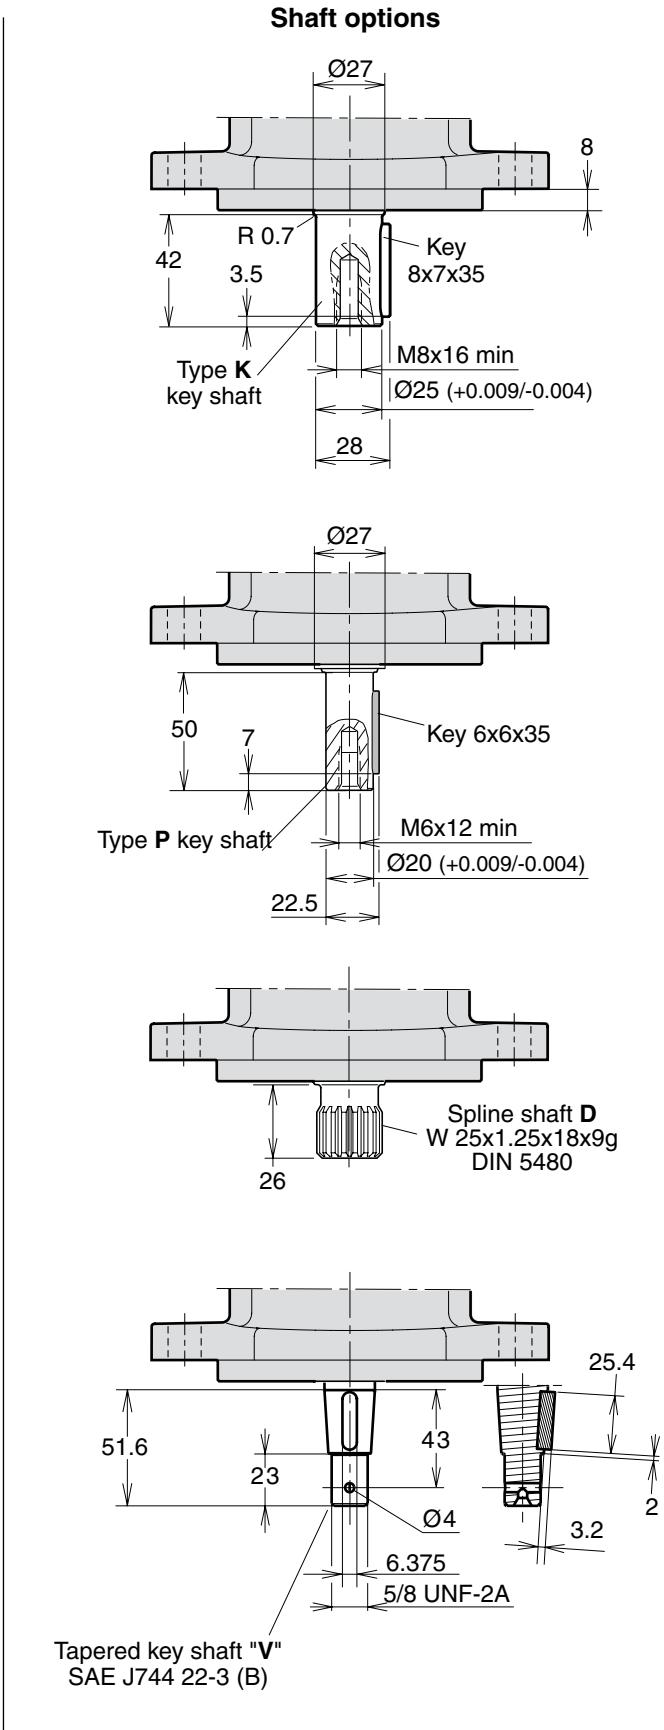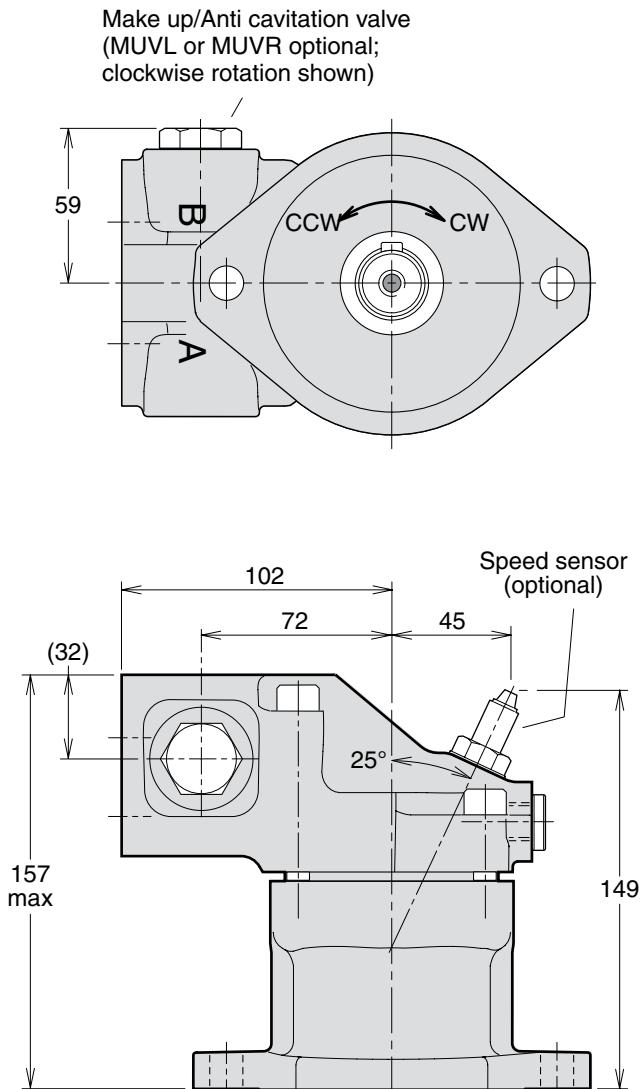




**F11-019**  
(CETOP version)

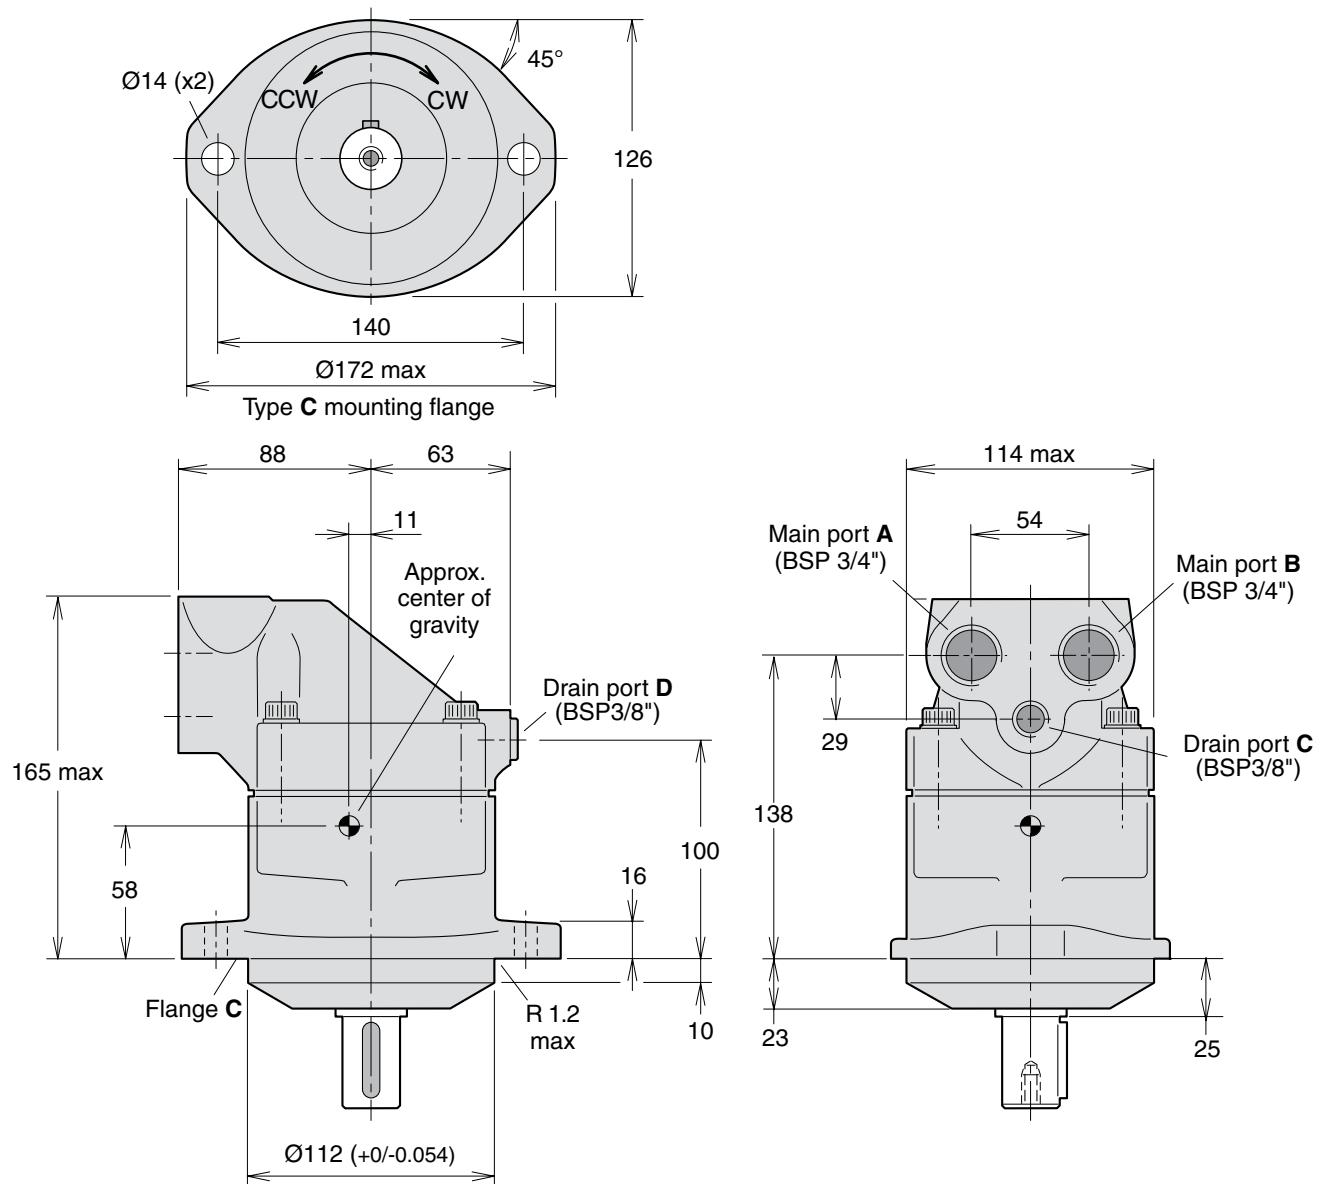


**F11-019**  
(CETOP version)

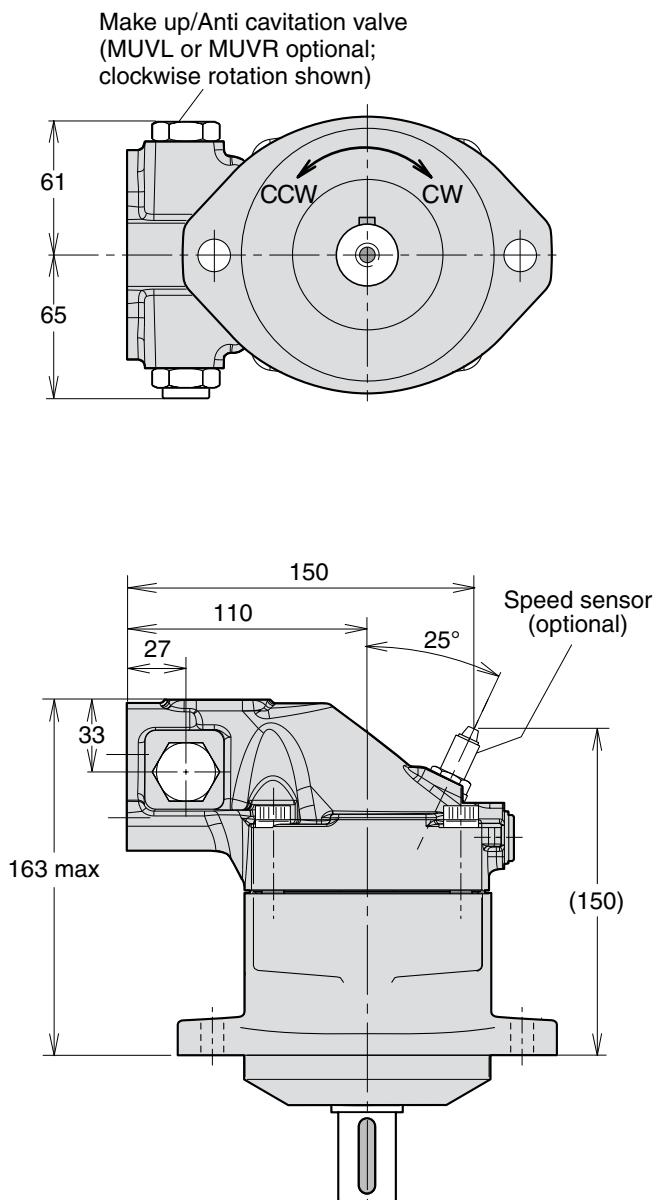

**Shaft options**

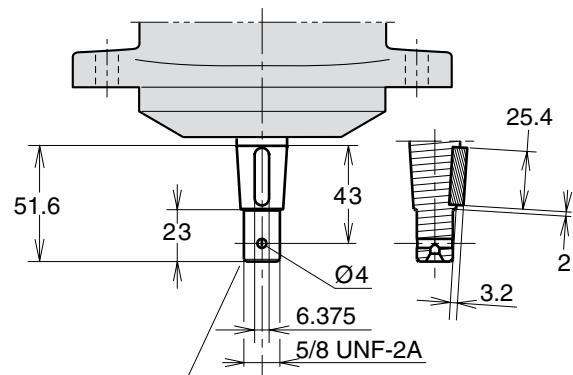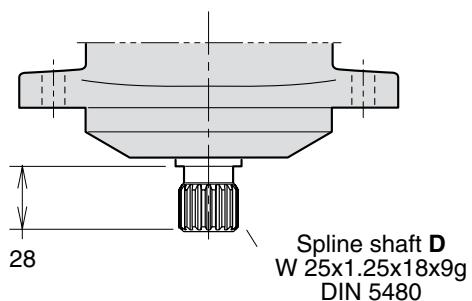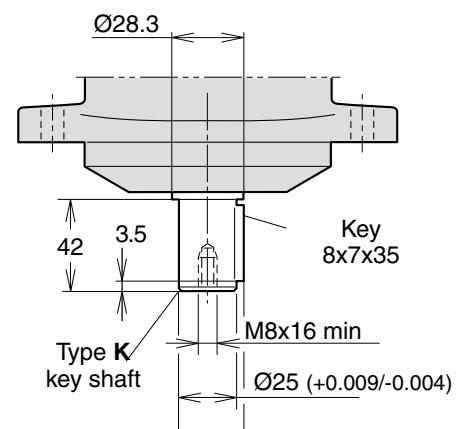


**F11-006, -010**  
(ISO versions)

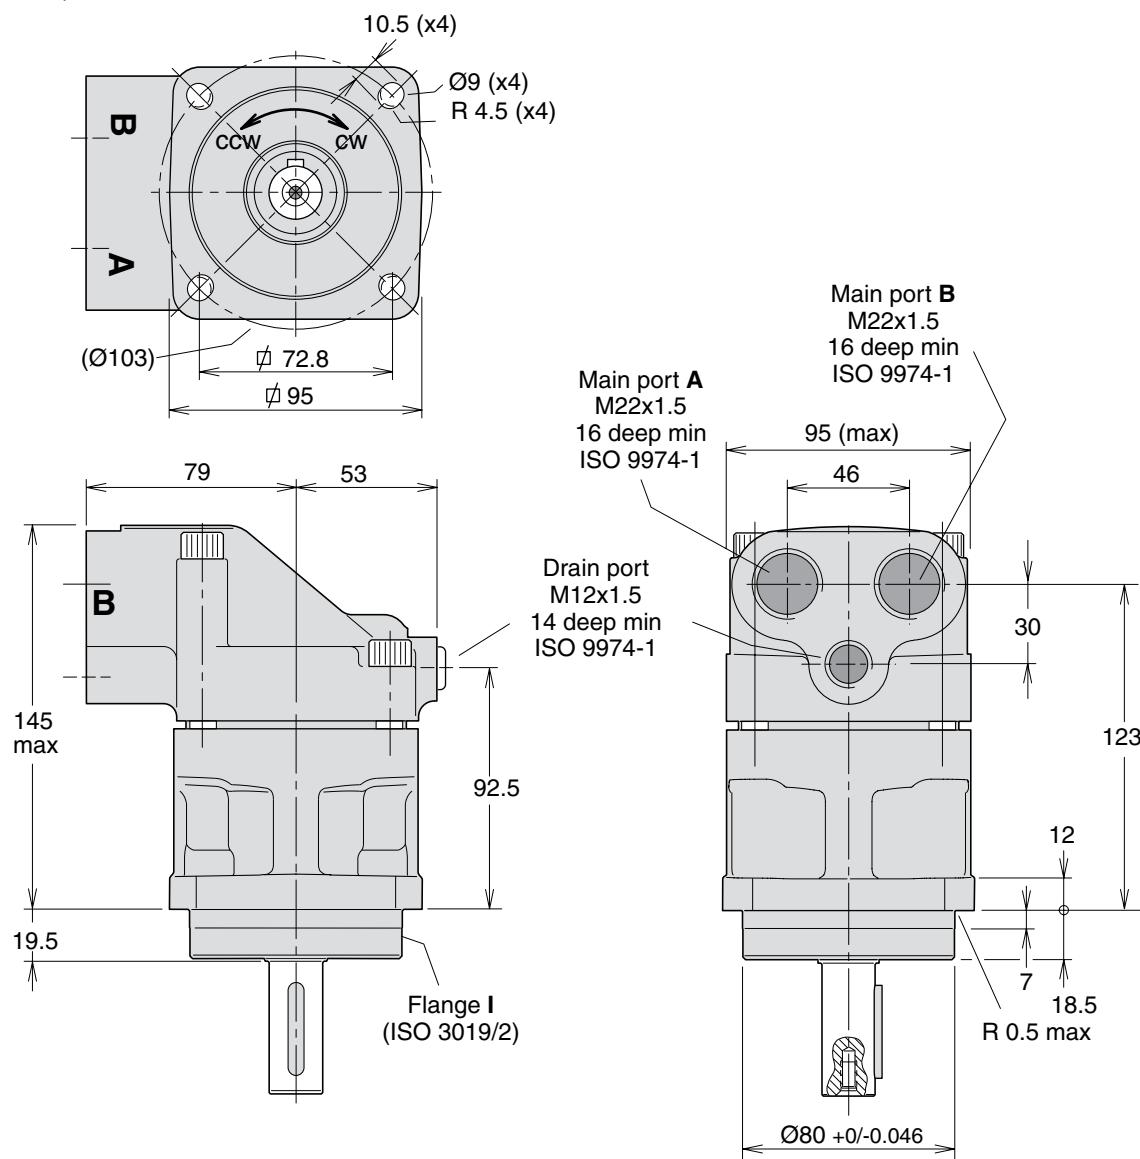






**F11-006, -010**

(ISO versions)


Make up/Anti cavitation valve  
(MUVL or MUVR optional;  
clockwise rotation shown)

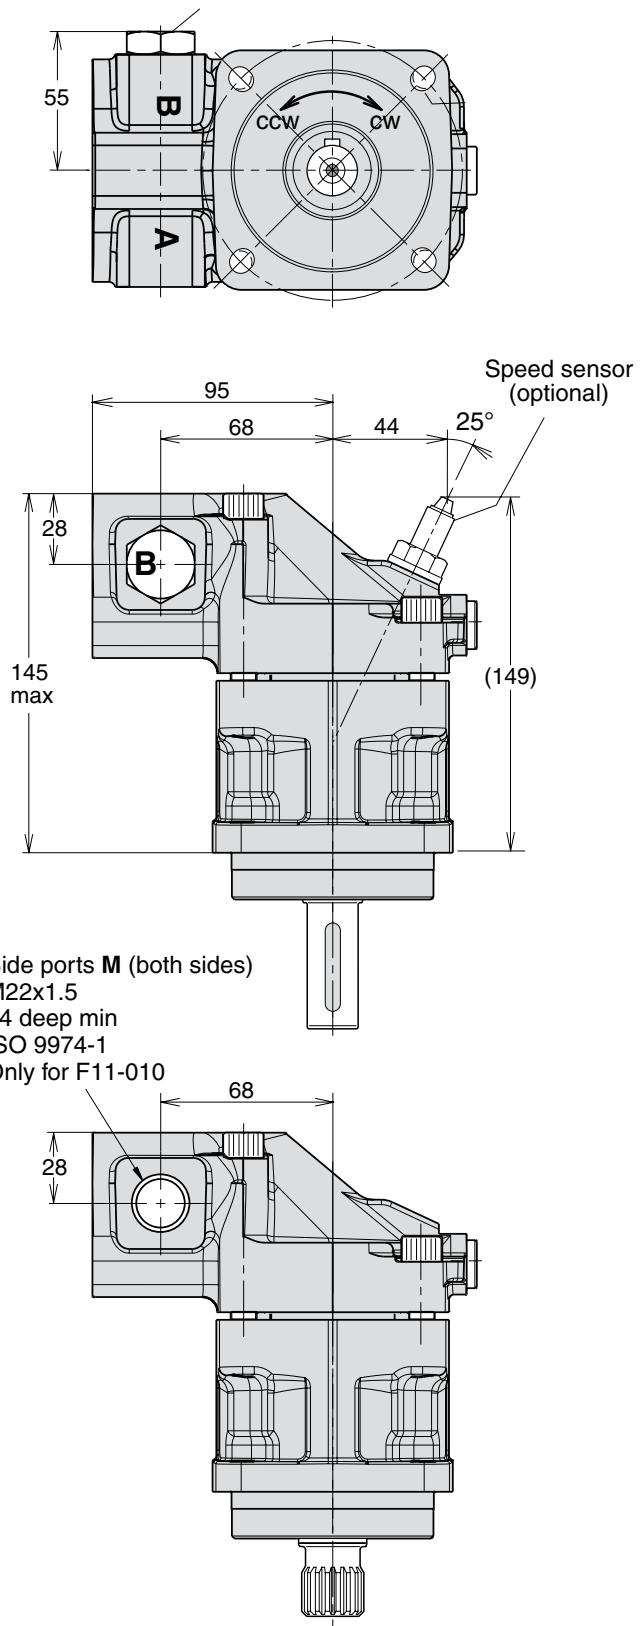

**Shaft options**

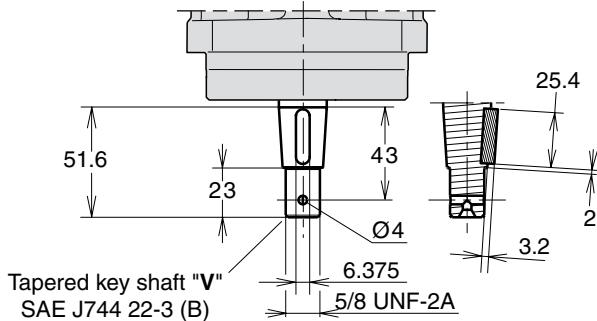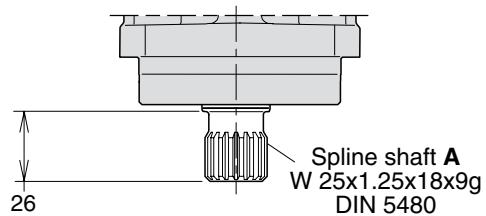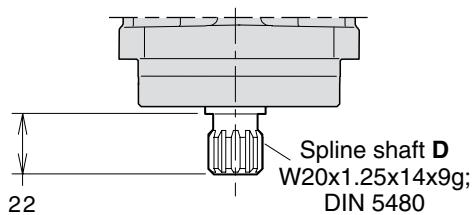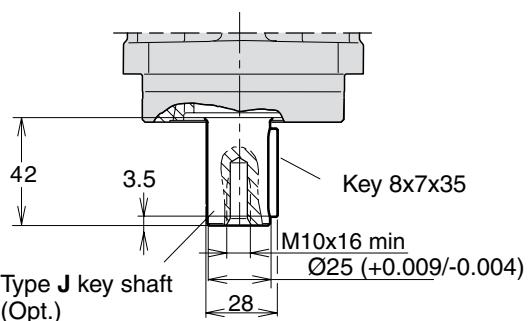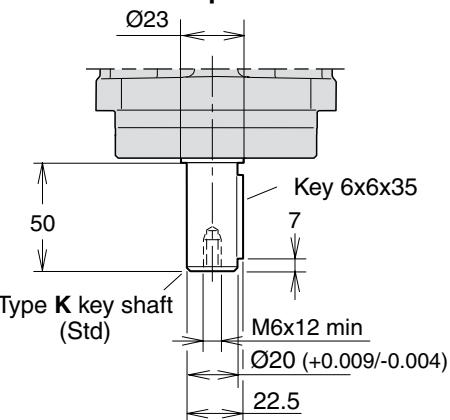


**F11-012**  
(ISO versions)

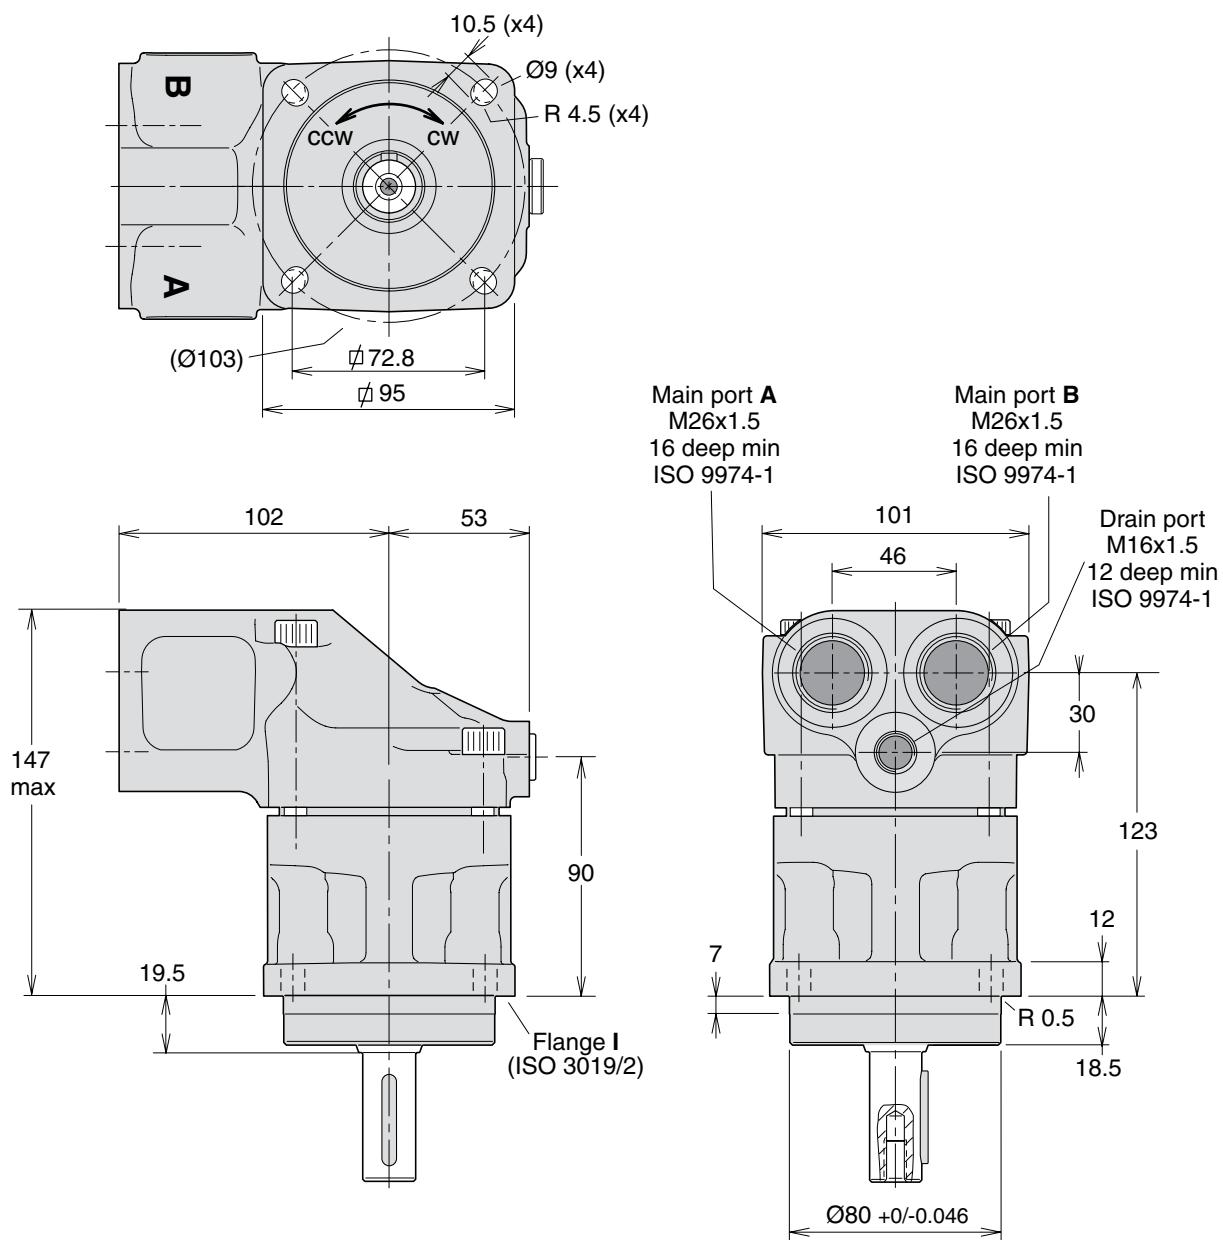


**F11-012**


(ISO versions)

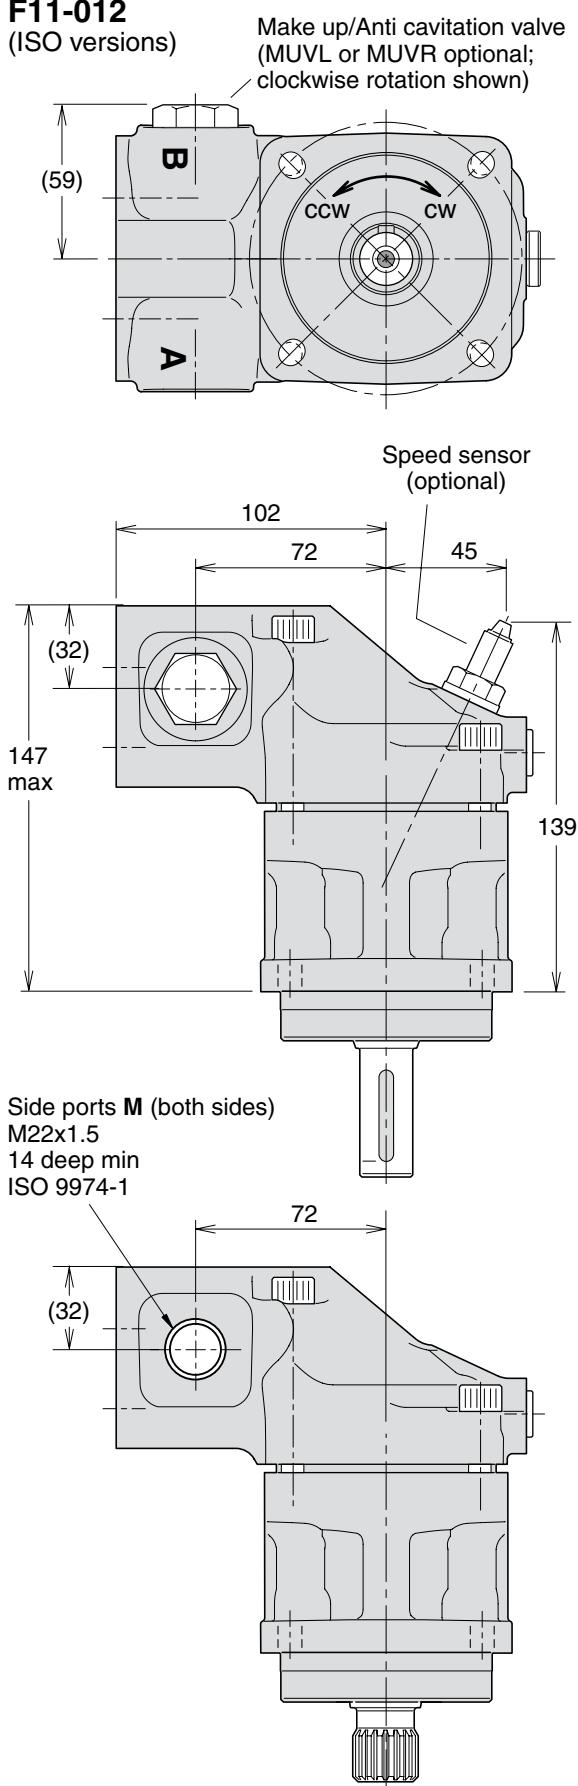



**Shaft options**

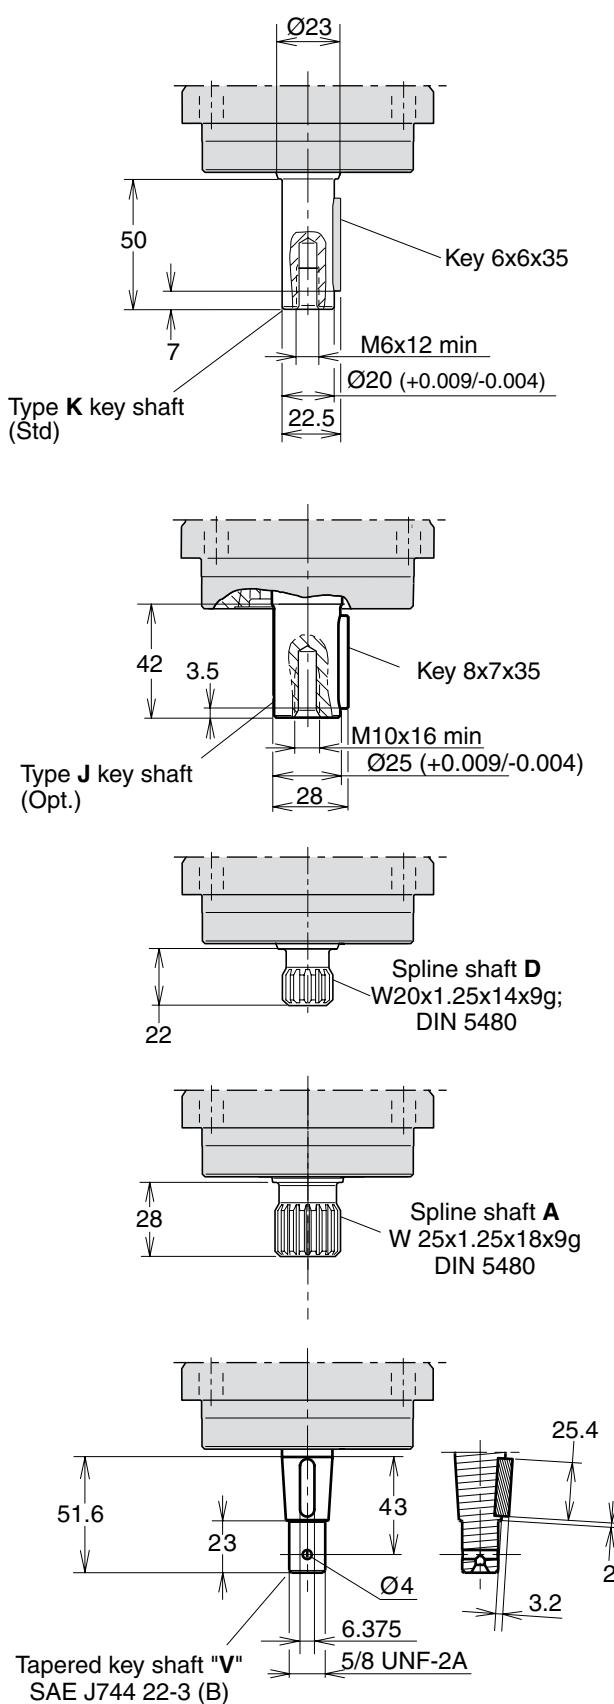

**F11-014**  
(ISO versions)


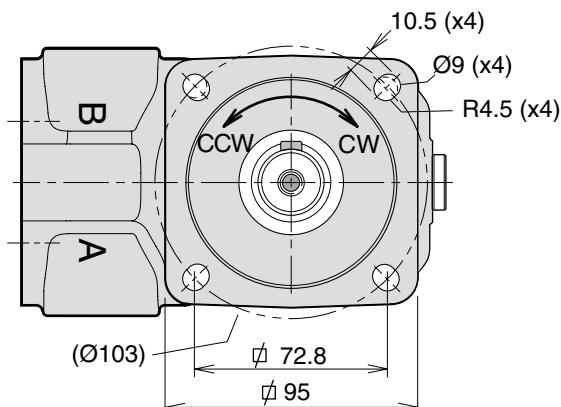


Type I mounting flange (ISO 3019/2)

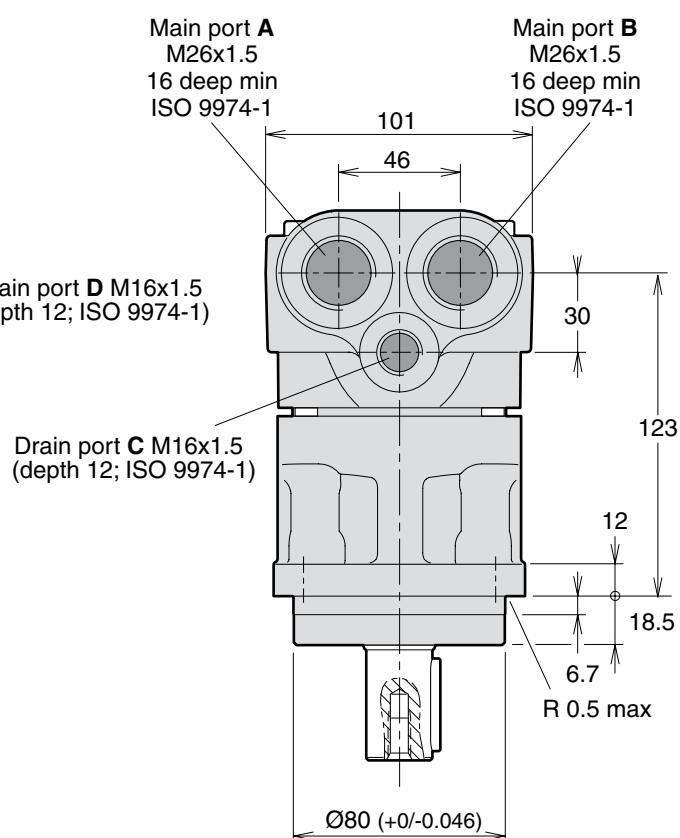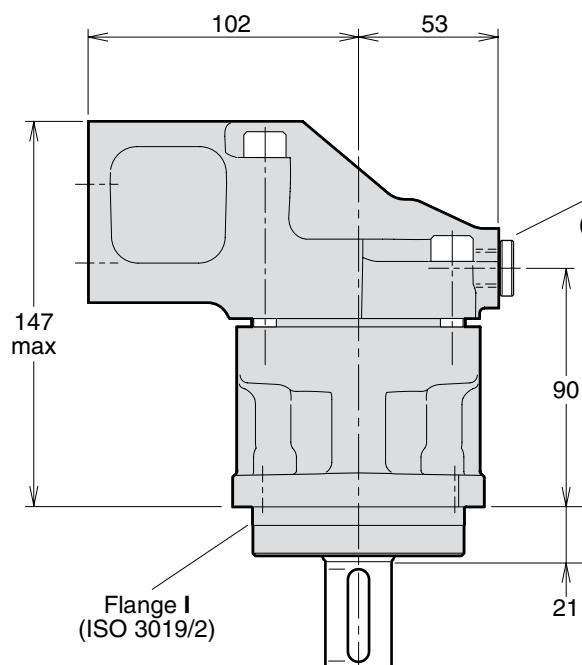


**F11-014**

(ISO versions)

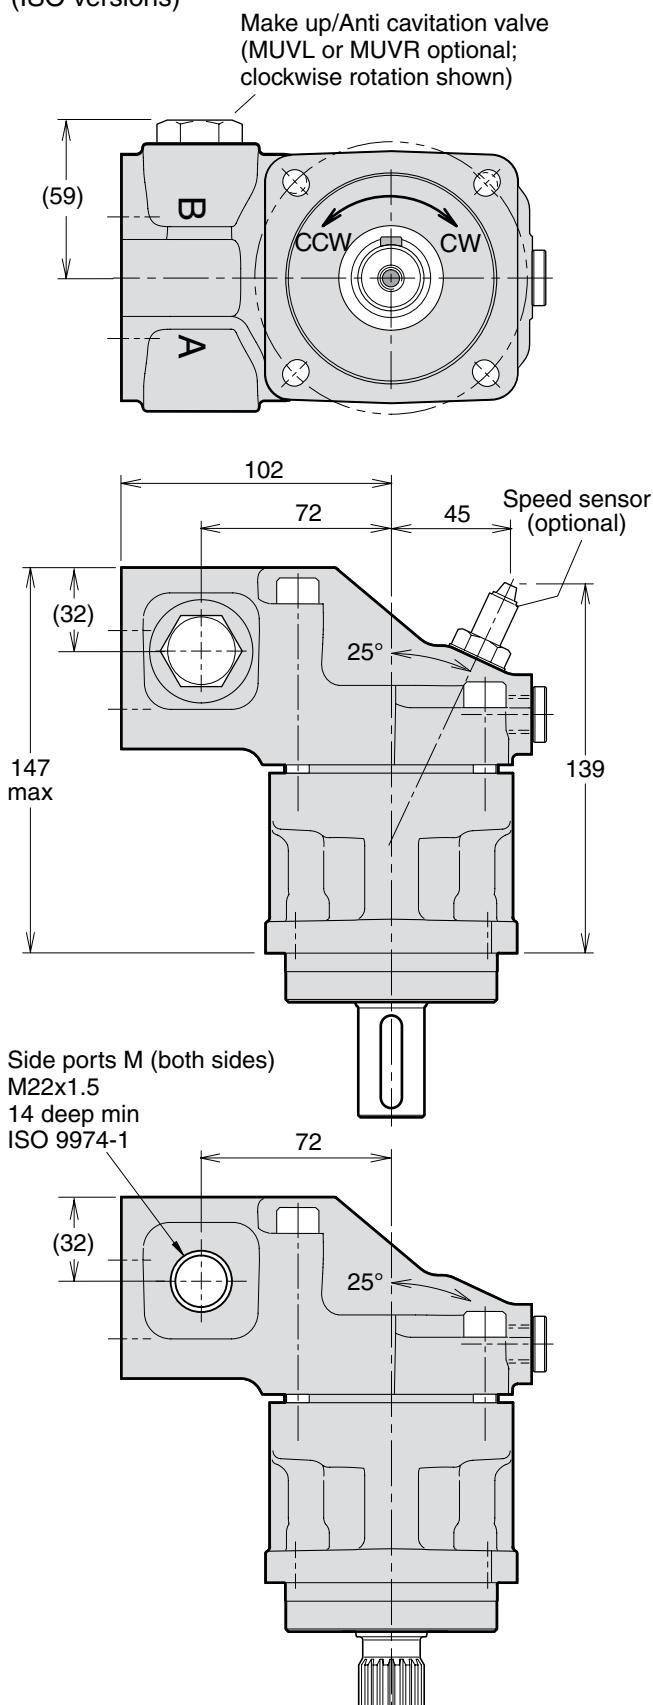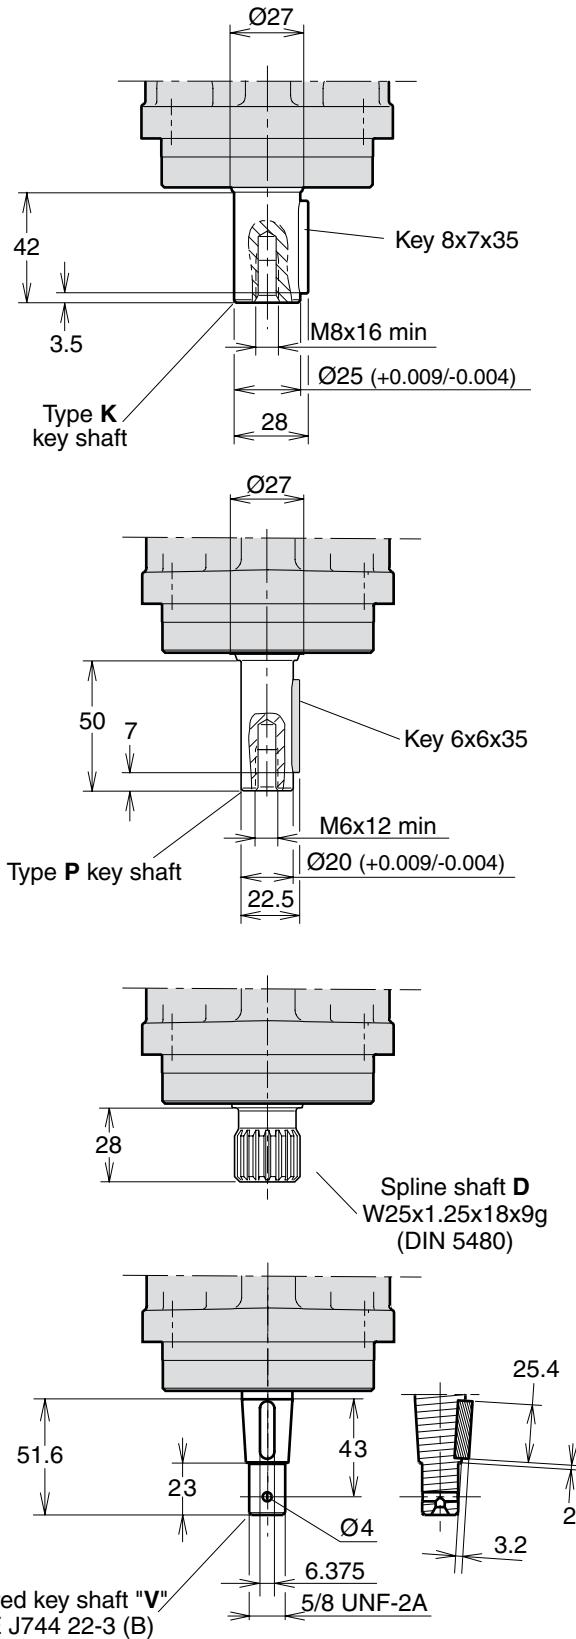**Shaft options**


**F11-006, -010**  
(SAE versions)

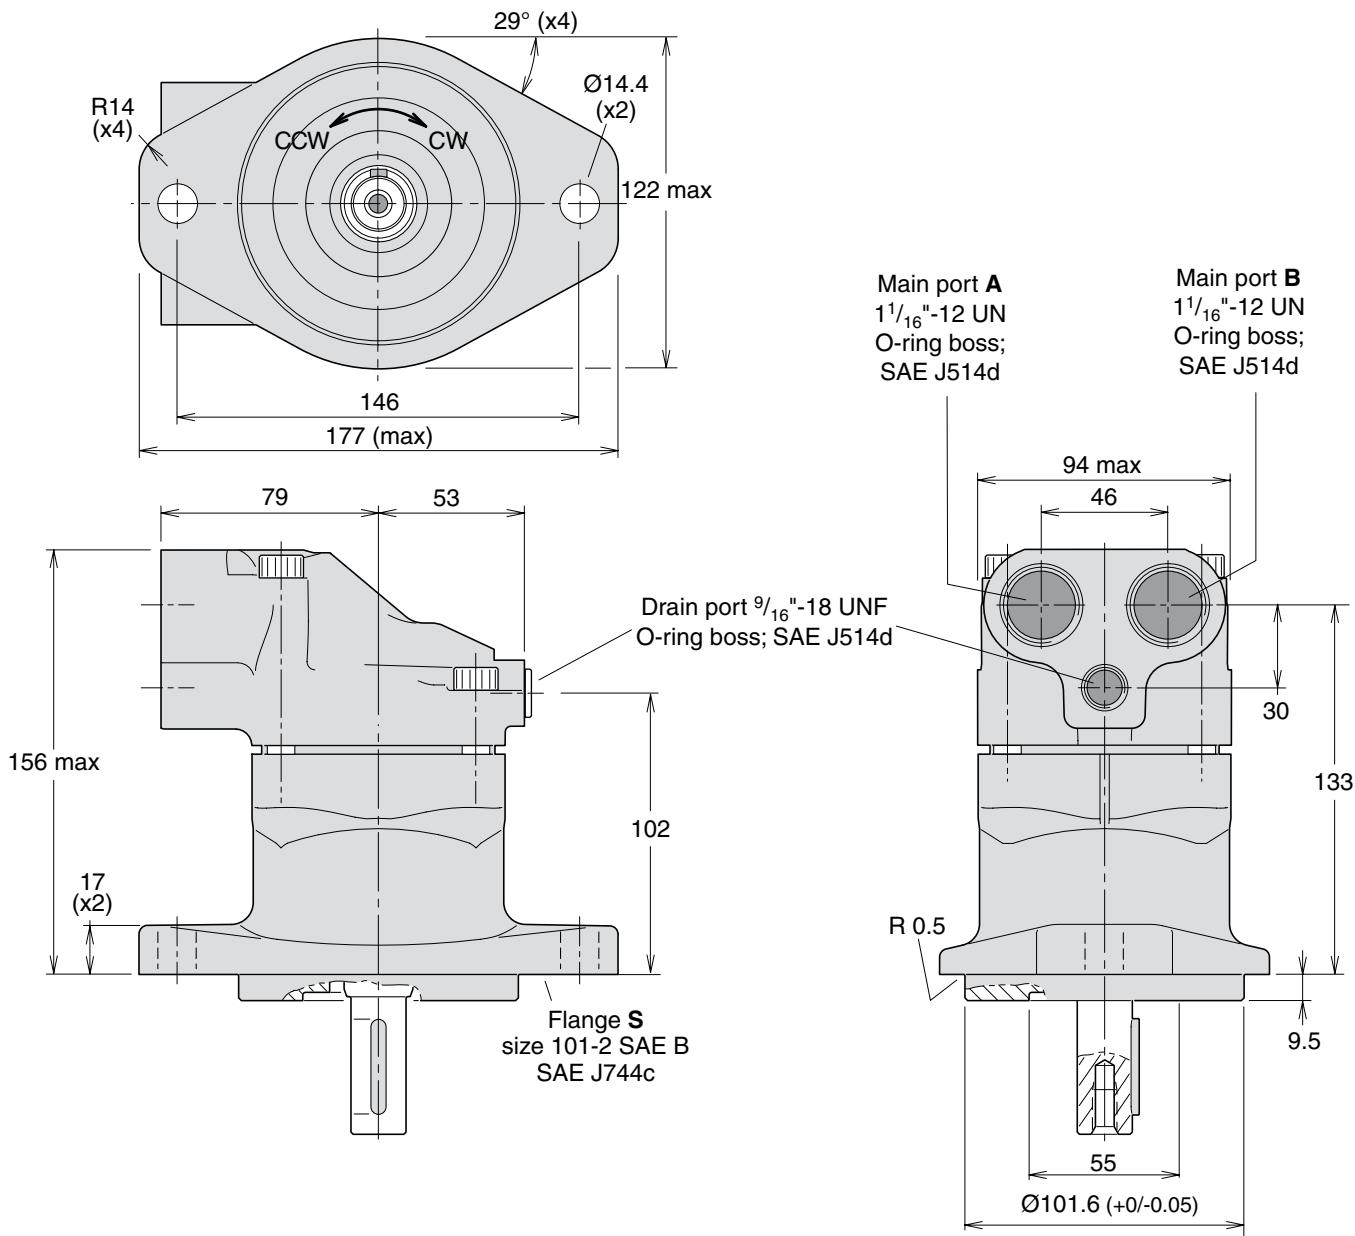


**F11-006, -010**

(SAE versions)

Make up/Anti cavitation valve  
(MUVL or MUVR optional;  
clockwise rotation shown)

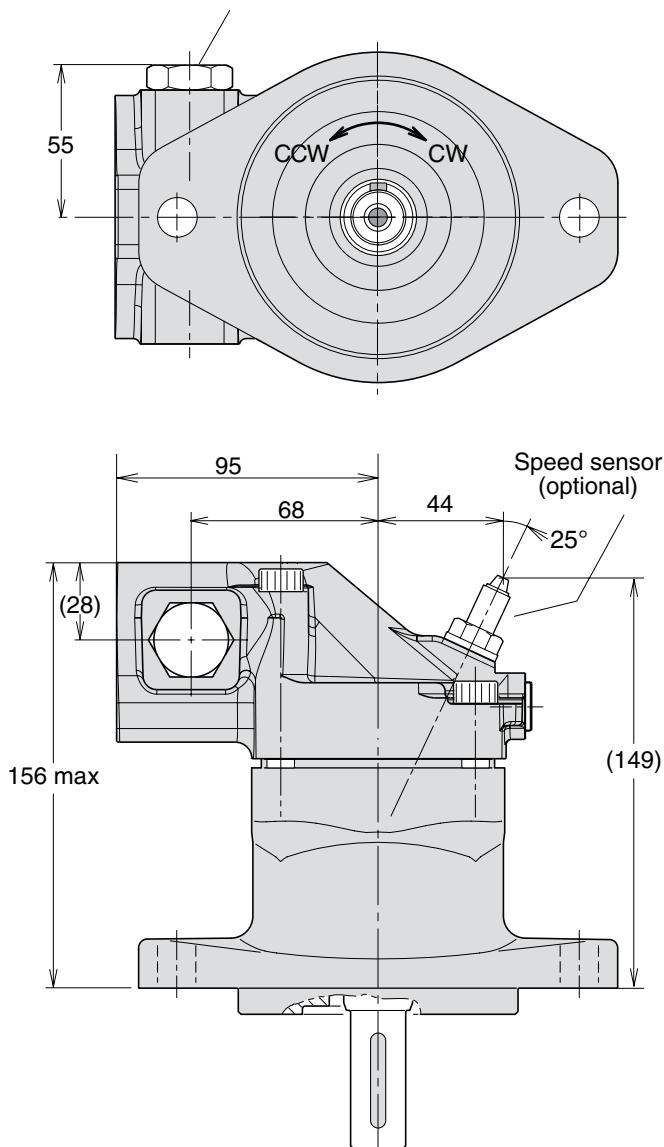

2



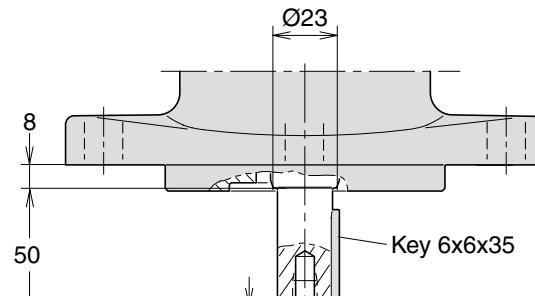
**Shaft options**

Type K key shaft  
(Std)


M6x12 min

$\varnothing 20 (+0.009/-0.004)$


22.5

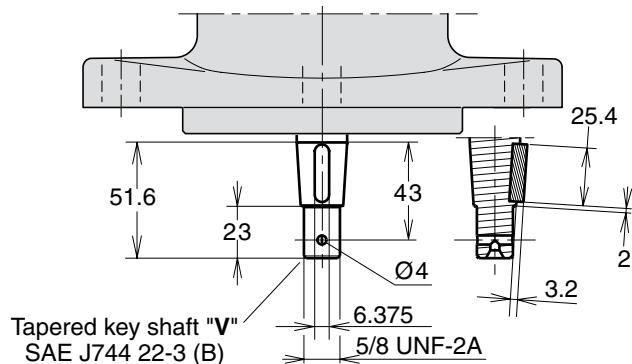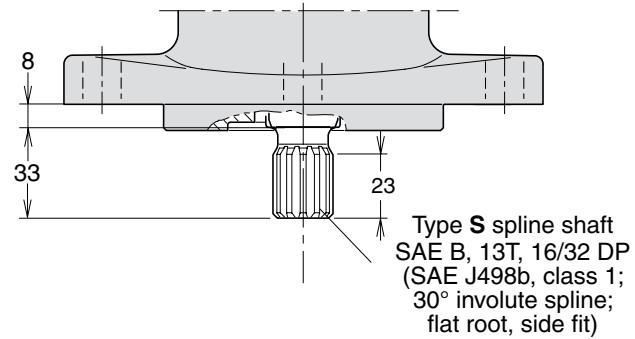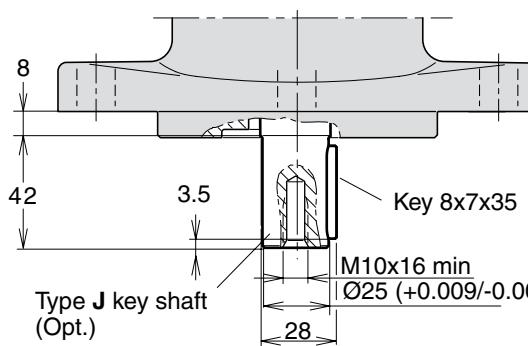


**F11-012**  
(SAE versions)

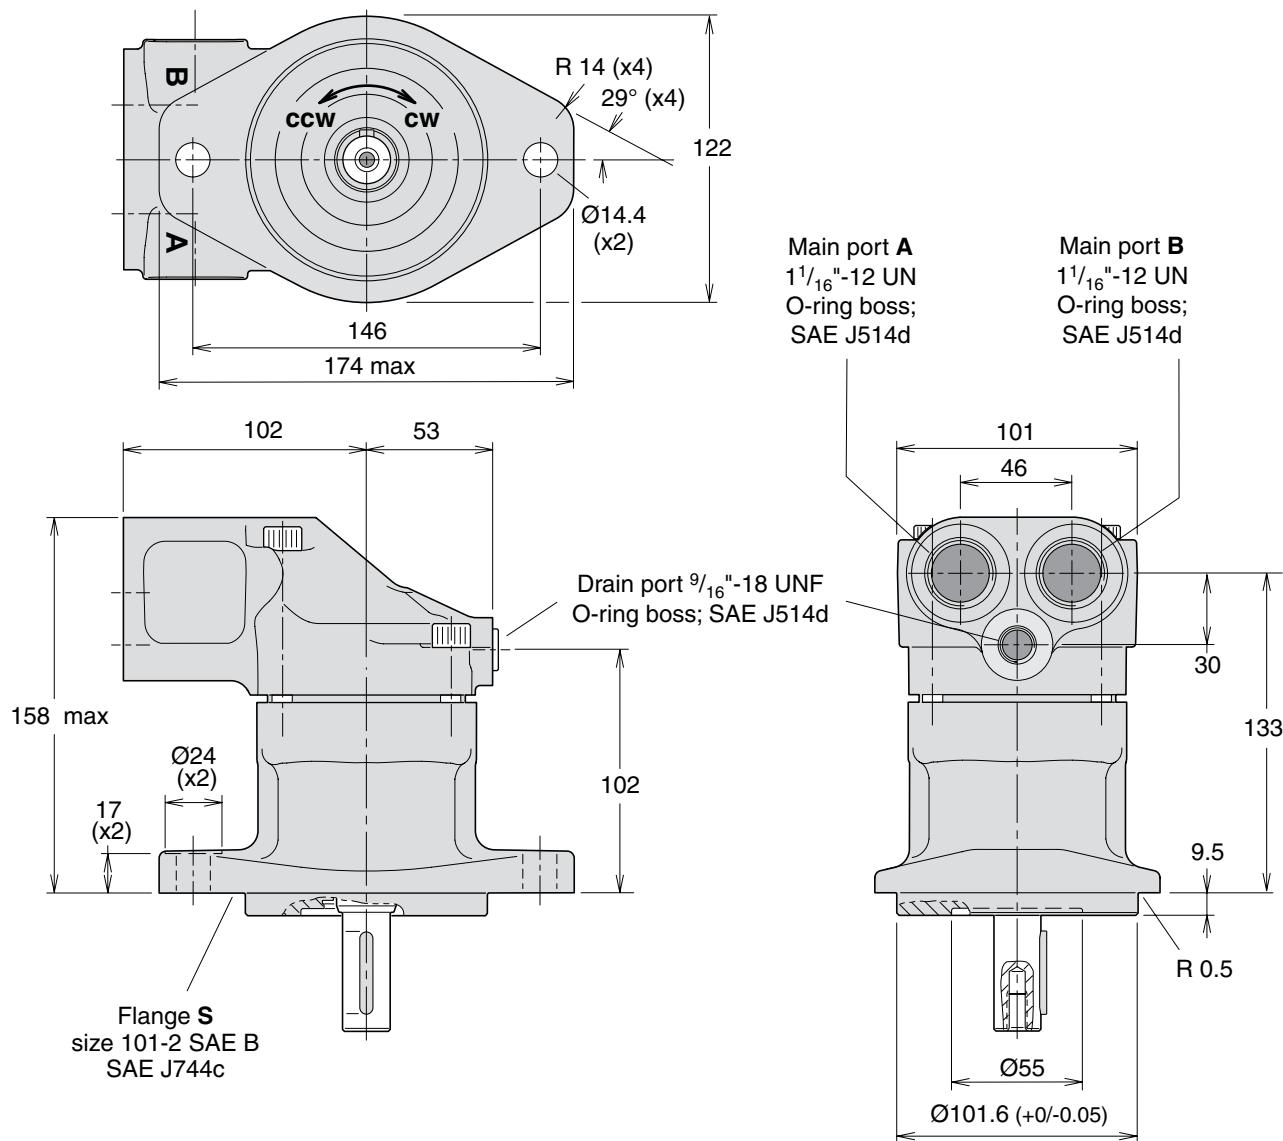


**F11-012**  
(SAE versions)

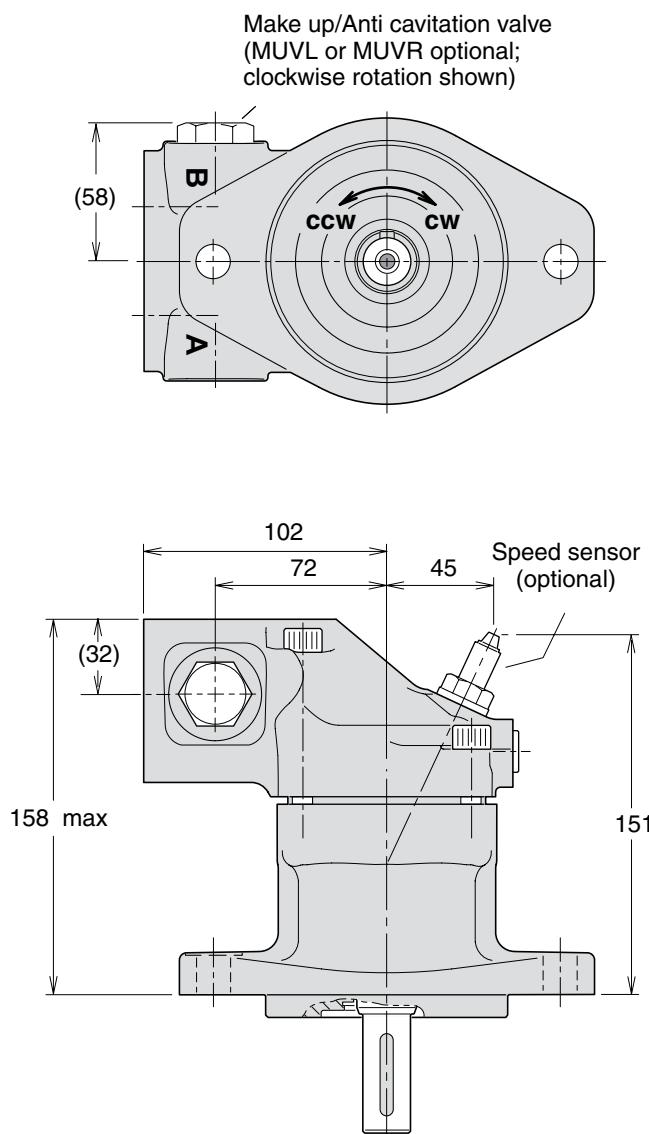

**Shaft options**

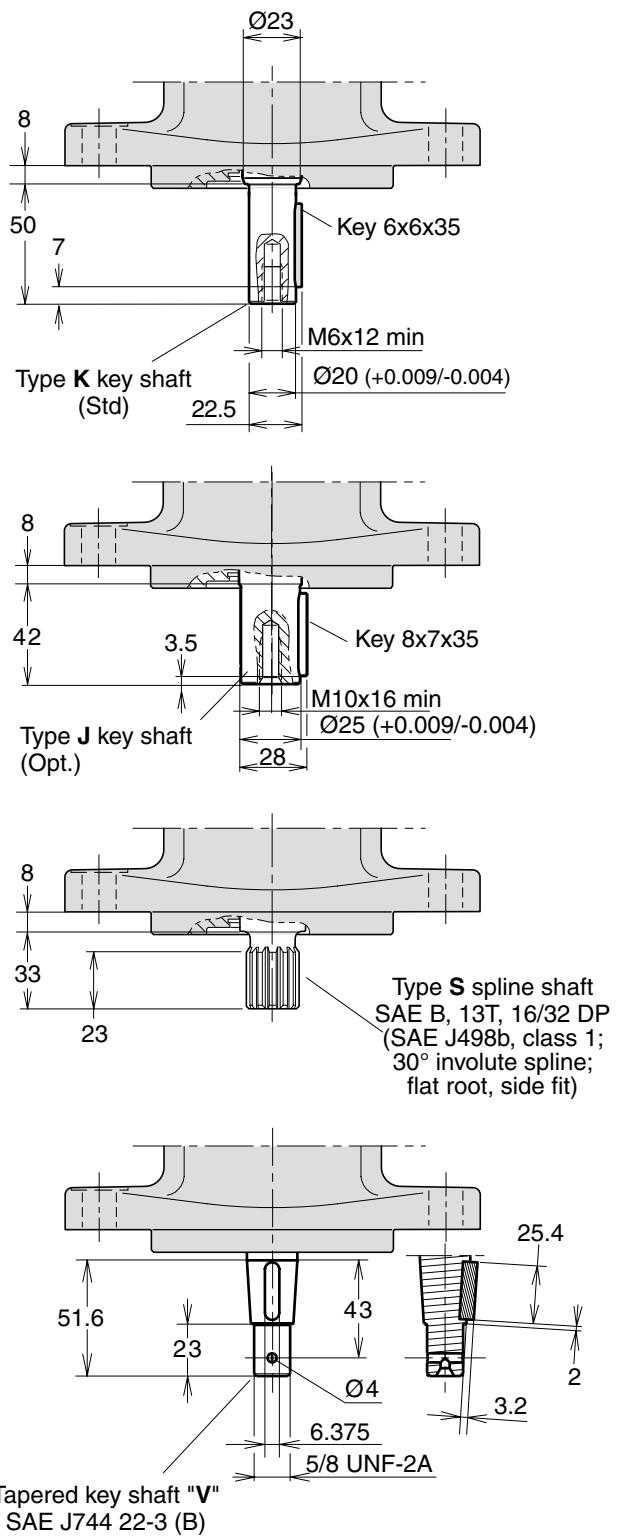


**F11-014**  
(SAE versions)

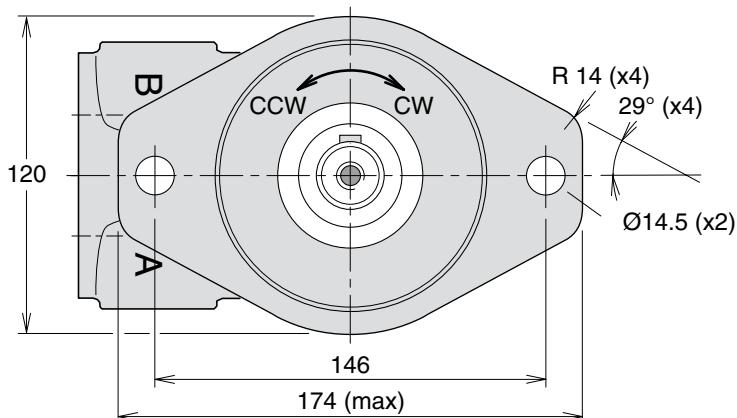


Type S mounting flange SAE 'B' ( SAE J744c)

Main port A  
 $1\frac{1}{16}$ "-12 UN  
O-ring boss;  
SAE J514d

Main port B  
 $1\frac{1}{16}$ "-12 UN  
O-ring boss;  
SAE J514d


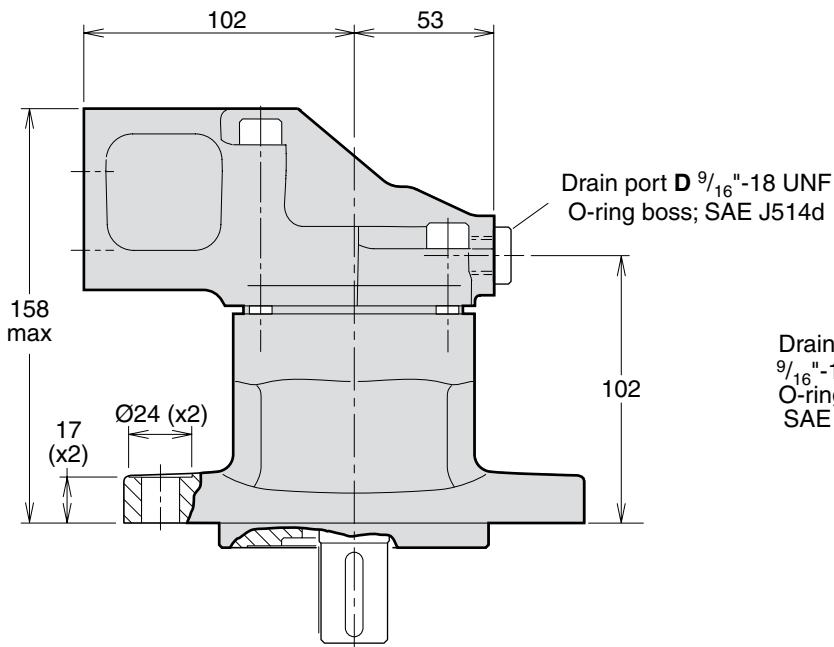


Drain port D  $\frac{9}{16}$ "-18 UNF  
O-ring boss; SAE J514d

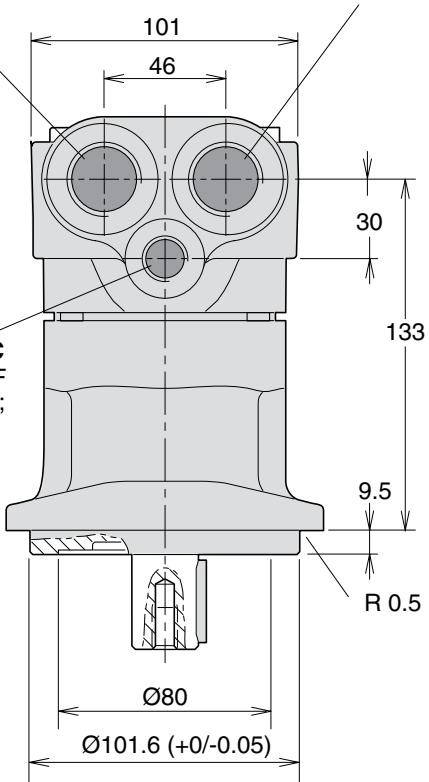


**F11-014**  
(SAE versions)


Make up/Anti cavitation valve  
(MUVL or MUVR optional;  
clockwise rotation shown)

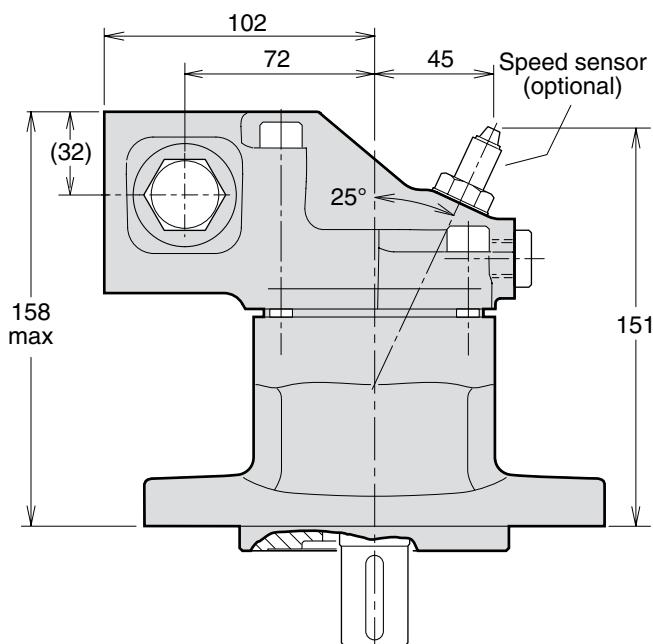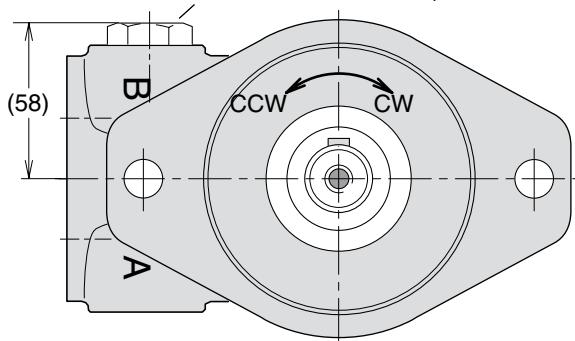


**Shaft options**

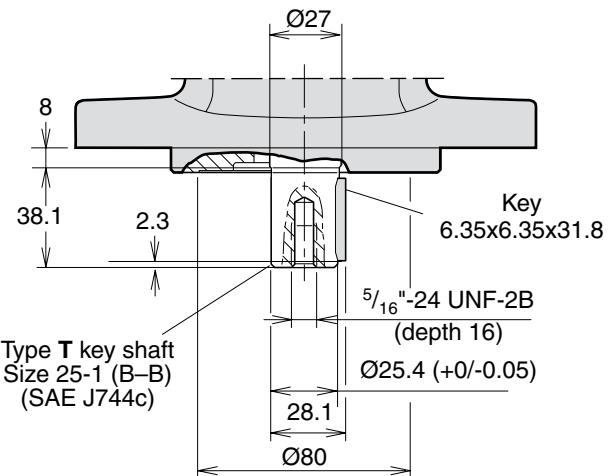

Type T key shaft  
Size 25-1 (B-B)  
(SAE J744c)

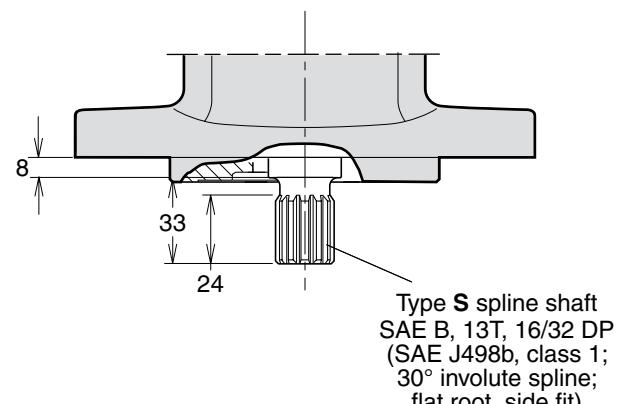


Type S spline shaft  
SAE B, 13T, 16/32 DP  
(SAE J498b, class 1;  
30° involute spline;  
flat root, side fit)


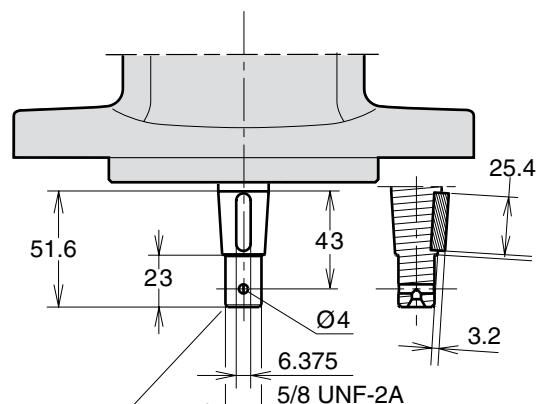


Tapered key shaft "V"  
SAE J744 22-3 (B)

**F11-019**  
(SAE version)

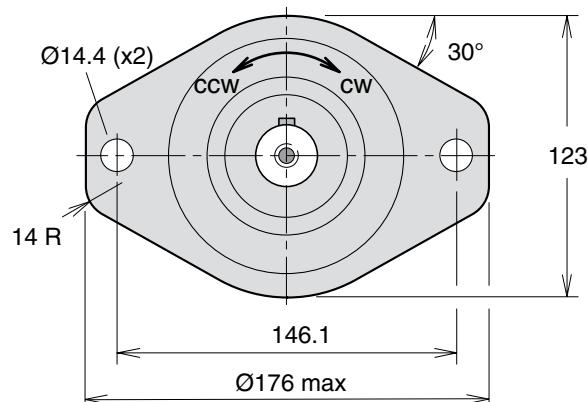


Type S mounting flange SAE 'B' (SAE J744c)

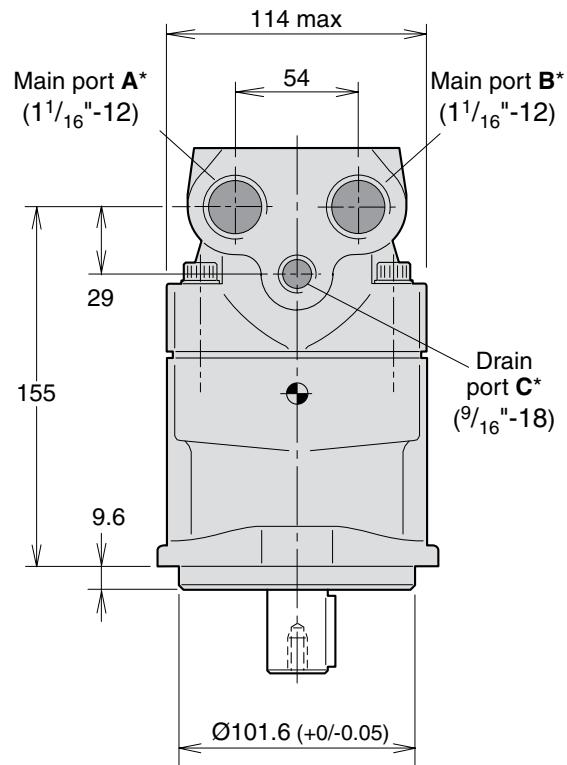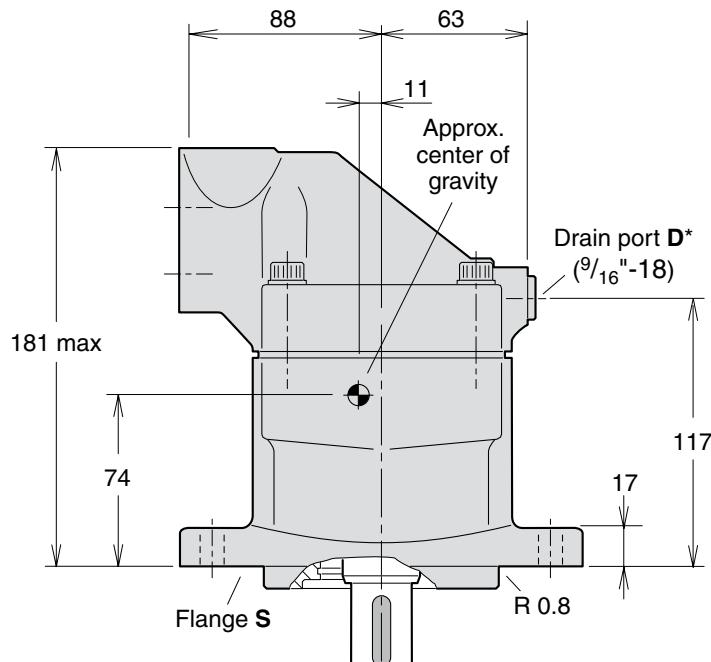


\* O-ring ports according to SAE J514d

**F11-019**  
(SAE version)


Make up/Anti cavitation valve  
(MUVL or MUVR optional;  
clockwise rotation shown)

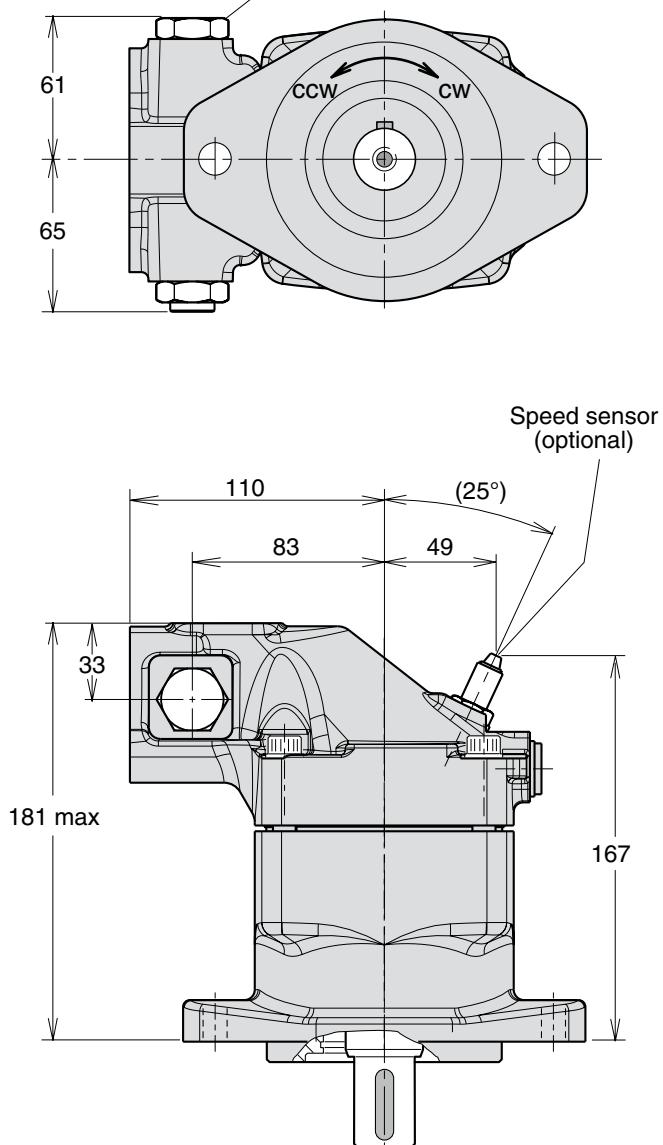


**Shaft options**

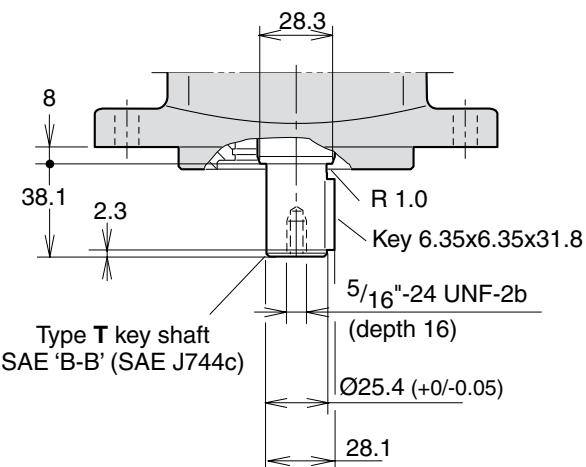


Type **T** key shaft  
SAE 'B-B' (SAE J744c)

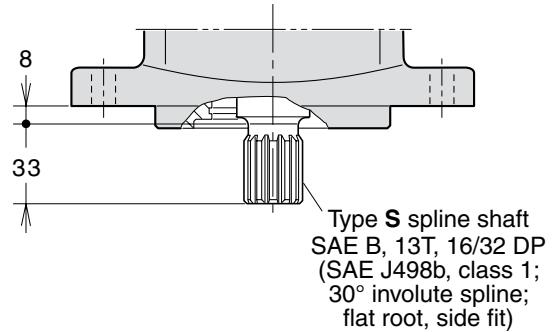

Type **S** spline shaft  
SAE B, 13T, 16/32 DP  
(SAE J498b, class 1;  
30° involute spline;  
flat root, side fit)

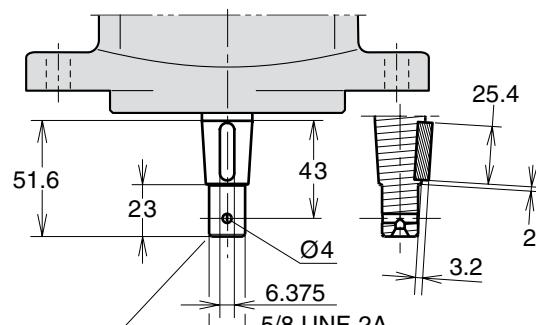


Tapered key shaft "V"  
SAE J744 22-3 (B)

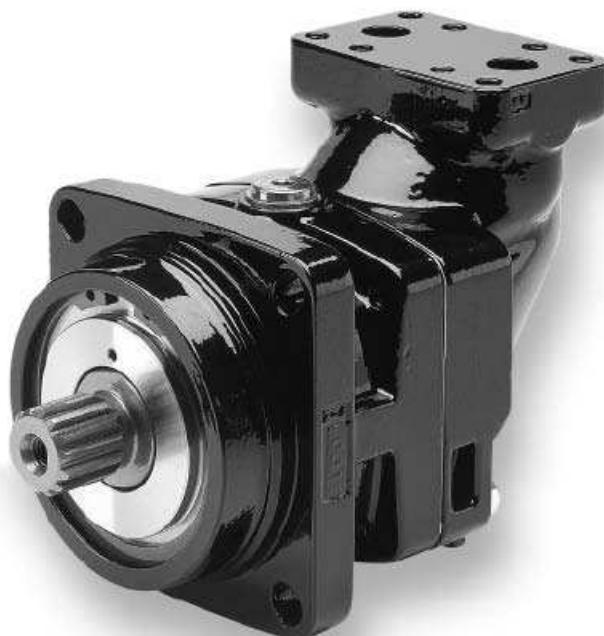**F12**

| <b>Content</b>   | <b>Page</b> |
|--|-------------|
| F12 cross sections.....  | 39          |
| Specifications .....   | 40          |
| Efficiency .....   | 41          |
| Noise level .....  | 41          |
| Selfpriming speed and required inlet pressure.....                     | 42          |
| Ordering codes   |             |
| F12-ISO .....  | 43          |
| F12-Cartridge .....  | 44          |
| F12-SAE.....   | 45          |
| Installation dimensions  |             |
| F12-030, -040, -060, -080, -090, -110 and -125 ISO.....                | 46          |
| F12-030, -040, -060, -080, -090, -110 and -125 Cartridge.....          | 48          |
| F12-030, -040, -060, -080, -090, -110 and -125 SAE 4 bolt flange ..... | 50          |
| F12-030, -040, and -060 SAE 2 bolt flange.....                         | 52          |
| F12-150 Cetop.....   | 54          |
| F12-150 SAE .....  | 55          |
| F12-250 SAE .....  | 56          |
| F12-250 SAE Options.....   | 57          |


## F12 cross sections

**F12-030, -040, -060, -080 and -090**  
(F12-060 shown)

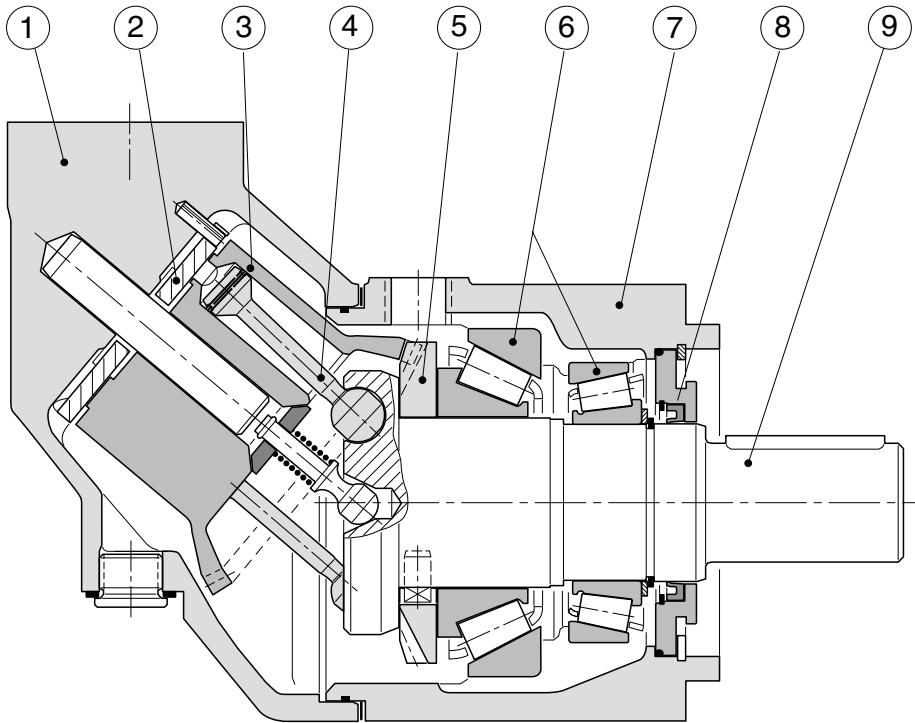

- Legend:
- |                            |                            |  |
|----------------------------|----------------------------|--|
| 1. Barrel housing          | 5. Timing gear             | 9. Output/input shaft                  |
| 2. Valve plate             | 6. Tapered roller bearings | 10. Port E (F12-110 and -125)          |
| 3. Cylinder barrel         | 7. Bearing housing         | 11. Needle bearings (F12-110 and -125) |
| 4. Piston with piston ring | 8. Shaft seal              |  |

**F12-110 and -125**  
(F12-110 shown)

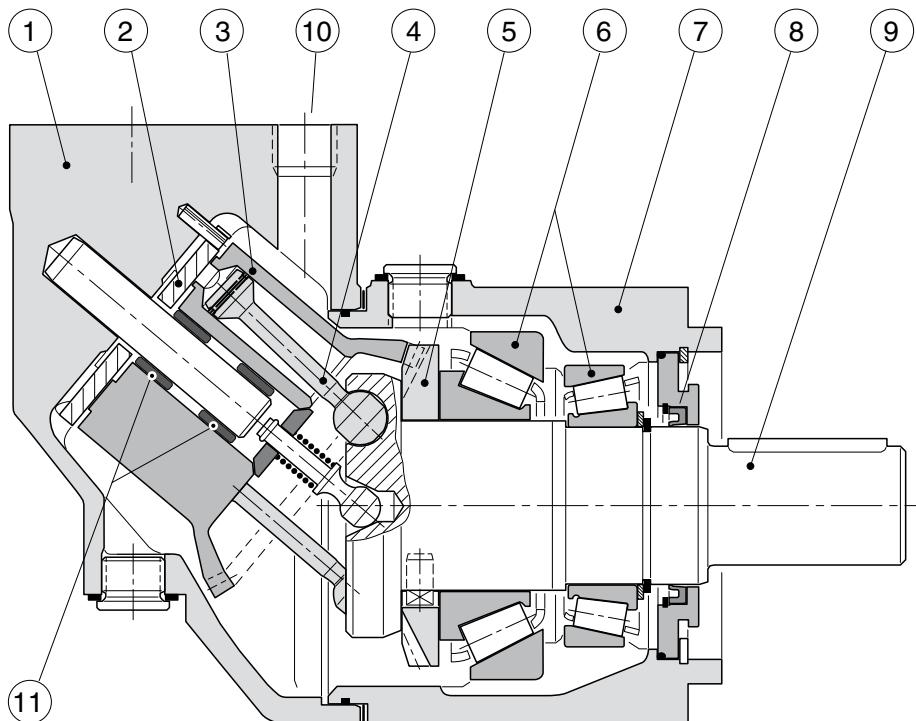

| <b>Frame size F12</b>                           | <b>-030</b> | <b>-040</b> | <b>-060</b> | <b>-080</b> | <b>-090</b> | <b>-110</b> | <b>-125</b> | <b>-150</b> | <b>-250</b> |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>Displacement [cm<sup>3</sup>/rev]</b>        | 30.0        | 40.0        | 59.8        | 80.4        | 93.0        | 110.1       | 125.0       | 150         | 242         |
| <b>Operating pressure</b>                       |             |             |             |             |             |             |             |             |             |
| max intermittent <sup>1)</sup> [bar]            | 480         | 480         | 480         | 480         | 420         | 480         | 480         | 420         | 420         |
| max continuous [bar]                            | 420         | 420         | 420         | 420         | 350         | 420         | 420         | 350         | 350         |
| <b>Motor operating speed [rpm]</b>              |             |             |             |             |             |             |             |             |             |
| max intermittent <sup>1)</sup>                  | 7 300       | 6 700       | 5 800       | 5 300       | 5 000       | 4 800       | 4 600       | 3 500       | 3 000       |
| max continuous <sup>3)</sup>                    | 6 700       | 6 100       | 5 300       | 4 800       | 4 600       | 4 400       | 4 200       | 3 200       | 2 700       |
| min continuous                                  | 50          | 50          | 50          | 50          | 50          | 50          | 50          | 50          | 50          |
| <b>Max pump selfpriming speed<sup>2)</sup></b>  |             |             |             |             |             |             |             |             |             |
| L or R function; max [rpm]                      | 3150        | 2870        | 2500        | 2300        | 2 250       | 2200        | 2 100       | 1 700       | 1 500       |
| <b>Motor input flow</b>                         |             |             |             |             |             |             |             |             |             |
| max intermittent <sup>1)</sup> [l/min]          | 219         | 268         | 347         | 426         | 465         | 528         | 575         | 525         | 726         |
| max continuous [l/min]                          | 201         | 244         | 317         | 386         | 428         | 484         | 525         | 480         | 653         |
| <b>Drain temperature<sup>3)</sup>, max [°C]</b> | 115         | 115         | 115         | 115         | 115         | 115         | 115         | 115         | 115         |
| min [°C]  | -40         | -40         | -40         | -40         | -40         | -40         | -40         | -40         | -40         |
| <b>Theoretical torque at 100 bar [Nm]</b>       | 47.6        | 63.5        | 94.9        | 127.6       | 147.6       | 174.8       | 198.4       | 238.1       | 384.1       |
| <b>Mass moment of inertia</b>                   |             |             |             |             |             |             |             |             |             |
| (x10 <sup>-3</sup> ) [kg m <sup>2</sup> ]       | 1.7         | 2.9         | 5           | 8.4         | 8.4         | 11.2        | 11.2        | 40          | 46          |
| <b>Weight [kg]</b>                              | 12          | 16.5        | 21          | 26          | 26          | 36          | 36          | 70          | 77          |

1) Intermittent: max 6 seconds in any one minute.

2) Selfpriming speed valid at sea level. Find more info on page 42

3) See also installation information. Page 67

## Efficiency


Because of its high overall efficiency, driving a motor/pump from series F12 requires less fuel or electric power.

Also, it allows the use of a small reservoir and heat exchanger, which in turn reduce cost, weight, and installation size.

The diagrams to the right show volumetric and mechanical efficiencies of an F12-030 motor.

F12-030 motors can be equipped with Power Boost which in high speed applications can decrease the mechanical losses by up to 15%, see page 7.

Contact Parker Hannifin for efficiency information on a particular F12 frame size that is being considered.

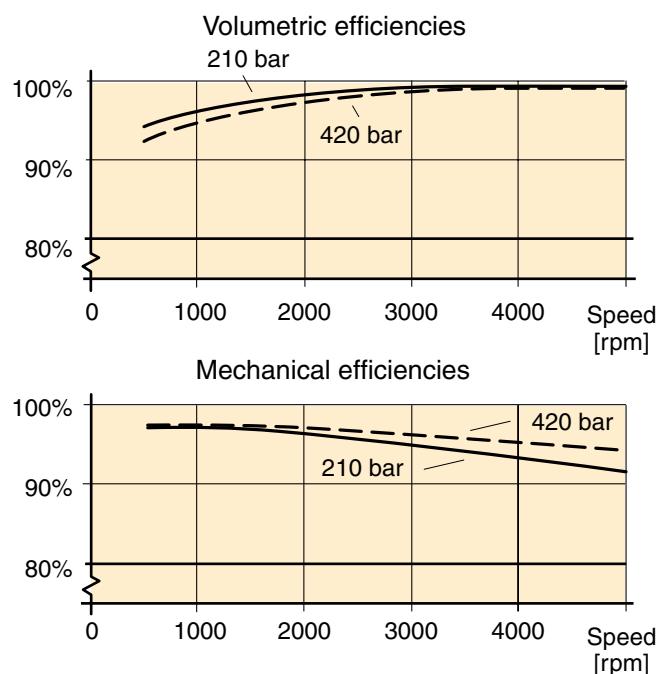


## Noise level

Series F12 feature low noise levels from low to high speeds and pressures.

As an example, the diagram to the right shows the noise level of an F12-030 pump/motor.

The noise level is measured in a semi-anechoic room, 1 m behind the unit.

The noise level for a particular motor/pump may vary  $\pm 2$  dB(A) compared to what is shown in the diagram.

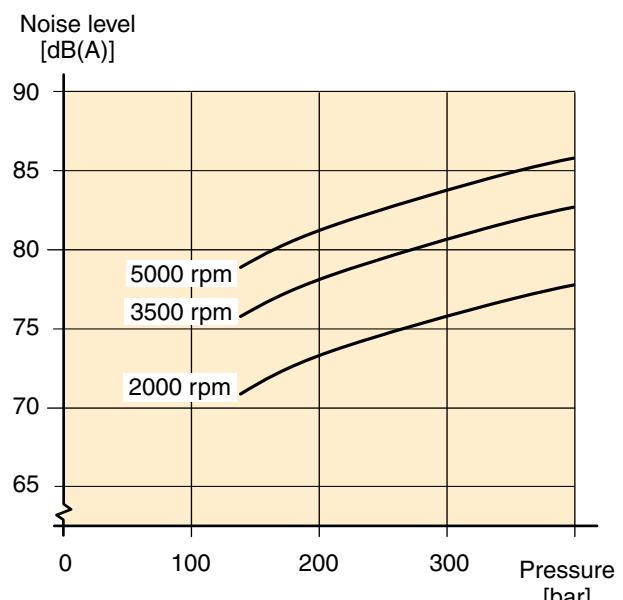

NOTE: Noise information for F12 frame sizes are available from Parker Hannifin.

## **Selfpriming speed and required inlet pressure**

### **Series F12**

When operating the F12 as a pump (with L or R valve plate) above the selfpriming speed, the inlet must be pressurized. Increased noise and deteriorating performance may otherwise be experienced.


Diagrams 2 and 3 shows required pump inlet pressure vs. shaft speed.

The F12 motor (type M valve plate) sometimes operates as a pump e.g. when used in a propel transmission and the vehicle is going downhill.


Minimum required inlet pressure versus shaft speed is shown in the diagrams.

The inlet pressure can be charged by external pump, pressurized reservoir or using BLA Boost unit.


Find more info about the BLA unit at page 66.

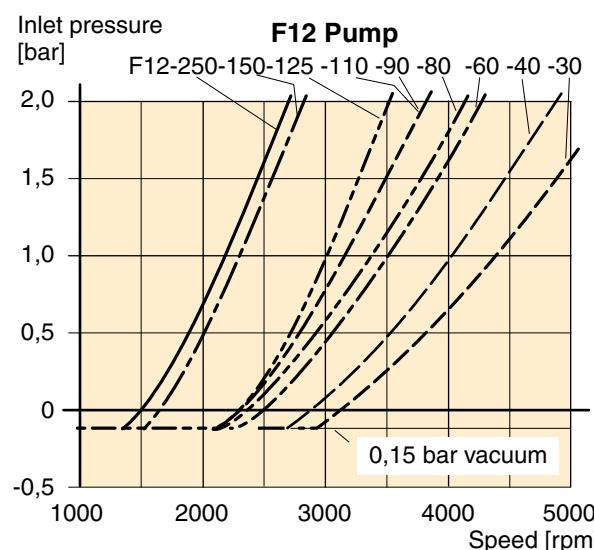


*Diagram 2. Min. required pump (F12-L or -R) inlet press.*

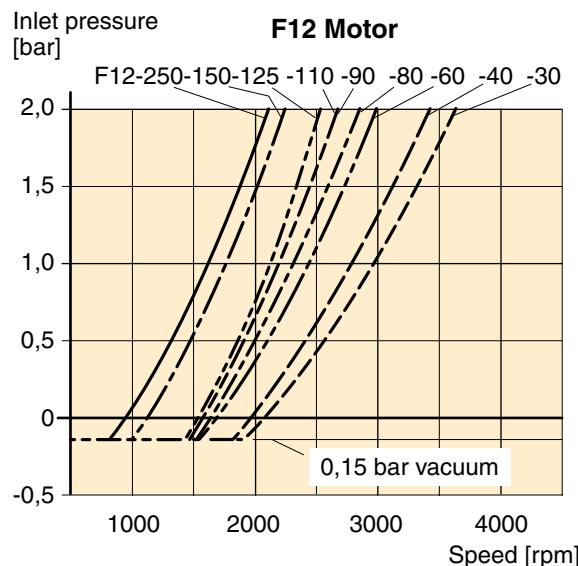

*Diagram 3. Min. required motor (F12-M) inlet pressure.*

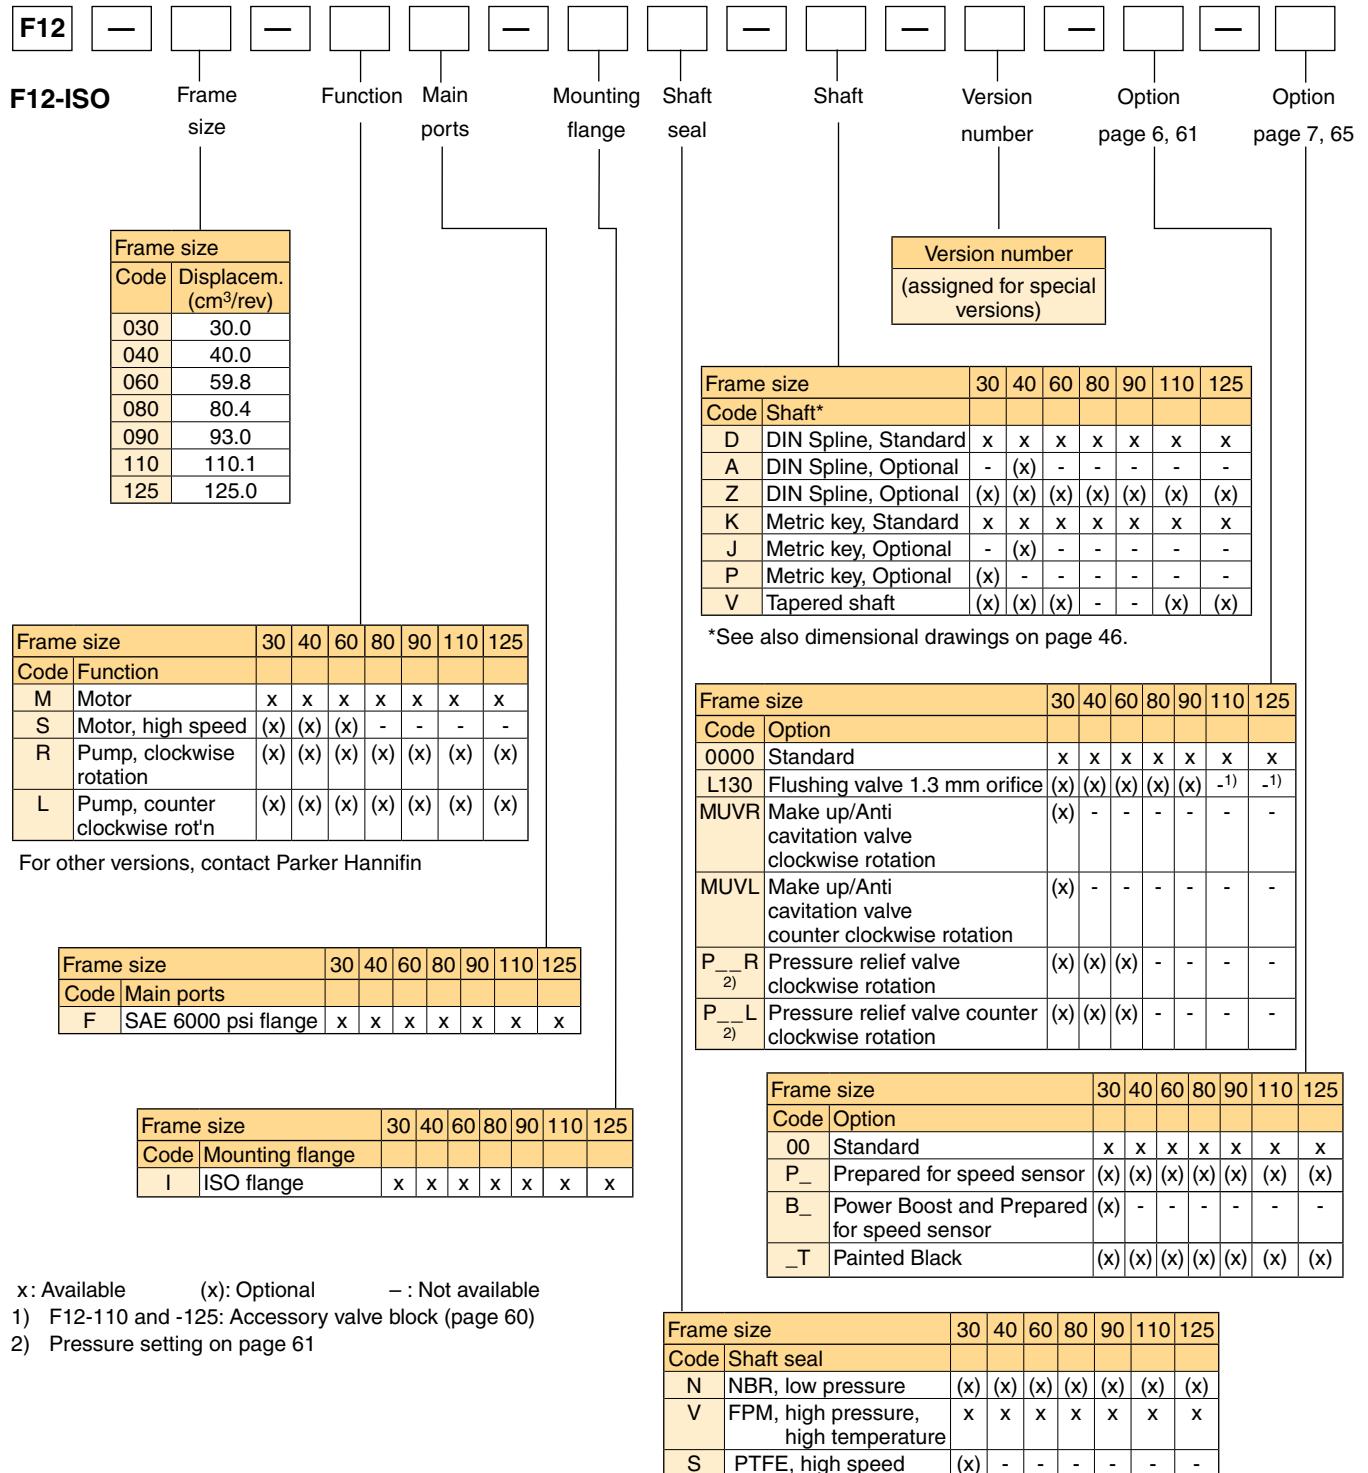

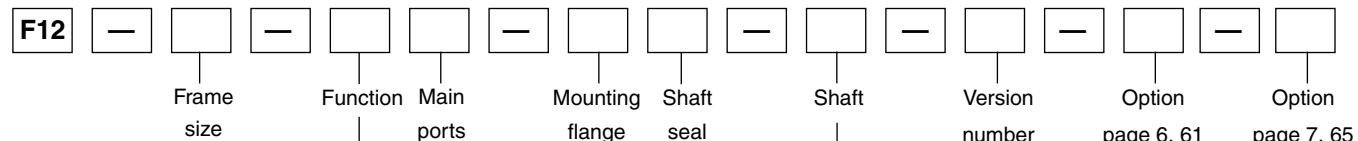**F12-Cartridge****CETOP**

| Frame size |                                      |
|------------|--------------------------------------|
| Code       | Displacem.<br>(cm <sup>3</sup> /rev) |
| 030        | 30.0                                 |
| 040        | 40.0                                 |
| 060        | 59.8                                 |
| 080        | 80.4                                 |
| 090        | 93.0                                 |
| 110        | 110.1                                |
| 125        | 125.0                                |
| 150        | 150.0                                |

| Frame size |                    | 30  | 40  | 60  | 80  | 90  | 110 | 125 | 150 |
|------------|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Code       | Shaft*             |     |     |     |     |     |     |     |     |
| C          | DIN Spline, Std.   | x   | x   | x   | x   | x   | x   | x   | -   |
| K          | Metric key, Option | (x) | -   | (x) | (x) | (x) | (x) | (x) | x   |
| J          | Metric key, Option | -   | (x) | -   | -   | -   | -   | -   | -   |
| B          | Spline DIN 5480    | -   | -   | (x) | -   | -   | (x) | (x) | -   |
| D          | Spline DIN 5480    | -   | -   | -   | -   | -   | -   | -   | (x) |
| V          | Tapered shaft      | (x) | (x) | (x) | -   | -   | (x) | (x) | -   |

\*See also dimensional drawings on pages 48 and 54.

| Frame size | 30                            | 40  | 60  | 80  | 90 | 110 | 125 | 150 |
|------------|-------------------------------|-----|-----|-----|----|-----|-----|-----|
| Code       | Function                      |     |     |     |    |     |     |     |
| M          | Motor                         | x   | x   | x   | x  | x   | x   | x   |
| S          | Motor, high speed             | (x) | (x) | (x) | -  | -   | -   | -   |
| R          | Pump, clockwise rotation      | -   | -   | -   | -  | -   | -   | (x) |
| L          | Pump, counter clockwise rot'n | -   | -   | -   | -  | -   | -   | (x) |

For other versions, contact Parker Hannifin

| Frame size | 30                  | 40 | 60 | 80 | 90 | 110 | 125 | 150 |
|------------|---------------------|----|----|----|----|-----|-----|-----|
| Code       | Main ports          |    |    |    |    |     |     |     |
| F          | SAE 6000 psi flange | x  | x  | x  | x  | x   | x   | x   |

| Frame size | 30              | 40 | 60 | 80 | 90 | 110 | 125 | 150 |
|------------|-----------------|----|----|----|----|-----|-----|-----|
| Code       | Mounting flange |    |    |    |    |     |     |     |
| C          | Cartridge       | x  | x  | x  | x  | x   | x   | -   |
| C          | CETOP           | -  | -  | -  | -  | -   | -   | x   |


x: Available      (x): Optional      - : Not available

1) F12-110 and -125: Accessory valve block (page 60)

2) Pressure setting on page 61

| Frame size | 30  | 40  | 60  | 80  | 90  | 110 | 125 | 150 |
|------------|---|-----|-----|-----|-----|-----|-----|-----|
| Code       | Option                                    |     |     |     |     |     |     |     |
| 00         | Standard                                  | x   | x   | x   | x   | x   | x   | x   |
| P_         | Prepared for speed sensor                 | x   | (x) | (x) | (x) | x   | x   | -   |
| B_         | Power Boost and Prepared for speed sensor | (x) | -   | -   | -   | -   | -   | -   |
| _T         | Painted Black                             | (x) |

| Frame size | 30                                   | 40  | 60  | 80  | 90  | 110 | 125 | 150 |
|------------|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|
| Code       | Shaft seal                           |     |     |     |     |     |     |     |
| N          | NBR, low pressure                    | (x) |
| V          | FPM, high pressure, high temperature | x   | x   | x   | x   | x   | x   | x   |
| S          | PTFE, high speed                     | (x) | -   | -   | -   | -   | -   | -   |


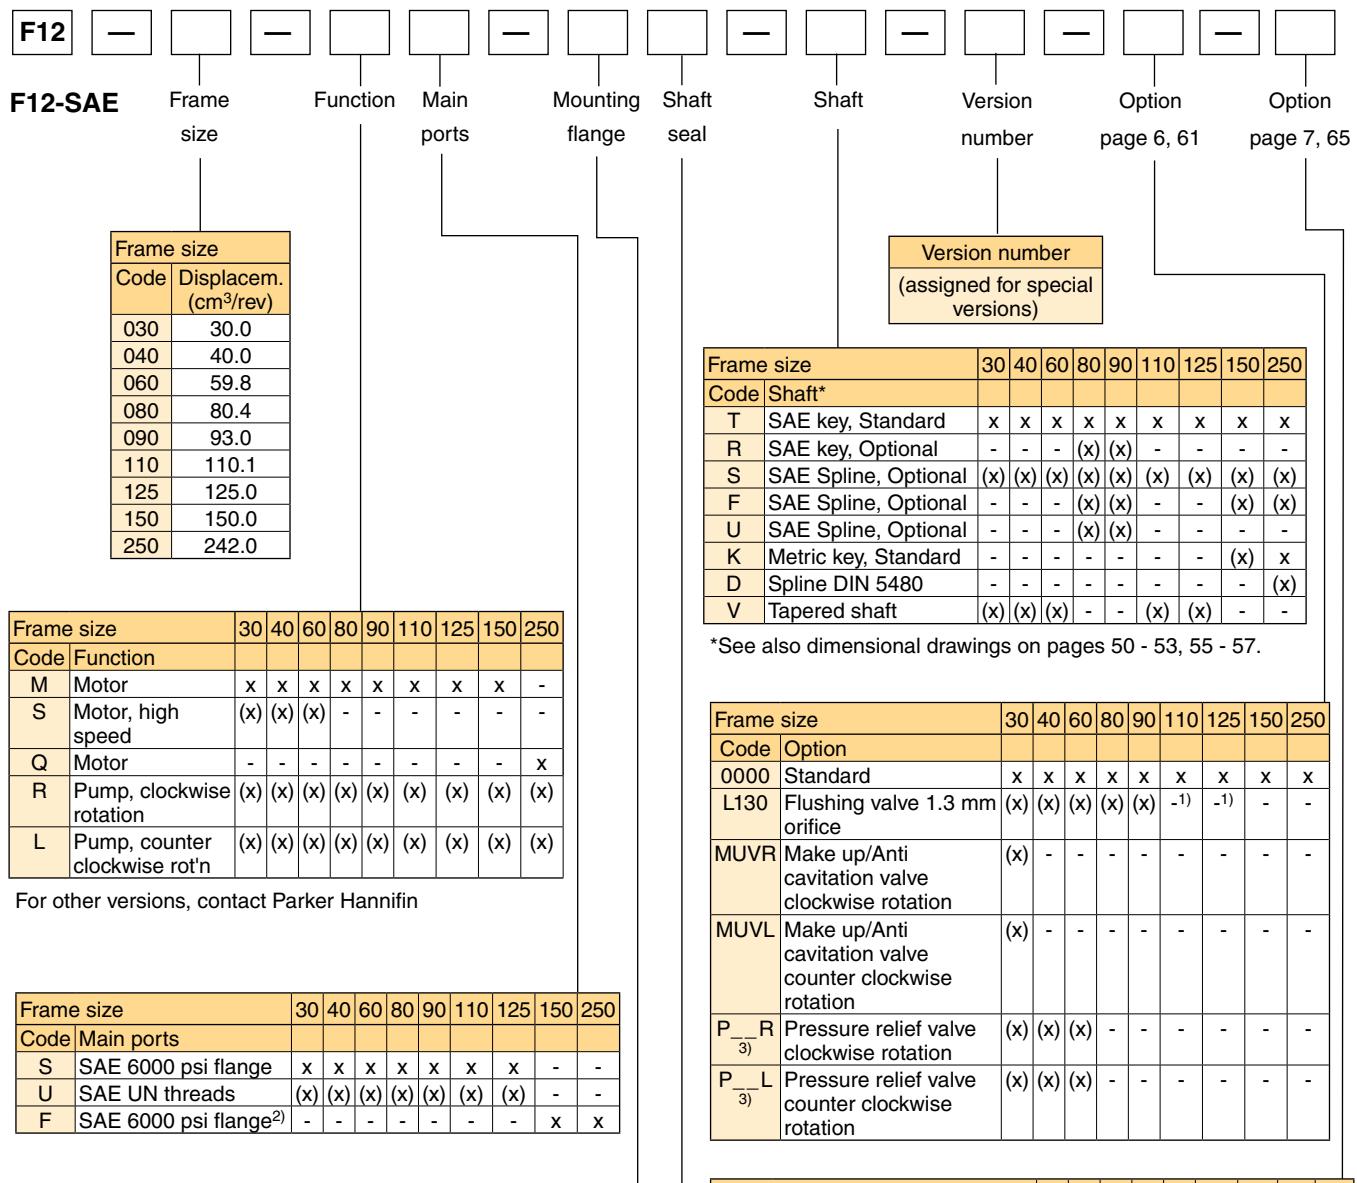


x: Available      (x): Optional      – : Not available


- 1) F12-110 and -125: Accessory valve block (page 60)
- 2) Metric threads
- 3) Pressure setting on page 61

**F12-30, -40, -60, -80, -90, -110 and -125**


(ISO versions)

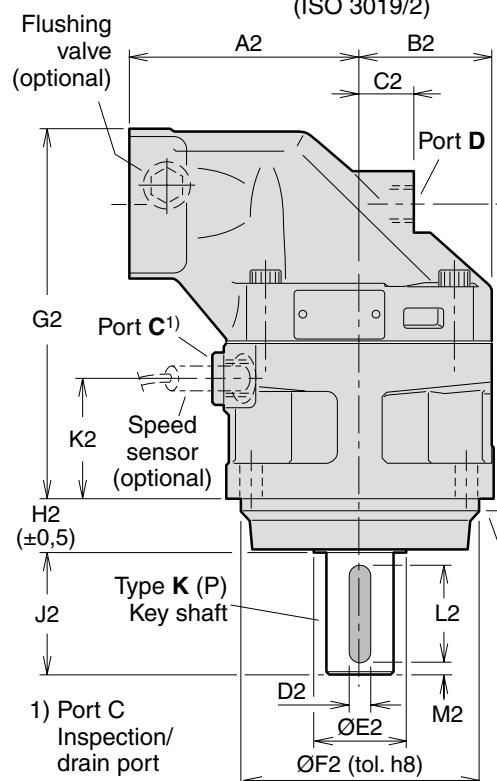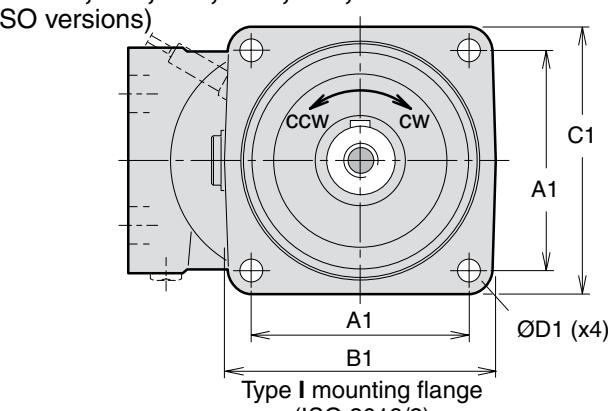


F12-80 shown

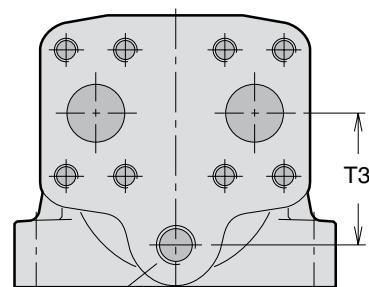

Port E (third drain port)  
F12-110 and -125 barrel housing  
(ISO /cartridge version)

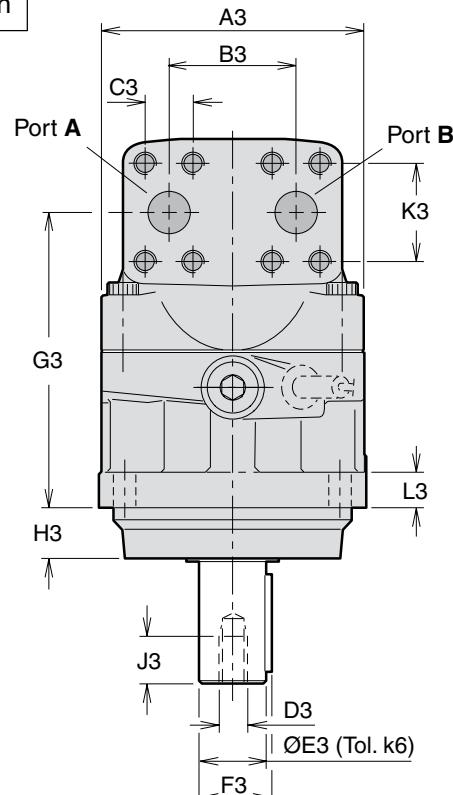


**Shaft option D (Z)**

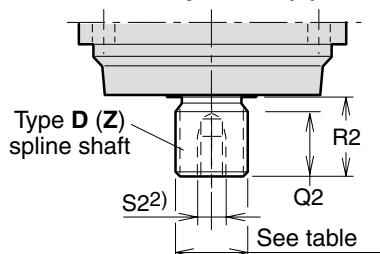


2) Type Z has no thread


**Shaft option V (F12-30)**

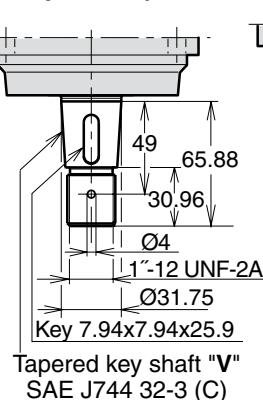

**Shaft option V (F12-40)**

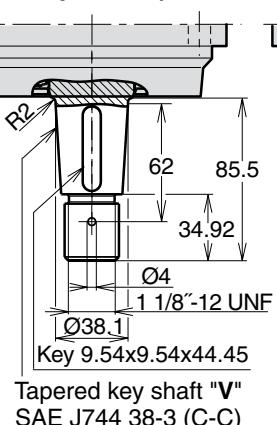

**Shaft option V (F12-60)**

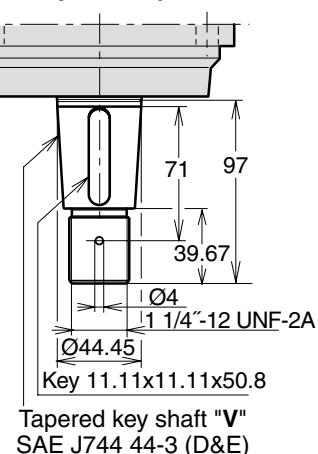

| Dim.             | F12-30     | F12-40     | F12-60     | F12-80<br>F12-90 | F12-110<br>F12-125 |
|------------------|------------|------------|------------|------------------|--------------------|
| A1               | 88.4       | 113.2      | 113.2      | 127.2            | 141.4              |
| B1               | 118        | 146        | 146        | 158              | 180                |
| C1               | 118        | 142        | 144        | 155              | 180                |
| D1               | 11         | 13.5       | 13.5       | 13.5             | 18                 |
| A2               | 100        | 110        | 125        | 135              | 145                |
| B2               | 59         | 65         | 70         | 78               | 85                 |
| C2               | 25         | 26         | 22         | 32               | 38                 |
| D2               | 8          | 8          | 10         | 12               | 14                 |
| E2               | 33         | 42         | 42         | 52               | 58                 |
| F2               | 100        | 125        | 125        | 140              | 160                |
| G2               | 172        | 173        | 190        | 216              | 231                |
| H2               | 25.5       | 32.5       | 32.5       | 32.5             | 40.5               |
| J2               | 50         | 60         | 60         | 70               | 82                 |
| K2               | 55         | 52         | 54         | 70.5             | 66.5               |
| L2               | 40         | 50         | 50         | 56               | 70                 |
| M2               | 5          | 5          | 5          | 7                | 6                  |
| N2               | 136.5      | 137        | 154        | 172.5            | 179                |
| P2               | 8          | 8          | 8          | 8                | 8                  |
| Q2               | 28         | 28         | 33         | 36               | 41                 |
| R2 <sup>1)</sup> | 35         | 35         | 40         | 45               | 50                 |
| R2 <sup>2)</sup> | 43         | 35         | 35         | 41               | -                  |
| S2 <sup>1)</sup> | M12<br>x24 | M12<br>x24 | M12<br>x28 | M16<br>x36       | M16 x36            |
| S2 <sup>2)</sup> | -          | M12<br>x24 | -          | M12<br>x28       | -                  |
| A3               | 122        | 134        | 144        | 155              | 170                |
| B3               | 66         | 66         | 66         | 75               | 83                 |
| C3               | 23.8       | 23.8       | 23.8       | 27.8             | 31.8               |
| D3               | M12        | M12        | M12        | M16              | M16                |
| E3               | 30         | 30         | 35         | 40               | 45                 |
| F3               | 33         | 33         | 38         | 43               | 49                 |
| G3               | 136.5      | 137        | 154        | 172.5            | 179                |
| H3               | 23.5       | 30.5       | 30.5       | 30.5             | 38.5               |
| J3               | 24         | 24         | 28         | 36               | 36                 |
| K3               | 50.8       | 50.8       | 50.8       | 57.2             | 66.7               |
| L3               | 18         | 20         | 20         | 20               | 22                 |
| T3               | -          | -          | -          | -                | 68                 |

| Ports                      | F12-30   | F12-40   | F12-60   | F12-80<br>F12-90 | F12-110<br>F12-125 |
|----------------------------|----------|----------|----------|------------------|--------------------|
| A, B size                  | 3/4"     | 3/4"     | 3/4"     | 1"               | 1 1/4"             |
| Screw thread <sup>*)</sup> | M10 x20  | M10 x20  | M10 x20  | M12 x20          | M14 x26            |
| C thread <sup>**)</sup>    | M22 x1.5 | M22 x1.5 | M22 x1.5 | M22 x1.5         | M22 x1.5           |
| D thread <sup>**)†</sup>   | M18 x1.5 | M18 x1.5 | M22 x1.5 | M22 x1.5         | M22 x1.5           |
| E thread                   | -        | -        | -        | -                | M22 x1.5           |

A, B: ISO 6162      \*) Metric thread x depth in mm

\*\*) Metric thread x pitch in mm.

3

### Spline shaft (DIN 5480)

|        | Type D (std) | Type A      | Type Z (optional)            |
|--------|--------------|-------------|------------------------------|
| F12-30 | W30x2x14x9g  | -           | W25x1.25x18x9g <sup>3)</sup> |
| -40    | W32x2x14x9g  | W35x2x16x9g | W30x2x14x9g                  |
| -60    | W35x2x16x9g  | -           | W32x2x14x9g                  |
| -80    | W40x2x18x9g  | -           | W35x2x16x9g <sup>3)</sup>    |
| -90    | W40x2x18x9g  | -           | W35x2x16x9g <sup>3)</sup>    |
| -110   | W45x2x21x9g  | -           | W40x2x18x9g <sup>3)</sup>    |
| -125   | W45x2x21x9g  | -           | W40x2x18x9g <sup>3)</sup>    |


### Key shaft

|        | Type K (std) | Type P (opt.)     | Type J (opt.) | Type V (opt.) |
|--------|--------------|-------------------|---------------|---------------|
| F12-30 | Ø30          | Ø25 <sup>3)</sup> | -             | 32-3          |
| -40    | Ø30          | -                 | Ø35           | 38-3          |
| -60    | Ø35          | -                 | -             | 44-3          |
| -80    | Ø40          | -                 | -             | -             |
| -90    | Ø40          | -                 | -             | -             |
| -110   | Ø45          | -                 | -             | 44-3          |
| -125   | Ø45          | -                 | -             | 44-3          |


- 1) Spline shaft type D
- 2) Spline shaft type Z
- 3) Max operating pressure 350 bar

**F12-30, -40, -60, -80, -90, -110 and -125**







(Cartridge versions)

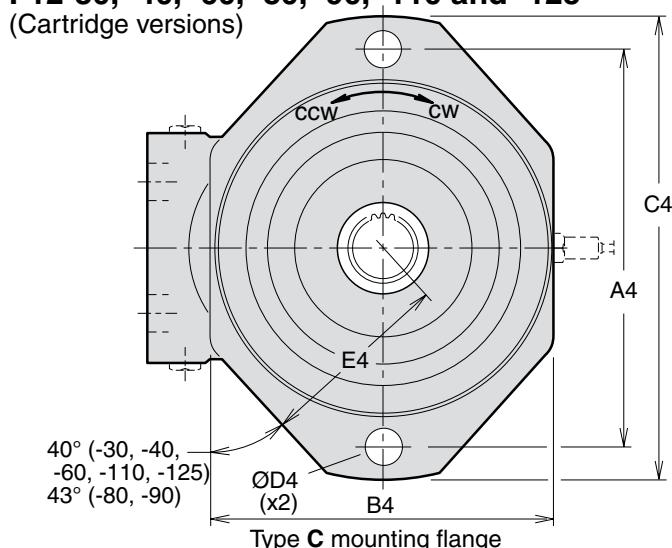

F12-80 shown

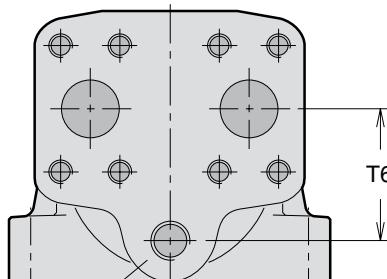

Port E (third drain port)  
F12-110 and -125 barrel housing  
(ISO /cartridge version)

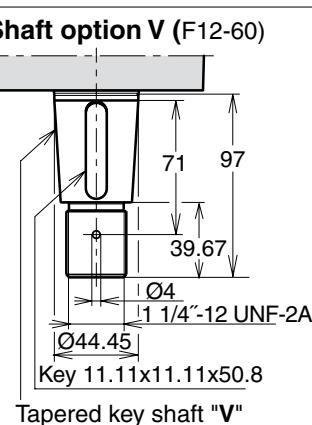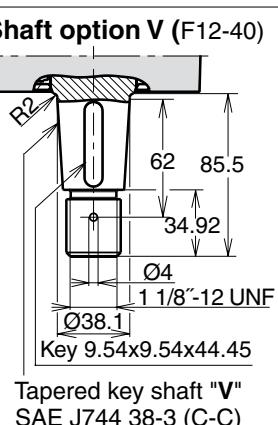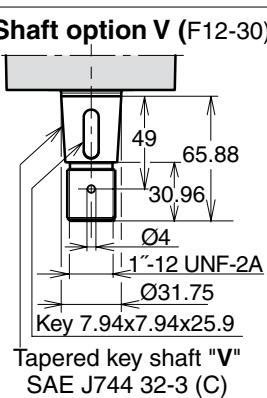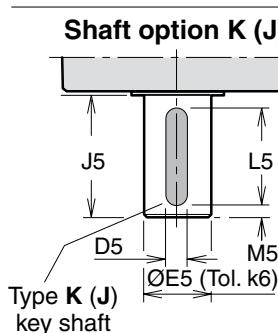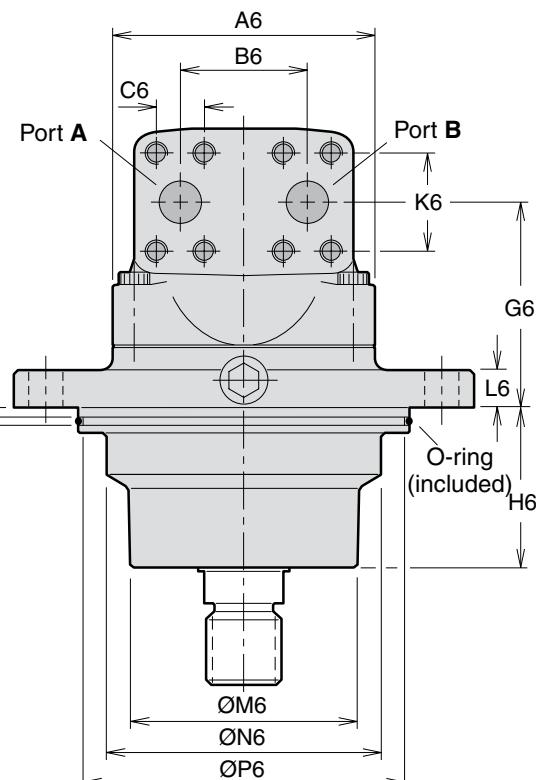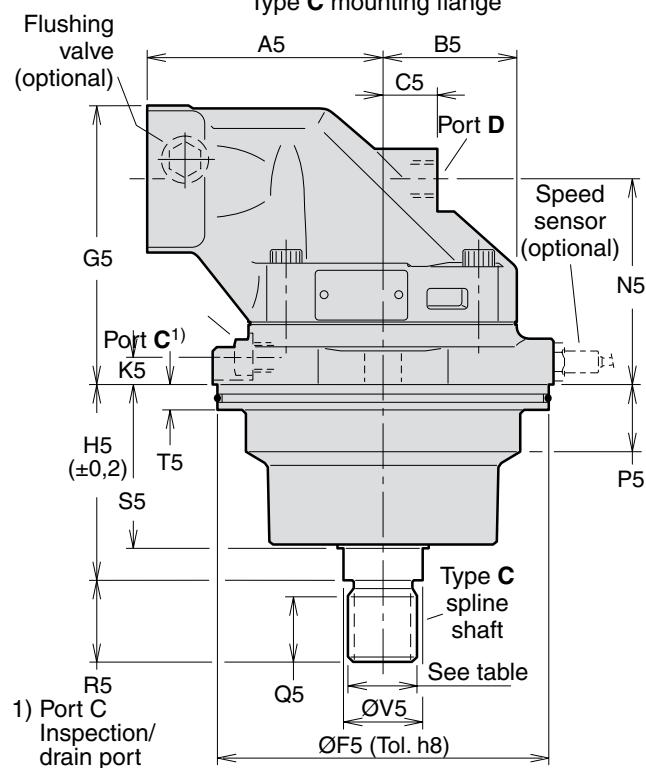

| Dim. | F12-30 | F12-40                               | F12-60 | F12-80<br>F12-90 | F12-110<br>F12-125 |
|------|--------|--------------------------------------|--------|------------------|--------------------|
| A4   | 160    | 200                                  | 200    | 224              | 250                |
| B4   | 140    | 164                                  | 164    | 196              | 206                |
| C4   | 188    | 235                                  | 235    | 260              | 286                |
| D4   | 14     | 18                                   | 18     | 22               | 22                 |
| E4   | 77     | 95                                   | 95     | 110              | 116                |
| A5   | 100    | 110                                  | 125    | 135              | 145                |
| B5   | 59     | 65                                   | 70     | 77.5             | 85                 |
| C5   | 25     | 26                                   | 22     | 32               | 38                 |
| D5   | 8      | 8 <sup>1)</sup><br>10 <sup>2)</sup>  | 10     | 12               | 14                 |
| E5   | 30     | 30 <sup>1)</sup><br>35 <sup>2)</sup> | 35     | 40               | 45                 |
| F5   | 135    | 160                                  | 160    | 190              | 200                |
| G5   | 127    | 133                                  | 146    | 157              | 175                |
| H5   | 89     | 92.3                                 | 92.3   | 110.5            | 122.8              |
| J5   | 50     | 60                                   | 60     | 70               | 82                 |
| K5   | 14     | 16                                   | 15     | 15               | 15                 |
| L5   | 40     | 50                                   | 50     | 56               | 70                 |
| M5   | 5      | 5                                    | 5      | 7                | 6                  |
| N5   | 91     | 97                                   | 110    | 114              | 123                |
| P5   | 22     | 30                                   | 31     | 40               | 40                 |
| Q5   | 28     | 28                                   | 28     | 37               | 37                 |
| R5   | 35     | 35                                   | 35     | 45               | 45                 |
| S5   | 70.5   | 72                                   | 76     | 91               | 95.7               |
| T5   | 15     | 15                                   | 15     | 15               | 15                 |
| V5   | 32     | 35                                   | 35     | 45               | 45                 |
| A6   | 122    | 134                                  | 144    | 155              | 170                |
| B6   | 66     | 66                                   | 66     | 75               | 83                 |
| C6   | 23.8   | 23.8                                 | 23.8   | 27.8             | 31.8               |
| G6   | 91.5   | 97                                   | 110    | 114              | 123                |
| H6   | 69.5   | 71                                   | 74     | 89.5             | 93.7               |
| K6   | 50.8   | 50.8                                 | 50.8   | 57.2             | 66.7               |
| L6   | 16     | 18                                   | 18     | 20               | 20                 |
| M6   | 92     | 115                                  | 115    | 130              | 140                |
| N6   | 110    | 127                                  | 135    | 154              | 160                |
| P6   | 128.2  | 153.2                                | 153.2  | 183.2            | 193.2              |
| Q6   | 5      | 5                                    | 5      | 5                | 5                  |
| R6   | 5      | 5                                    | 5      | 5                | 5                  |
| T6   | -      | -                                    | -      | -                | 68                 |

- 1) Key shaft type **K**
- 2) Key shaft type **J** (opt.).

| Ports           | F12-30      | F12-40      | F12-60      | F12-80<br>F12-90 | F12-110<br>F12-125 |
|-----------------|-------------|-------------|-------------|------------------|--------------------|
| A, B<br>size    | 3/4"        | 3/4"        | 3/4"        | 1"               | 1 1/4"             |
| Screw<br>thread | M10<br>x20  | M10<br>x20  | M10<br>x20  | M12<br>x22       | M14<br>x26         |
| C<br>thread     | M14<br>x1.5 | M14<br>x1.5 | M14<br>x1.5 | M14<br>x1.5      | M14<br>x1.5        |
| D, E<br>thread  | M18<br>x1.5 | M18<br>x1.5 | M22<br>x1.5 | M22<br>x1.5      | M22<br>x1.5        |

A, B: ISO 6162

3

#### Spline shaft (DIN 5480)

|        | Type C (standard) | Type B (optional) |
|--------|-------------------|-------------------|
| F12-30 | W30x2x14x9g       | -                 |
| -40    | W30x2x14x9g       | -                 |
| -60    | W30x2x14x9g       | W35x2x16x9g       |
| -80    | W40x2x18x9g       | -                 |
| -90    | W40x2x18x9g       | -                 |
| -110   | W40x2x18x9g       | W45x2x21x9g       |
| -125   | W40x2x18x9g       | W45x2x21x9g       |


#### Key shaft

|        | Type K (std) | Type J (opt.) | Type V (opt.) |
|--------|--------------|---------------|---------------|
| F12-30 | Ø30          | -             | 32-3          |
| -40    | Ø30          | Ø35           | 38-3          |
| -60    | Ø35          | -             | 44-3          |
| -80    | Ø40          | -             | -             |
| -90    | Ø40          | -             | -             |
| -110   | Ø45          | -             | 44-3          |
| -125   | Ø45          | -             | 44-3          |


#### O-ring dimensions

|        |       |
|--------|-------|
| F12-30 | 127x4 |
| -40    | 150x4 |
| -60    | 150x4 |
| -80    | 180x4 |
| -90    | 180x4 |
| -110   | 190x4 |
| -125   | 190x4 |


**F12-30, -40, -60, -80, -90, -110 and -125**  
(SAE versions with 4 bolt flange)

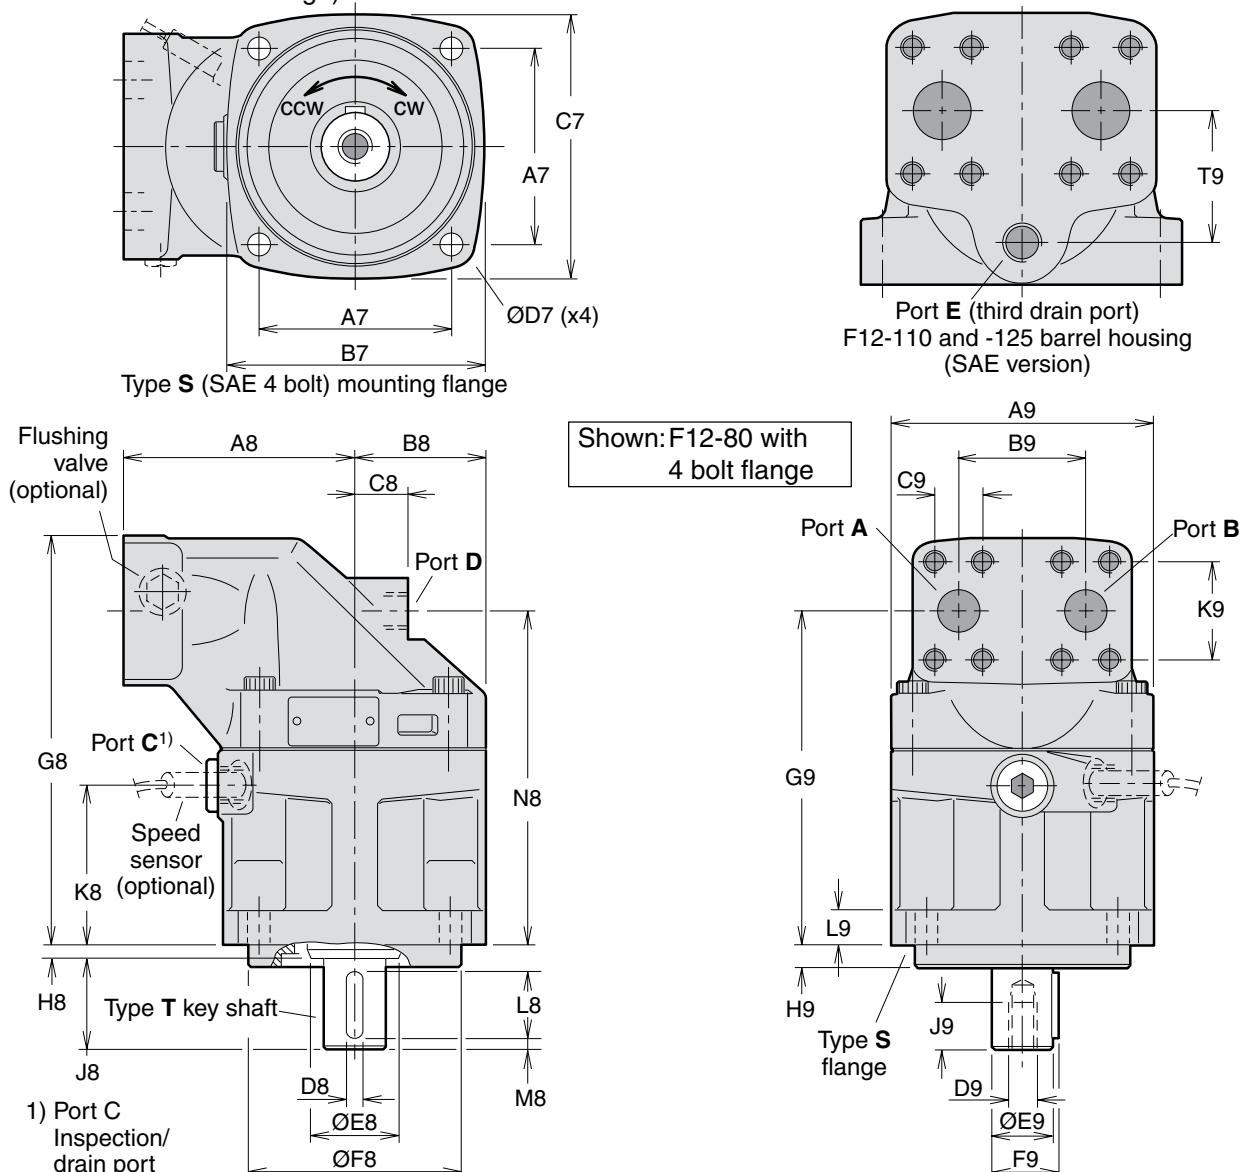


**Shaft option S (U)**

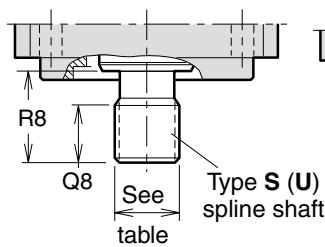


**Shaft option V (F12-30)**

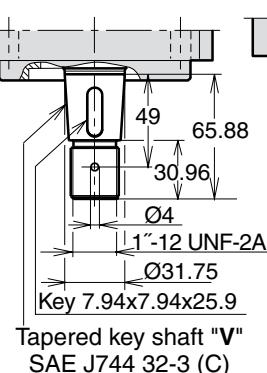

**Shaft option V (F12-40)**

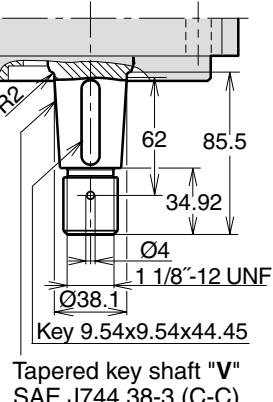

**Shaft option V (F12-60)**

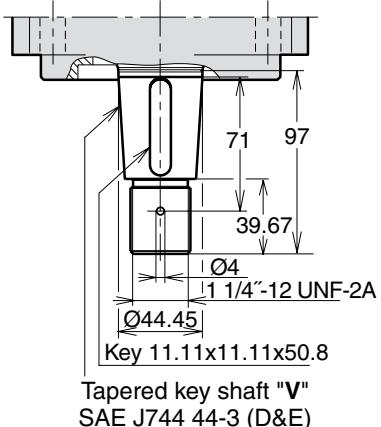

| Dim.             | F12-30            | F12-40            | F12-60            | F12-80<br>F12-90  | F12-110<br>F12-125 |
|------------------|-------------------|-------------------|-------------------|-------------------|--------------------|
| A7               | 89.8              | 114.5             | 114.5             | 114.5             | 161.6              |
| B7               | 118               | 148               | 148               | 155               | 204                |
| C7               | 118               | 144               | 144               | 155               | 200                |
| D7               | 14                | 14                | 14                | 14                | 21                 |
| A8               | 100               | 110               | 125               | 135               | 145                |
| B8               | 59                | 65                | 70                | 77.5              | 85                 |
| C8               | 25                | 26                | 22                | 32                | 38                 |
| D8               | 6.35              | 7.94              | 7.94              | 9.53              | 11.1               |
| E8               | 33                | 42                | 42                | 52                | 57.5               |
| F8               | 101.60/<br>101.55 | 127.00/<br>126.94 | 127.00/<br>126.94 | 127.00/<br>126.94 | 152.40/<br>152.34  |
| G8               | 189.5             | 197               | 214               | 240               | 264                |
| H8               | 8                 | 8                 | 8                 | 8                 | 8                  |
| J8               | 38                | 48                | 48                | 54                | 67                 |
| K8               | 72                | 76                | 79                | 95                | 99                 |
| L8               | 31.8              | 38.1              | 38.1              | 44.5              | 54.1               |
| M8               | 2.5               | 4                 | 4                 | 4                 | 7.5                |
| N8               | 153.5             | 161               | 178.3             | 197.1             | 212                |
| Q8 <sup>1)</sup> | 23                | 23                | 23                | 25                | 34                 |
| Q8 <sup>2)</sup> | -                 | -                 | -                 | 23                | -                  |
| R8 <sup>1)</sup> | 33                | 48                | 48                | 54                | 66.7               |
| R8 <sup>2)</sup> | -                 | -                 | -                 | 48                | -                  |
| A9               | 122               | 134               | 144               | 155               | 170                |
| B9               | 66                | 66                | 66                | 75                | 83                 |
| C9               | 23.8              | 23.8              | 23.8              | 27.8              | 31.8               |
| D9*              | 5/16"-24          | 3/8"-24           | 3/8"-24           | 1/2"-20           | 5/8"-18            |
| E9               | 25.40/<br>25.35   | 31.75/<br>31.70   | 31.75/<br>31.70   | 38.10/<br>42.3    | 44.45/<br>49.4     |
| F9               | 28.2              | 35.3              | 35.3              | 42.3              | 49.4               |
| G9               | 153.8             | 161               | 178.3             | 197.1             | 212                |
| H9               | 9.7               | 12.7              | 12.7              | 12.7              | 12.7               |
| J9               | 16                | 19                | 19                | 26                | 32                 |
| K9               | 50.8              | 50.8              | 50.8              | 57.2              | 66.7               |
| L9               | 18                | 20                | 20                | 20                | 22                 |
| T9               | -                 | -                 | -                 | -                 | 68                 |

\* UNF-2B thread

1)Spline shaft type **S**

2)Spline shaft type **U**

3)Max operating pressure 350 bar

| Main ports A and B, type <b>U</b> (optional) |                               |
|--|-------------------------------|
| F12-30                                       | 1 1/16" - 12 UN <sup>3)</sup> |
| F12-40                                       | 1 5/16" - 12 UN <sup>3)</sup> |
| F12-60                                       | 1 5/16" - 12 UN <sup>3)</sup> |
| F12-80                                       | 1 5/16" - 12 UN <sup>3)</sup> |
| F12-90                                       | 1 5/16" - 12 UN <sup>3)</sup> |
| F12-110                                      | 1 5/8" - 12 UN <sup>3)</sup>  |
| F12-125                                      | 1 5/8" - 12 UN <sup>3)</sup>  |

| Ports                          | F12-30         | F12-40         | F12-60         | F12-80<br>F12-90 | F12-110<br>F12-125 |
|--------------------------------|----------------|----------------|----------------|------------------|--------------------|
| A, B size                      | 3/4"           | 3/4"           | 3/4"           | 1"               | 1 1/4"             |
| Screw<br>thread <sup>**)</sup> | 3/8"-16<br>x22 | 3/8"-16<br>x20 | 3/8"-16<br>x22 | 7/16"-14<br>x27  | 1/2"-13<br>x25     |
| C thread                       | 7/8"-14        | 7/8"-14        | 7/8"-14        | 7/8"-14          | 1 1/16"-12         |
| D thread                       | 3/4"-16        | 3/4"-16        | 7/8"-14        | 7/8"-14          | 1 1/16"-12         |
| E thread                       | -              | -              | -              | -                | 1 1/16"-12         |

A, B: ISO 6162 C, D, E: O-ring boss (SAE J514)

\*\*) UN thread x depth in mm.

#### Mounting flange (SAE J744)

|        | S (standard)    | R (optional)    |
|--------|-----------------|-----------------|
| F12-30 | SAE 'B', 4 bolt | -               |
| -40    | SAE 'C', 4 bolt | -               |
| -60    | SAE 'C', 4 bolt | -               |
| -80    | SAE 'C', 4 bolt | SAE 'D', 4 bolt |
| -90    | SAE 'C', 4 bolt | SAE 'D', 4 bolt |
| -110   | SAE 'D', 4 bolt | -               |
| -125   | SAE 'D', 4 bolt | -               |

#### Spline shaft (SAE J498b, class 1, flat root, side fit)


|        | S (standard)               | U (opt.)                             | F (optional)            |
|--------|----------------------------|--------------------------------------|-------------------------|
| F12-30 | SAE 'B'<br>13T, 16/32 DP   | -                                    | -                       |
| -40    | SAE 'C' 14T,<br>12/24 DP   | -                                    | -                       |
| -60    | SAE 'C' 14T,<br>12/24 DP   | -                                    | -                       |
| -80    | SAE 'C-C'<br>17T, 12/24 DP | SAE 'C'<br>14T,12/24DP <sup>3)</sup> | SAE 'D'<br>13T, 8/16 DP |
| -90    | SAE 'C-C'<br>17T, 12/24 DP | SAE 'C'<br>14T,12/24DP <sup>3)</sup> | SAE 'D'<br>13T, 8/16 DP |
| -110   | SAE 'D'<br>13T, 8/16 DP    | -                                    | -                       |
| -125   | SAE 'D'<br>13T, 8/16 DP    | -                                    | -                       |

#### Key shaft (SAE J744)



| F12  | T (standard)                   | R (optional)                  | V (optional) |
|------|--------------------------------|-------------------------------|--------------|
| -30  | SAE 'B-B'<br>(Ø25.4 mm/1")     | -                             | 32-3         |
| -40  | SAE 'C'<br>(Ø31.75 mm/1 1/4")  | -                             | 38-3         |
| -60  | SAE 'C'<br>(Ø31.75 mm/1 1/4")  | -                             | 44-3         |
| -80  | SAE 'C-C'<br>(Ø38.1 mm/1 1/2") | SAE 'D'<br>(Ø44.45 mm/1 3/4") | -            |
| -90  | SAE 'C-C'<br>(Ø38.1 mm/1 1/2") | SAE 'D'<br>(Ø44.45 mm/1 3/4") | -            |
| -110 | SAE 'D'<br>(Ø44.45 mm/1 3/4")  | -                             | 44-3         |
| -125 | SAE 'D'<br>(Ø44.45 mm/1 3/4")  | -                             | 44-3         |

**F12-30, -40, and -60**


(SAE versions with 2 bolt flange)

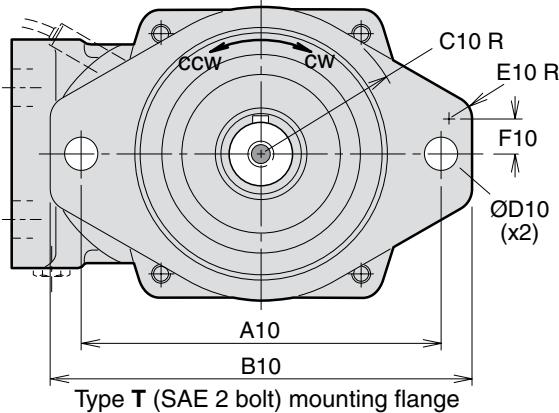


Shown: F12-60 with 2 bolt flange

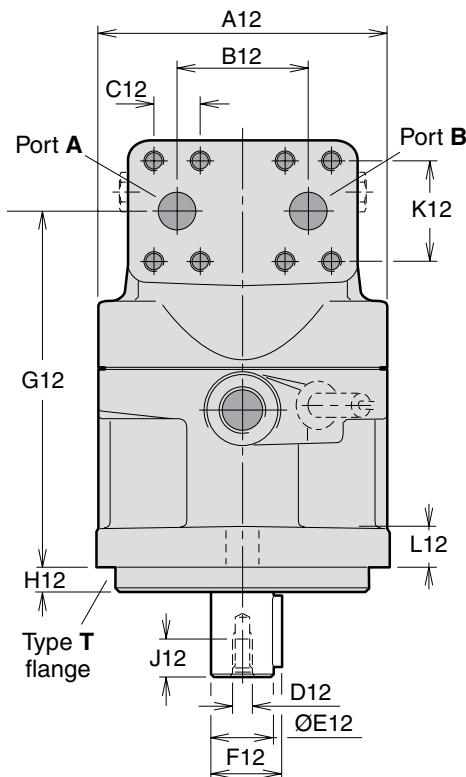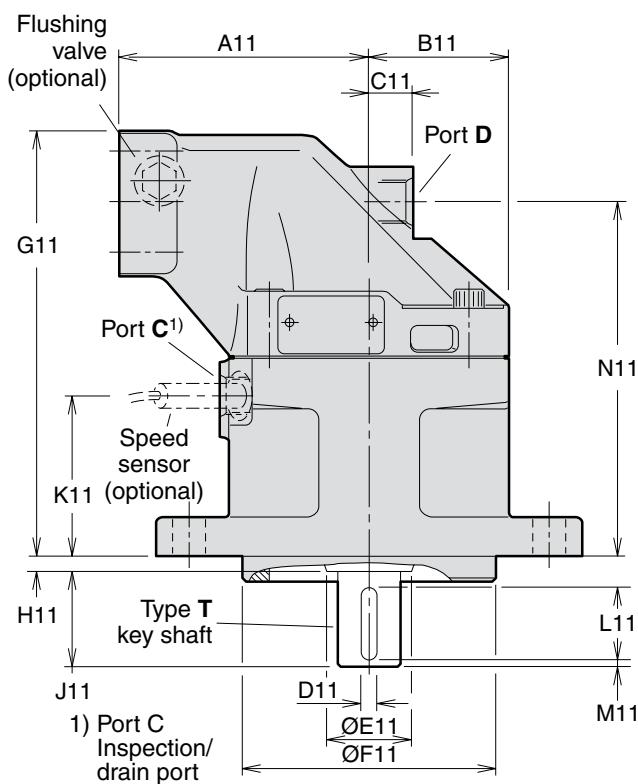


**Shaft option S**

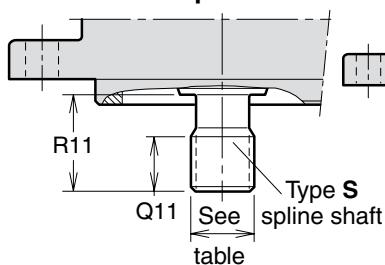


**Shaft option V (F12-30)**

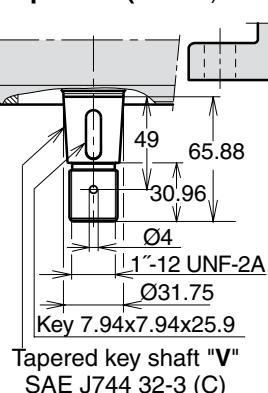

**Shaft option V (F12-40)**

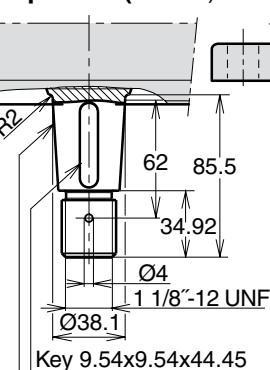

**Shaft option V (F12-60)**

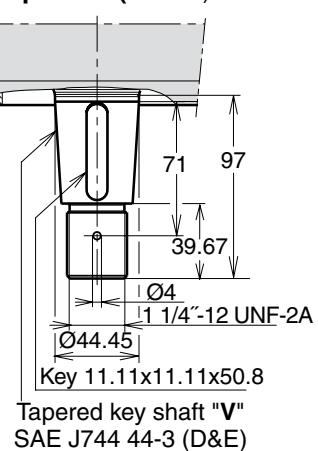

| Dim.              | <b>F12-30</b>     | <b>F12-40</b>     | <b>F12-60</b>     |
|-------------------|-------------------|-------------------|-------------------|
| A10               | 146               | 181               | 181               |
| B10               | 176               | 215               | 215               |
| C10               | 63                | 74                | 74                |
| D10               | 14.4              | 17.5              | 17.5              |
| E10               | 10                | 16                | 16                |
| F10               | 10                | 15.5              | 15.5              |
| A11               | 100               | 110               | 125               |
| B11               | 59                | 65                | 70                |
| C11               | 25                | 26                | 22                |
| D11               | 6.35              | 7.94              | 7.94              |
| E11               | 33                | 42                | 42                |
| F11               | 101.60/<br>101.55 | 127.00/<br>126.95 | 127.00/<br>126.95 |
| G11               | 189.5             | 197               | 214               |
| H11               | 8                 | 8                 | 8                 |
| J11               | 38                | 48                | 48                |
| K11               | 71                | 77                | 81.5              |
| L11               | 31.8              | 38.1              | 38.1              |
| M11               | 2.5               | 4                 | 4                 |
| N11               | 154               | 161               | 178.5             |
| Q11               | 26                | 27                | 27                |
| R11               | 33                | 48                | 48                |
| A12               | 122               | 134               | 144               |
| B12               | 66                | 66                | 66                |
| C12               | 23.8              | 23.8              | 23.8              |
| D12 <sup>1)</sup> | 5/16"-24          | 3/8"-24           | 3/8"-24           |
| E12               | 25.40/<br>25.35   | 31.75/<br>31.70   | 31.75/<br>31.70   |
| F12               | 28.2              | 35.2              | 35.2              |
| G12               | 154               | 161               | 178.5             |
| H12               | 9.7               | 12.7              | 12.7              |
| J12               | 16                | 19                | 19                |
| K12               | 50.8              | 50.8              | 50.8              |
| L12               | 18                | 20                | 20                |

1) UNF-2B thread

6) Max operating pressure 350 bar

| Ports              | <b>F12-30</b>  | <b>F12-40</b>  | <b>F12-60</b>  |
|--------------------|----------------|----------------|----------------|
| A, B size          | 19 (3/4")      | 19 (3/4")      | 19 (3/4")      |
| Screw<br>thread *) | 3/8"-16<br>x22 | 3/8"-16<br>x20 | 3/8"-16<br>x22 |
| C thread           | 3/4"-16        | 3/4"-16        | 7/8"-14        |
| D thread           | 3/4"-16        | 3/4"-16        | 7/8"-14        |

A, B (main ports): SAE J518c (6000 psi)  
C, D (drain ports): O-ring boss (SAE J514)

\*) UN thread

3

| <b>Main ports A and B, type U (optional)</b> |                               |
|--|-------------------------------|
| F12-30                                       | 1 1/16" - 12 UN <sup>6)</sup> |
| -40  | 1 5/16" - 12 UN <sup>6)</sup> |
| -60  | 1 5/16" - 12 UN <sup>6)</sup> |

O-ring ports according to SAE J514d


| <b>Mounting flange T (SAE J744)</b> |                 |
|-------------------------------------|-----------------|
| F12-30                              | SAE 'B', 2 bolt |
| -40                                 | SAE 'C', 2 bolt |
| -60                                 | SAE 'C', 2 bolt |

| <b>Spline shaft S</b><br>(SAE J498b, class 1, flat root, side fit) |                           |
|--|---------------------------|
| F12-30   | SAE 'B'<br>13 T; 16/32 DP |
| -40  | SAE 'C'<br>14 T; 12/24 DP |
| -60  | SAE 'C'<br>14 T; 12/24 DP |





**Key shaft (SAE J744)**

|        | <b>T (Standard)</b>         | <b>V (optional)</b> |
|--------|-----------------------------|---------------------|
| F12-30 | SAE 'B-B'<br>Ø25.4 mm/1"    | 32-3                |
| -40    | SAE 'C'<br>Ø31.75 mm/1 1/4" | 38-3                |
| -60    | SAE 'C'<br>Ø31.75 mm/1 1/4" | 44-3                |


**F12-150**  
(CETOP version)

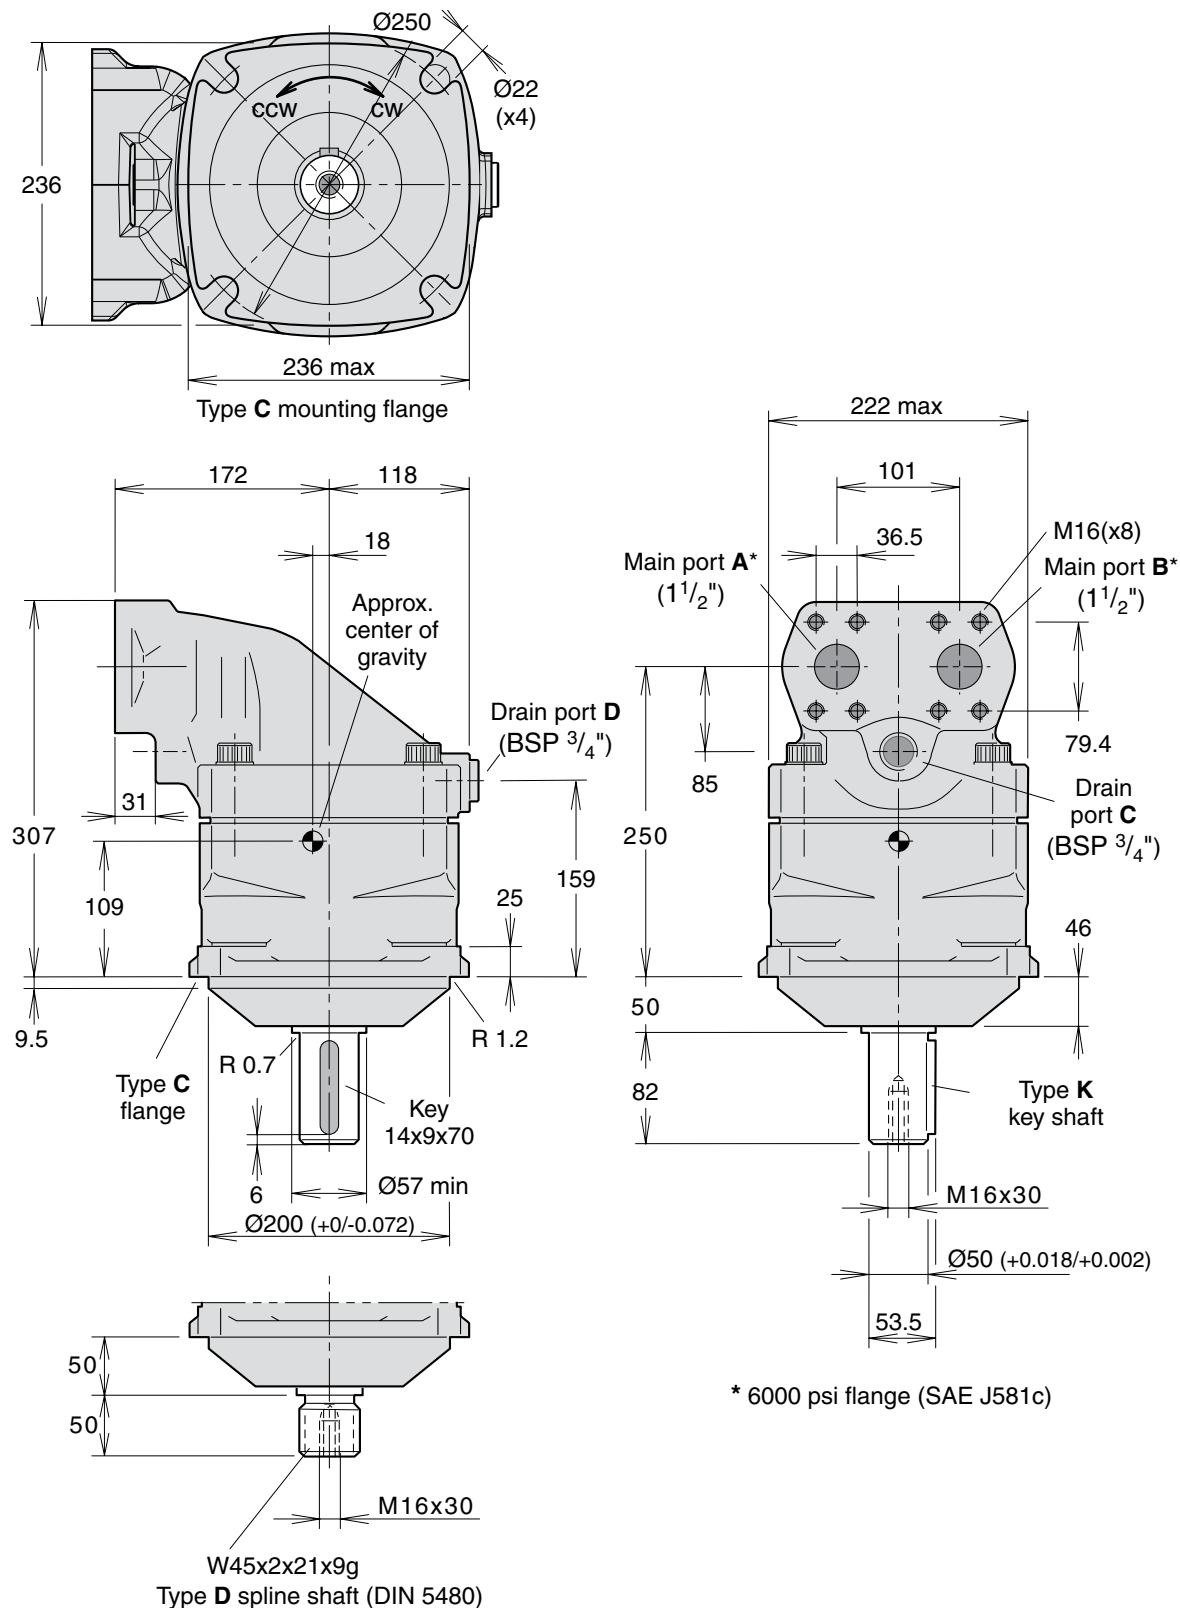



**F12-150**  
(SAE version)

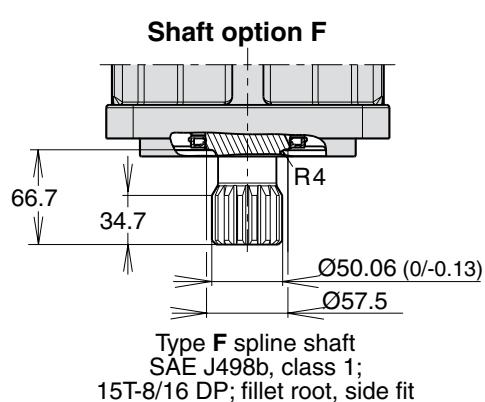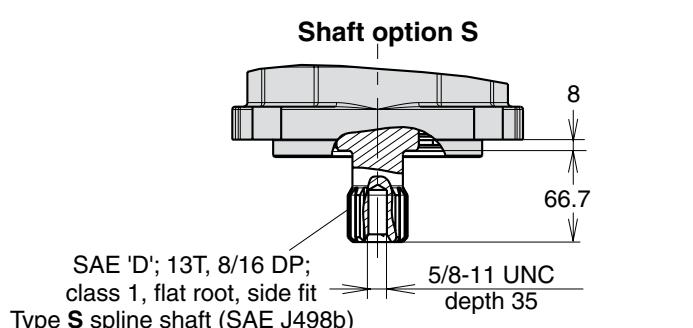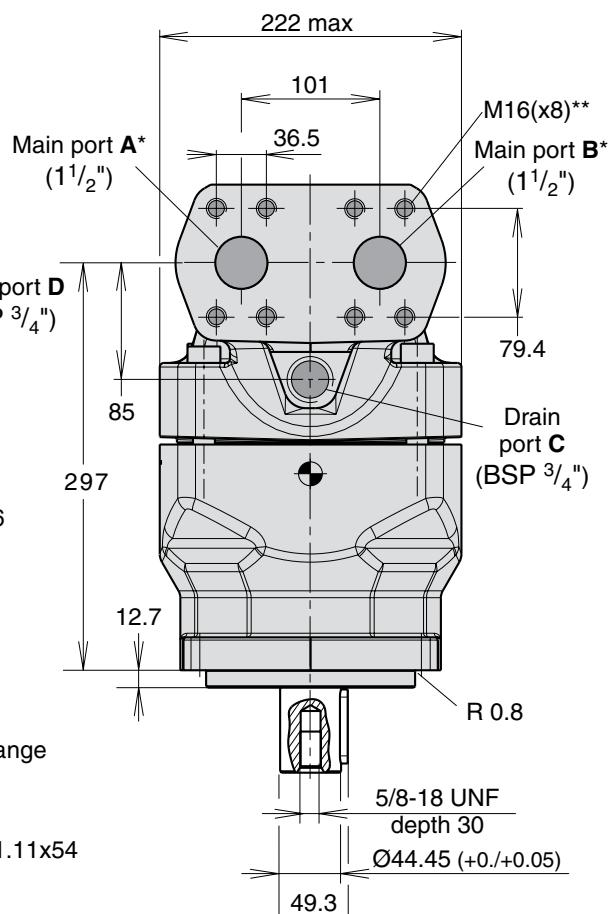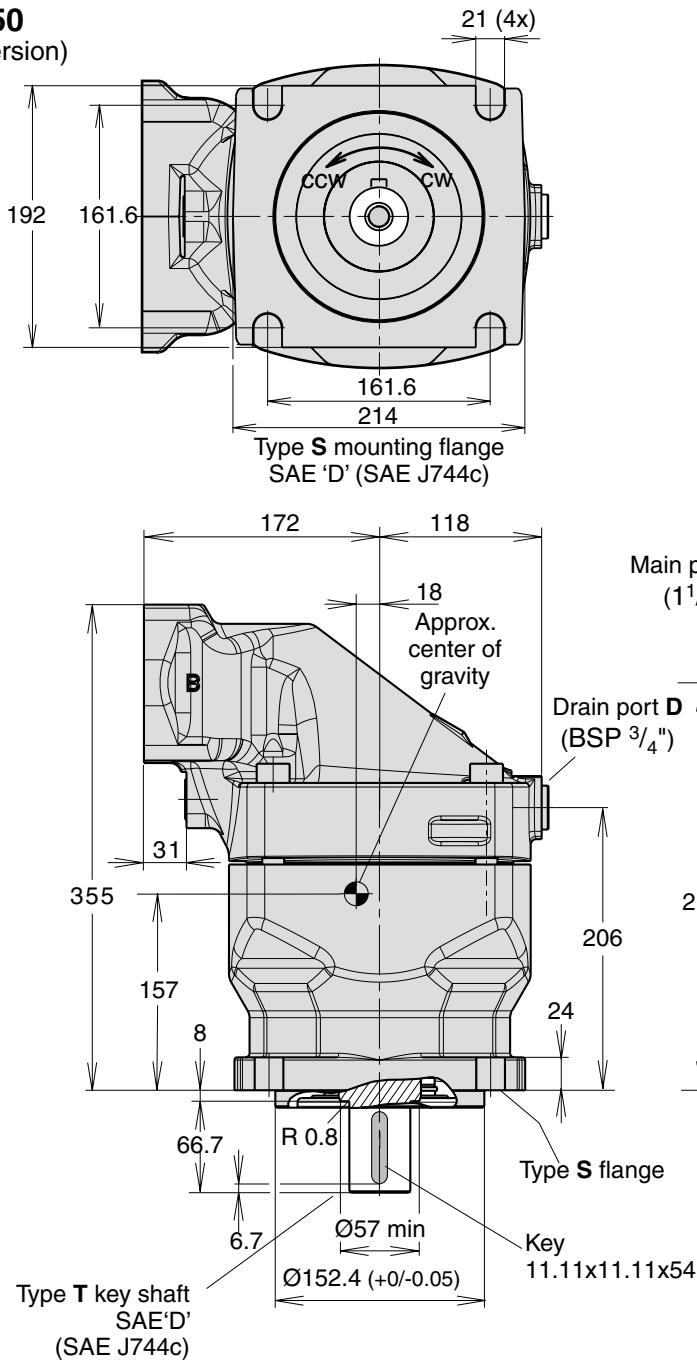

**F12-250**  
(SAE version)

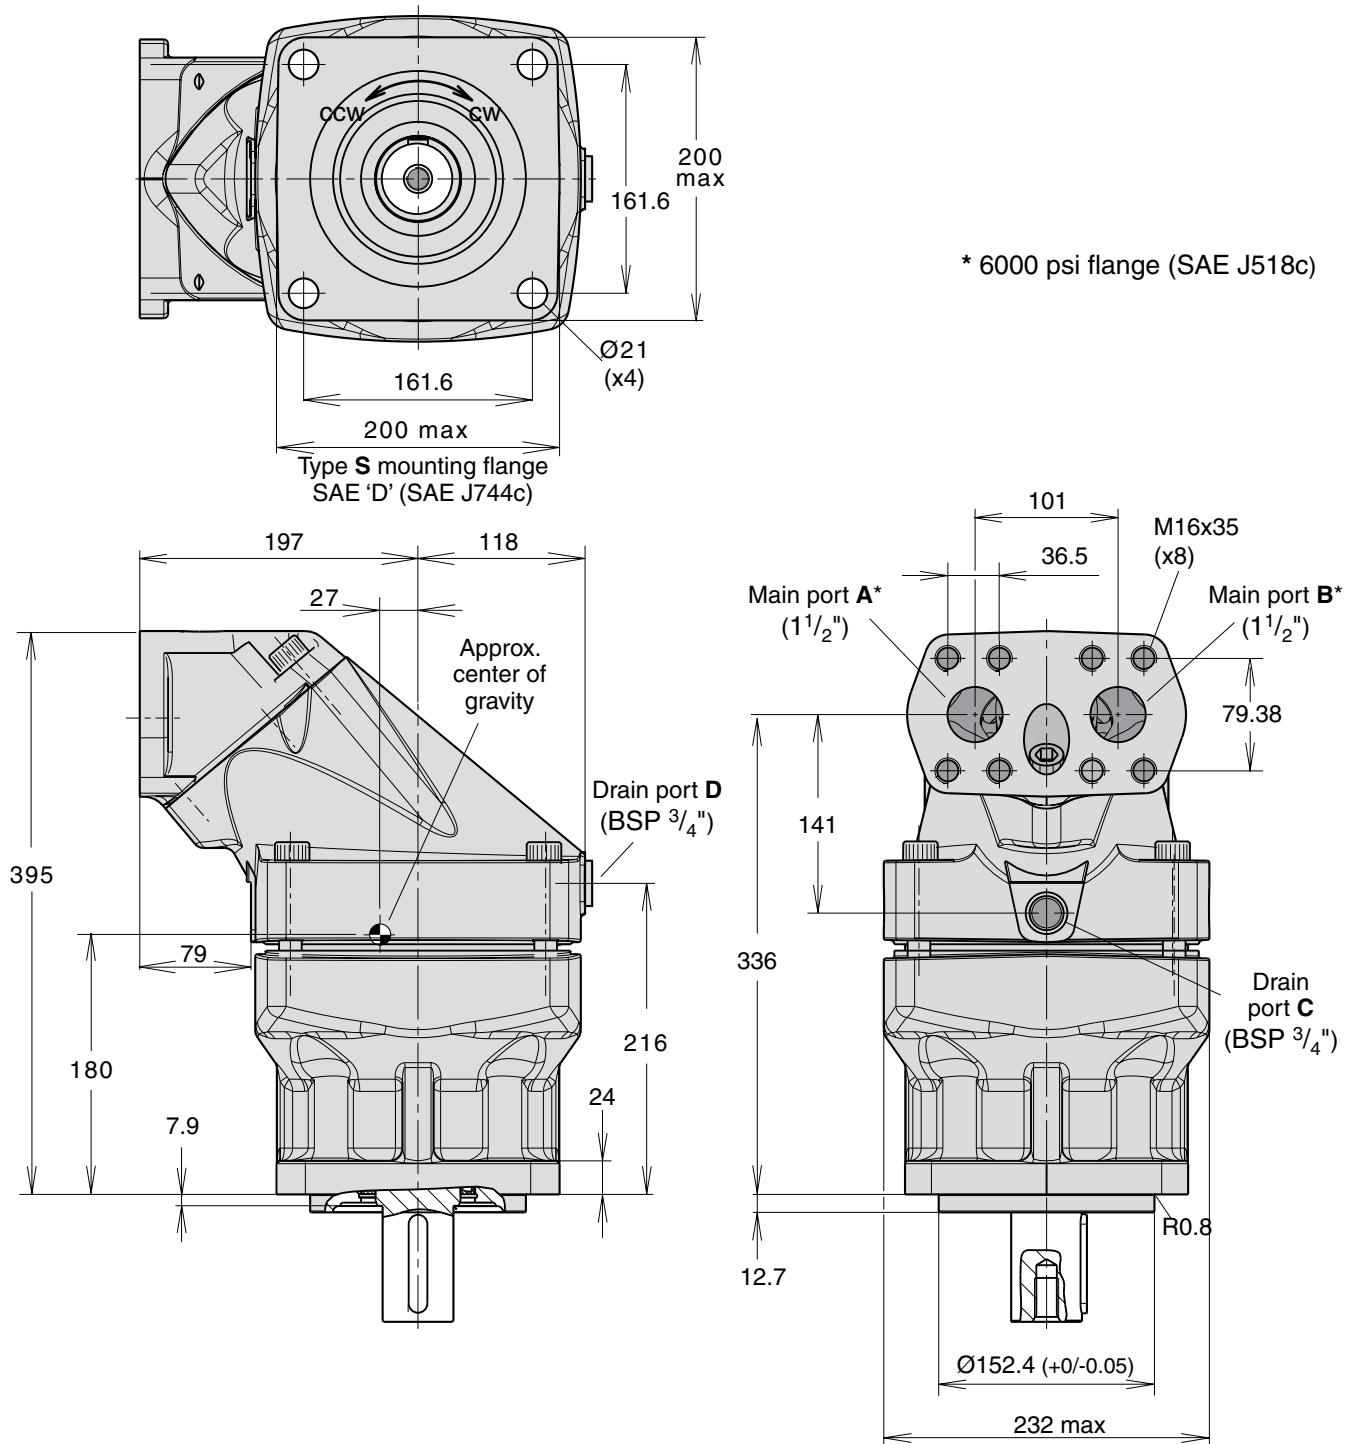


**F12-250 Options (SAE version)**

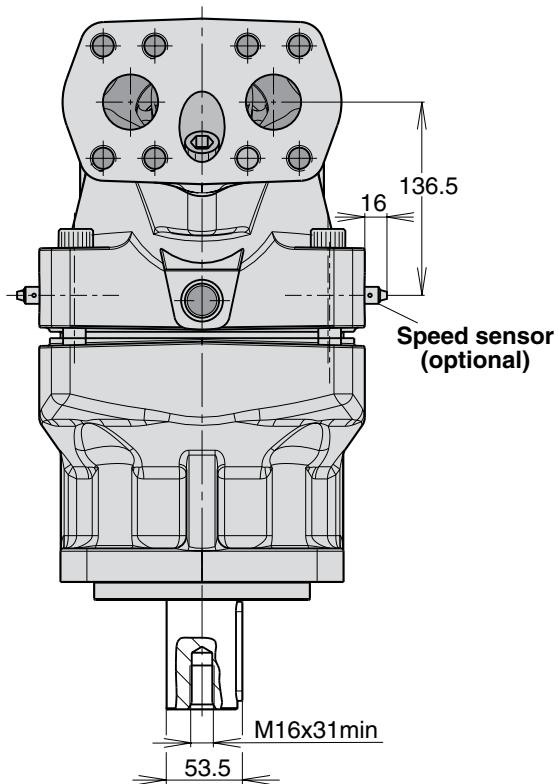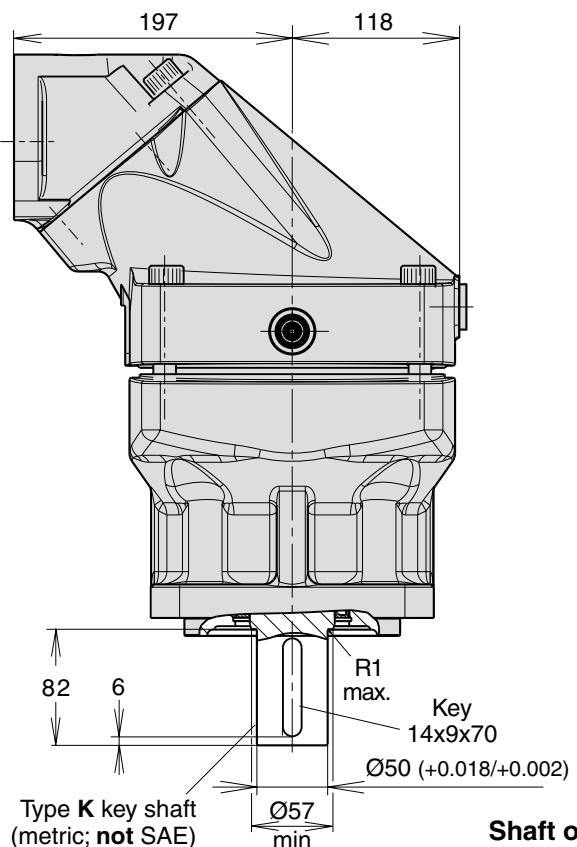


3

**Shaft option T**

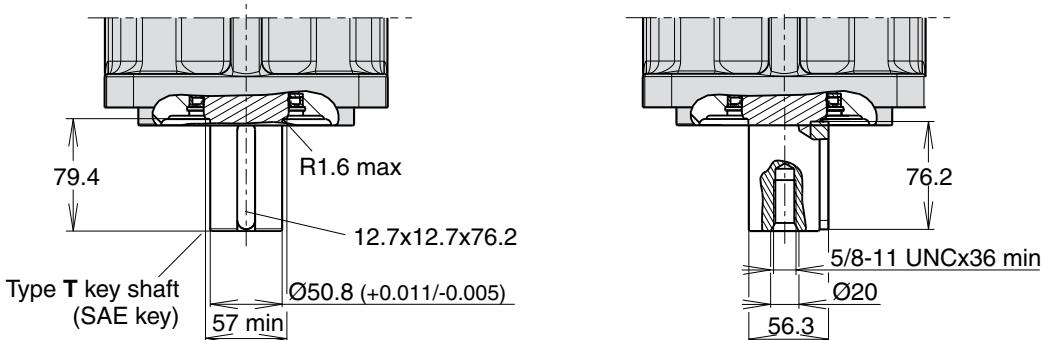


**Shaft option D**

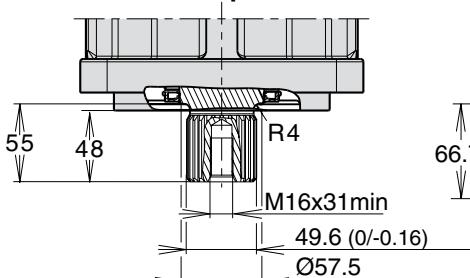


Type D spline shaft  
W50x2x24x9g  
DIN 5480 side fit

**Shaft option F**

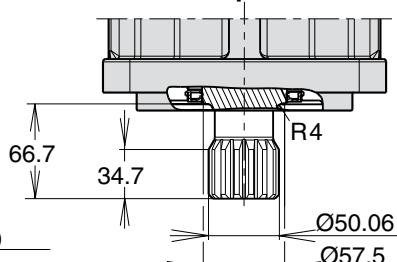

Type F spline shaft  
SAE J498b, class 1;  
15T-8/16 DP;  
fillet root, side fit

**Shaft option S**

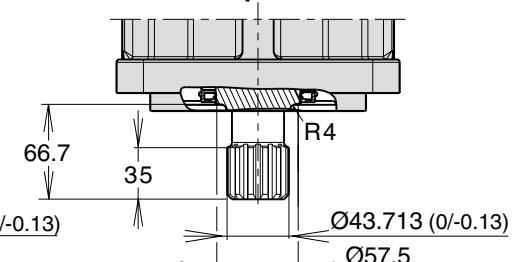

Type S spline shaft  
SAE J498b, class 1;  
30° involute spline;  
13T-8/16 DP;  
flat root, side fit

# Accessories

## Contents

|  | <b>Page</b> |
|--|-------------|
| Flushing valves for F12 motors.....                      | 59          |
| FV13 flushing valve block .....                          | 60          |
| Integrated pressure relief valve .....                   | 61          |
| Possible pressure settings.....                          | 61          |
| SR pressure relief / make-up anti-cavitation valve ..... | 62          |
| Dimensions/ SV pressure relief .....                     | 63          |
| Ordering code.....                                       | 64          |
| Speed sensor .....                                       | 65          |
| BLA, Boost Unit .....                                    | 66          |

## Integrated flushing valve (F12-30, -40, -60, -80, -90)

### General information



The integrated flushing valve supplies the motor with a cooling flow through the case which may be required when operating at high speeds and power levels.

In a closed loop hydrostatic transmission the flushing valve secures that cool fluid from the charge circuit is constantly added to the main circuit.


The flushing valve consists of a 'three-position', three-way spool valve which connects the low pressure side of the main hydraulic circuit with the motor case. The valve opens at a pressure differential between port A and port B of approximately 14 bar.

In order to limit the flow, a nozzle with a orifice is available from Parker Hannifin. The diagram to the right shows flow versus differential pressure.

For general advise when flushing might be needed, see page 67.

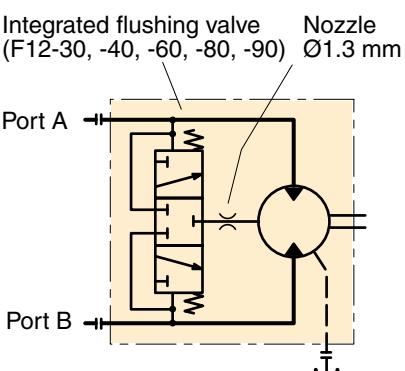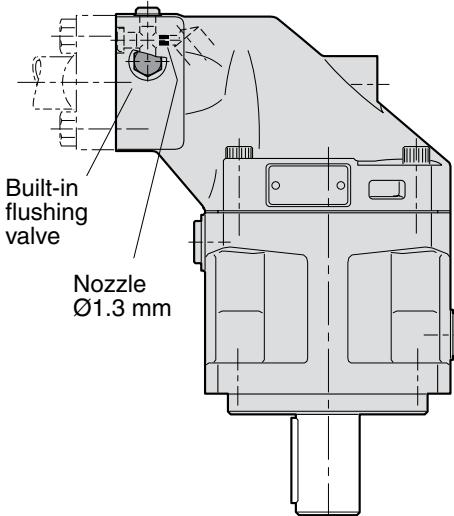

Hydraulic schematic.

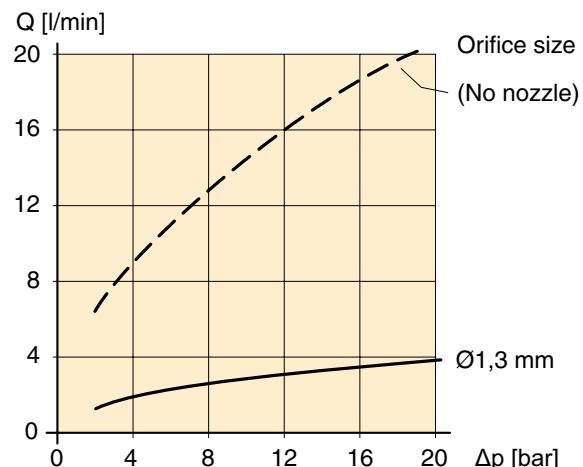

4

### Ordering code

**F12** - **080** - **MF** - **IV** - **K** - **000** - **L130** - **00**

Standard F12 ordering code  
 (for F12-30, -40, -60, -80, -90)

| Code        | Nozzle designation |
|-------------|--------------------|
| <b>L130</b> | <b>1.3 mm</b>      |


Flow versus pressure differential (port A or B to tank).

**NOTE:** FV13 flushing valve block for  
 F12-110 shown on next page.

### FV13 flushing valve block (for F12-110, -125)



The FV13 for the F12-110 / -125 motor has the same function as the integrated flushing valve for the other F12 frame sizes. The valve block mounts between the motor port flange and the split-flange tube/hose connectors utilizing 'long' mounting screws (screw size M14x75 or  $1\frac{1}{2}$ "-13 UNC based on split-flange height as shown below).

The FV13 flushing valve kit contains the required O-rings (shown below) but no screws, split-flanges or tube/hose connectors.

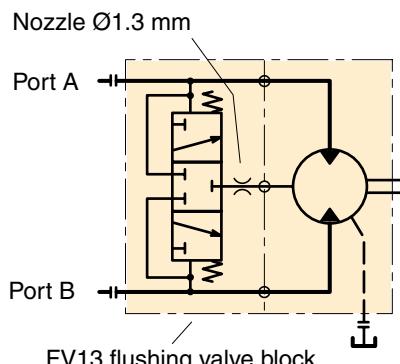

*Hydraulic schematic.*

### FV13 installation

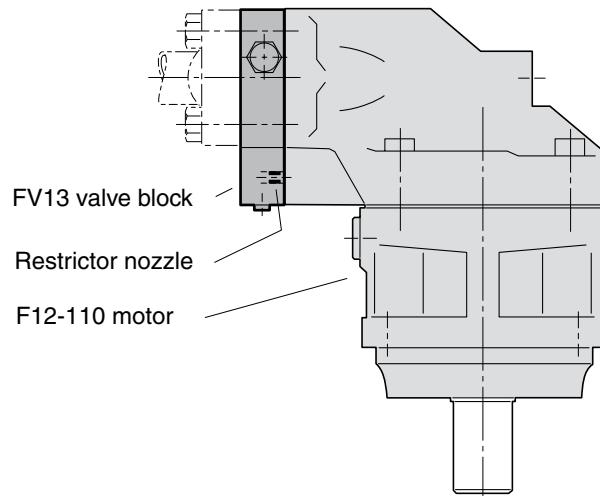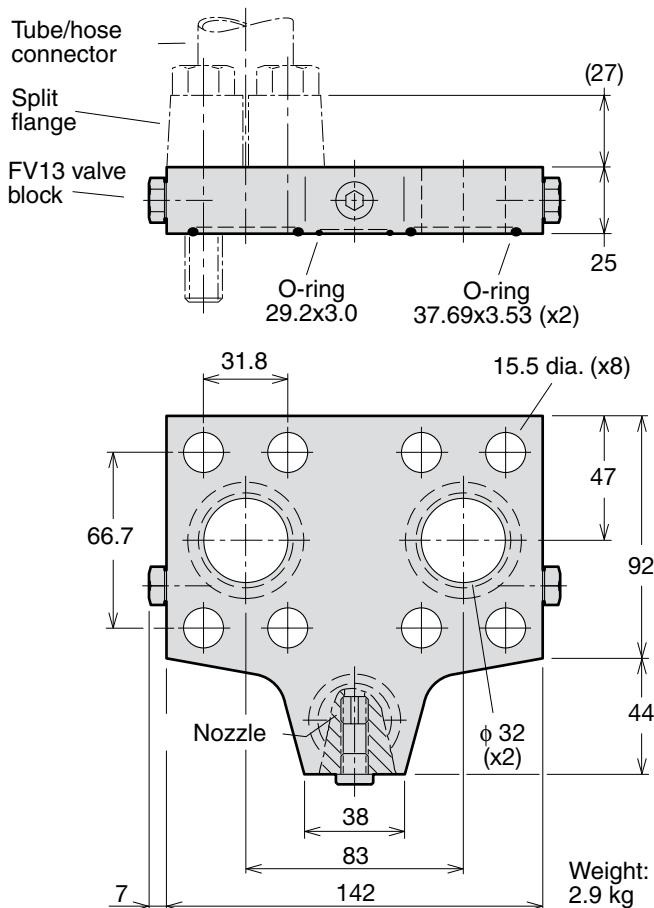

### FV13 Ordering code

|                               |         |      |   |       |   |               |   |                          |
|-------------------------------|---------|------|---|-------|---|---------------|---|--------------------------|
| FV                            | 1       | 3    | - | H     | - | A             | - | L130                     |
| Valve type                    | Version | Size |   | Seals |   | Techn. status |   | Nozzel                   |
| Flushing valve                |         |      |   |       |   |               |   | Code Nozzle L130 Ø1.3 mm |
| Code Version                  |         |      |   |       |   |               |   | Code Techn. status       |
| 1 Factory assigned            |         |      |   |       |   |               |   | A Factory assigned       |
| Code Size (SAE 6000 psi)      |         |      |   |       |   |               |   | Code Seals               |
| 3 1 1/4" (for F12-110 / -125) |         |      |   |       |   |               |   | H Nitrile rubber         |

### FV13 restrictor nozzles

When required, a nozzle is utilized to restrict the flow through the F12-110, -125 motor case. The nozzle installs in the drilled and tapped (M10x1.0) drain line located in the valve block as shown to the left. The diagram on page 59 shows flushing flow versus differential pressure for selected orifice sizes.

The following table lists currently available nozzles and the corresponding FV13 ordering code designation.

| Designation    | Flushing valve Part number | Orifice size [mm] | Orifice Part number |
|----------------|----------------------------|-------------------|---------------------|
| L000 no nozzle | 3780292                    |                   |                     |
| L130 (std.)    | 3795623                    | 1.3               | 379 4413            |

**Integrated pressure relief valve****( F12-030, -040, -060 )**




Integrated pressure relief valves are available for F12-030, F12-040 and F12-060. These are designed to protect the motor from short duration pressure spikes. The motor could be ordered with non-adjustable pressure setting between 210 - 420 bar. The motor has to be ordered as unidirectional, L or R, and this is specified in the ordering code as example below.

F12-030-MS-SV-S-000-P28L-00

P=Pressure relief valve, 28 = 280 bar, L = left

**Possible pressure settings**

| Code | Pressure bar |
|------|--------------|
| 21   | 210          |
| 23   | 230          |
| 25   | 250          |
| 28   | 280          |
| 30   | 300          |
| 33   | 330          |
| 35   | 350          |
| 38   | 380          |
| 40   | 400          |
| 42   | 420          |

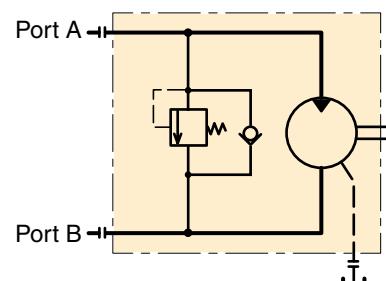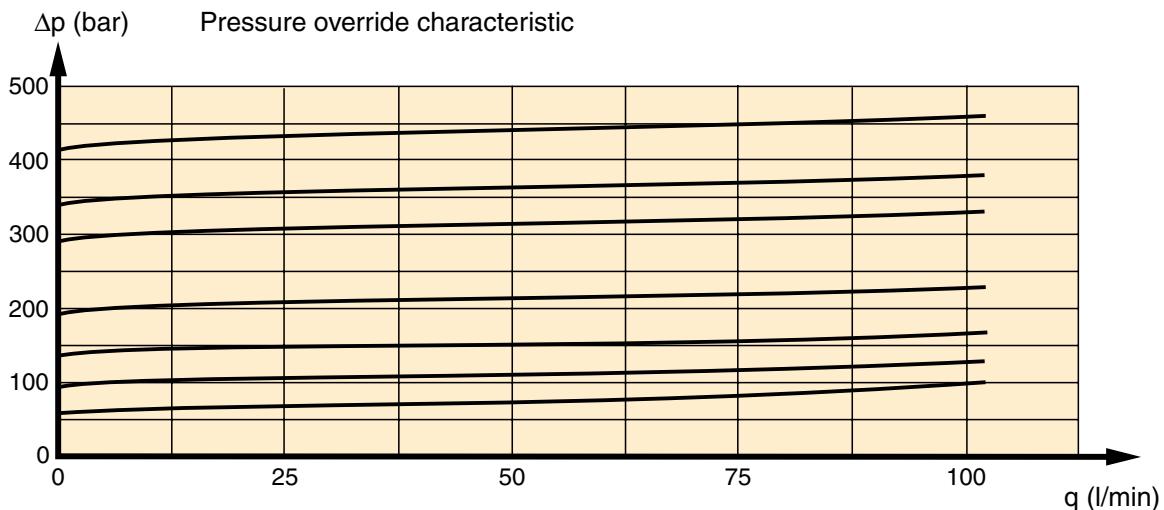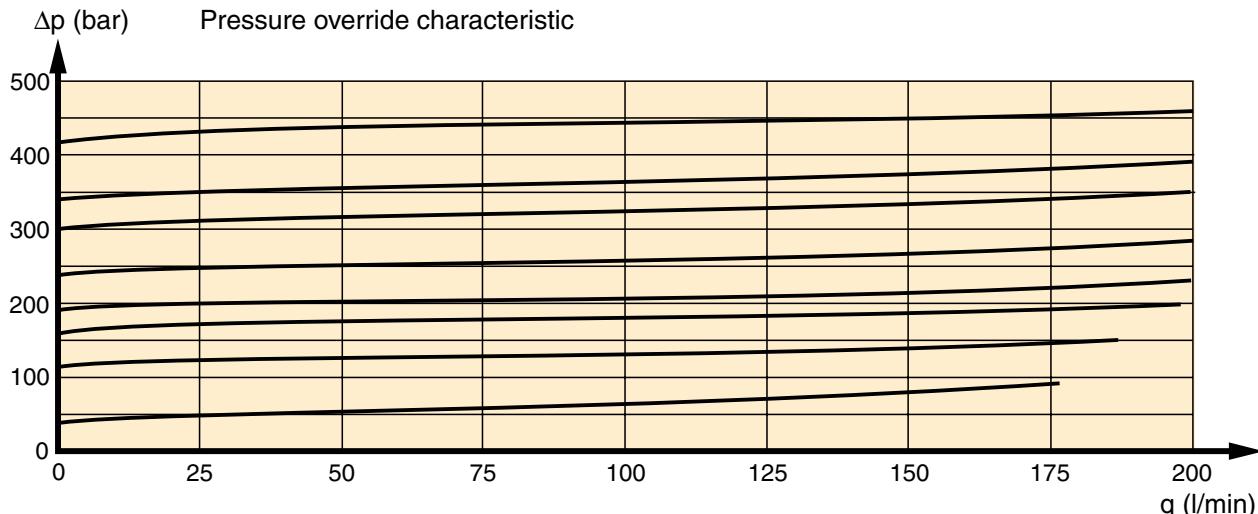**Diagram for PLC082 pressure relief valves integrated in F12-030****Diagram for PLC182 pressure relief valves integrated in F12-040 and F12-060**

## SR pressure relief anti-cavitation valve

The SR pressure relief/make-up valve block for series F12 motors is designed to protect the motor and the main hydraulic lines from short duration pressure spikes. The valve block also provides an excellent make-up function.

The valve block installs directly on the motor port flange, and is available in two sizes:

**1 3/4"** for F12-30/-40/-60

**2 1"** for F12-80, -90

**3 1/4"** for F12-110 , -125


The SR valve block consists of a housing containing two high pressure relief cartridges and two separate check valves for anti-cavitation. Cartridges are available in non-adjustable pressure settings between 280 and 420 bar (*4000 and 6000 psi respectively*).

A make-up port (G) is also provided. In certain operating conditions, the motor (when operating as a pump) may cavitate because of insufficient inlet pressure.


To prevent this, the G port should be pressurized. Contact Parker Hannifin for further information.

The pressure drop through the main ports (A-A' or B-B') is low. As an example, the pressure drop on size 1 ( $3/4"$ ) is 0.45 bar (6.5 psi) at 175 l/min, and on size 2 (1") 0.7 bar (10 psi) at 250 l/min.

**NOTE:** The valve block includes main port O-rings (facing the motor) but no mounting screws.

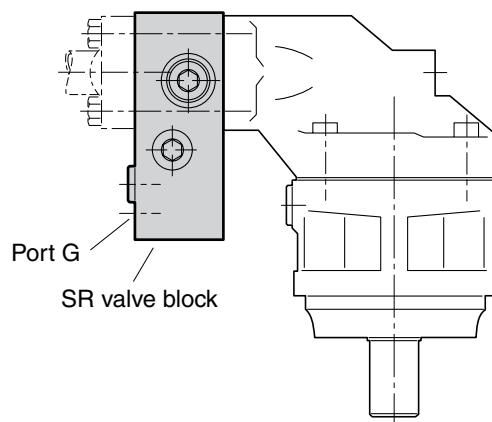


*SR valve block location.*

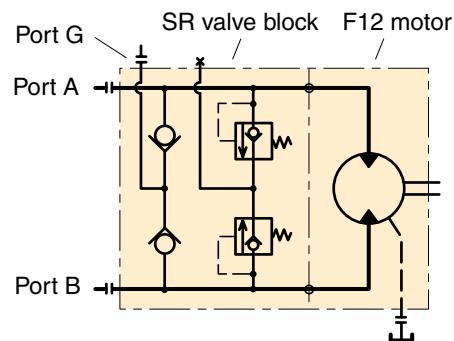

*SR valve block schematic.*

## Ordering code

|                                      |  |           |  |                   |  |               |                         |          |          |               |
|--------------------------------------|--|-----------|--|-------------------|--|---------------|-------------------------|----------|----------|---------------|
| <b>SR</b>                            | <b>1</b>                                   |           |  | <b>I</b>          |  | <b>00</b>     |                         | <b>H</b> | <b>F</b> | <b>A</b>      |
| Valve function                       | Version                                    | Port size |  | Pressure settings |  | Serial number |                         | Seals    | Threads  | Techn. status |
| Pressure relief/ make-up valve block |  |           |  |                   |  |               |                         |          |          |               |
| <b>Code</b>                          | <b>Version</b>                             |           |  |                   |  | <b>Code</b>   | <b>Techn. status</b>    |          |          |               |
| <b>1</b>                             | Factory assigned                           |           |  |                   |  | <b>A</b>      | <b>Factory assigned</b> |          |          |               |
| <b>Code</b>                          | <b>Port size (SAE 6000 psi)</b>            |           |  |                   |  | <b>Code</b>   | <b>Threads (port G)</b> |          |          |               |
| <b>1</b>                             | $3/4"$ for: F12-30, -40, -60               |           |  |                   |  | <b>F</b>      | Metric                  |          |          |               |
| <b>2</b>                             | 1" for: F12-80, -90                        |           |  |                   |  |               |                         |          |          |               |
| <b>3</b>                             | $1\frac{1}{4}"$ for: F12-110 , -125        |           |  |                   |  | <b>Code</b>   | <b>Seals</b>            |          |          |               |
|                                      |  |           |  |                   |  | <b>H</b>      | Nitrile rubber          |          |          |               |
| <b>Code</b>                          | <b>Pressure settings (A/B ports) [bar]</b> |           |  |                   |  | <b>Code</b>   | <b>Serial number</b>    |          |          |               |
|                                      | 280, 300, 330, 350, 380, 400 or 420        |           |  |                   |  | <b>00</b>     | Factory assigned        |          |          |               |

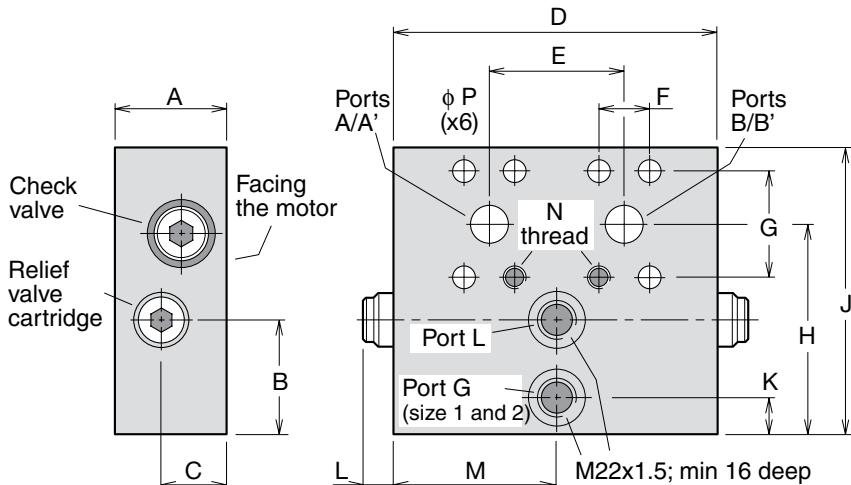**SR pressure relief anti-cavitation valve, Dimensions**

| Dim. [mm] | Size 1 (3/4") | Size 2 (1") | Size 3 (1 1/4") |
|-----------|---------------|-------------|-----------------|
| A         | 55            | 57          | 57              |
| B         | 55            | 55          | 25              |
| C         | 32            | 32          | 26              |
| D         | 157           | 160         | 160             |
| E         | 66            | 75          | 83              |
| F         | 23.8          | 27.8        | 31.8            |
| G         | 50.8          | 57.15       | 66.7            |
| H         | 103           | 109         | 88              |
| J         | 140           | 150         | 135             |
| K         | 18            | 18          | -               |
| L         | 18            | 18          | 18              |
| M         | 78.5          | 80          | -               |
| N         | M10 x18       | M12 x20     | M14 x23         |
| P         | 11            | 13          | 15.5            |

| Weight | Size 1 (3/4") | Size 2 (1") | Size 3 (1 1/4") |
|--------|---------------|-------------|-----------------|
| [kg]   | 7.4           | 9.1         | 8.5             |

**SV pressure relief valve****General information**

The SV pressure relief valve block for series F12 motors is designed to protect the motor and adjacent hydraulic components from short duration pressure peaks.

It installs directly on the motor port flange and is available in two sizes:

'1': 3/4" for F12-30/-40/-60


'2': 1" for F12-80/-90

The valve block consists of a housing containing two high pressure relief cartridges with anti-cavitation function. Cartridges are available in non-adjustable pressure settings between 280 and 420 bar.


A make-up/drain port, L, is also provided. In certain operating conditions the motor may cavitate because of in-sufficient inlet pressure. To prevent this, the L port can be pressurized. When there is a risk of over-heating, the L port can also be utilized to take out part of the flow for cooling. Contact Parker Hannifin for further information.

The pressure drop through the main ports (A-A' or B-B') is low. As an example, the pressure drop on size 1 (3/4") is 0.45 bar (6.5 psi) at 175 l/min (45 gpm), and on size 2 (1") 0.7 bar (10 psi) at 250 l/min (65 gpm).


- NOTE:**
- The valve block includes main port O-rings (facing the motor) but no mounting screws.
  - The valve blocks can be used on all versions of series F12 motors.

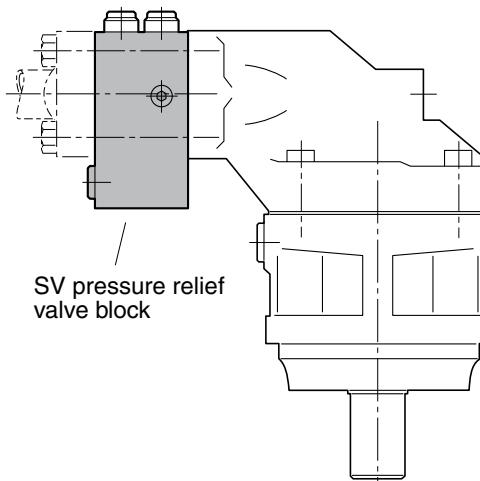


SV valve block installed on an F12 motor.

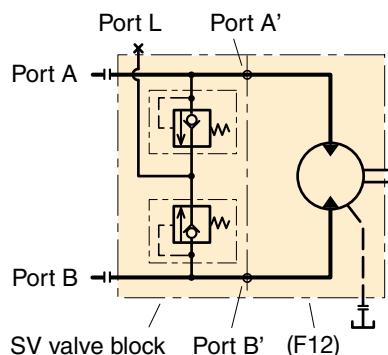

Hydraulic schematic.

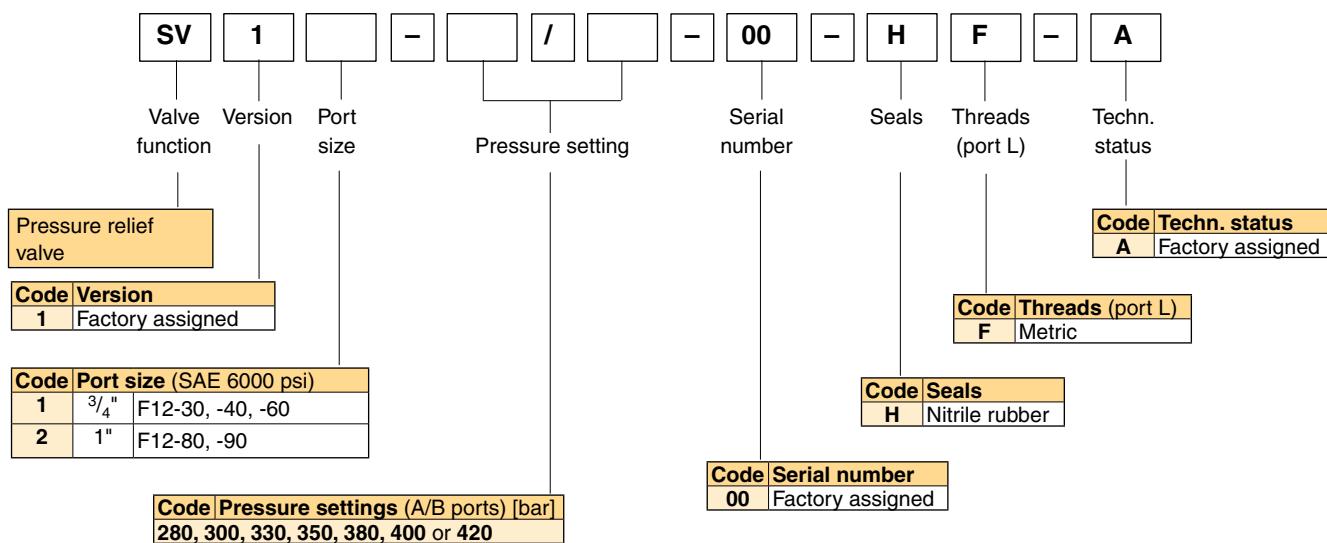

### SV pressure relief valve, Dimensions

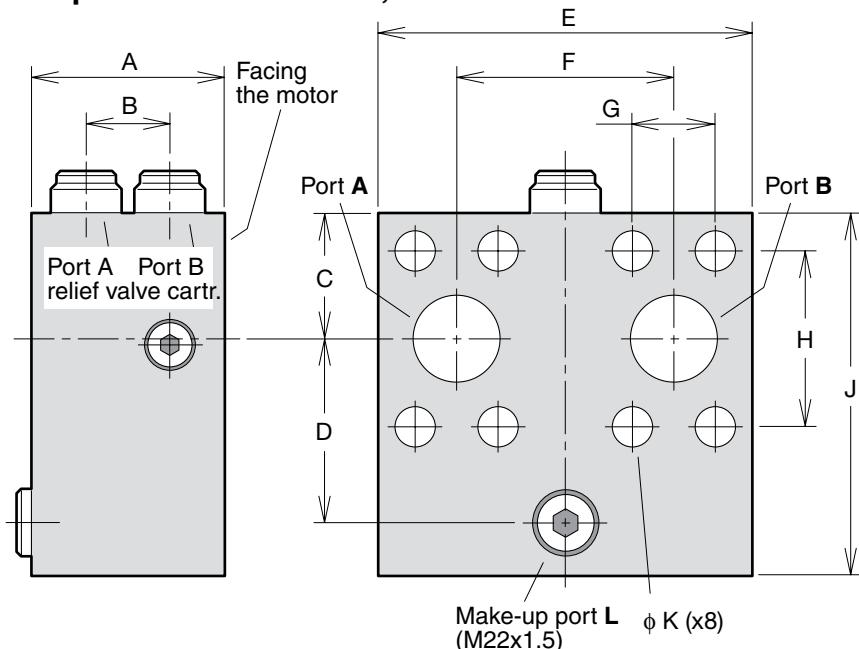


| Dim. [mm]   | SV11 | SV12 |
|-------------|------|------|
| A           | 71   | 73   |
| B           | 31   | 31   |
| C           | 36   | 41   |
| D           | 47   | 51   |
| E           | 130  | 127  |
| F           | 66   | 75   |
| G           | 23.8 | 27.8 |
| H           | 50.8 | 57.2 |
| J           | 99   | 109  |
| K           | 11   | 13   |
| Weight [kg] | 4.2  | 5.0  |


A speed sensor kit is available for series F11/F12. A ferrostat differential (Hall-effect) sensor installs in a separate, threaded hole in the F11/F12 bearing housing.

On F12 the speed sensor is directed towards the ring gear. On F11 the speed sensor is directed towards the pistons. The sensor output is a 2 phase shifted square wave signal within a frequency range of 0 Hz to 15 kHz.

- NOTE:**
- The motor bearing housing must be prepared for the speed pick-up; refer to the F11/F12 ordering codes on pages 12-14(F11) and 43-45 (F12).
  - **On F11 the pistons position must be known before mounting.**
  - Additional information is provided in the marketing information HY30-8301/UK.
  - The speed sensor is also shown in the illustrations on pages 17 to 37 and 46 to 57.
- Part number for Speed sensor is 3785190.

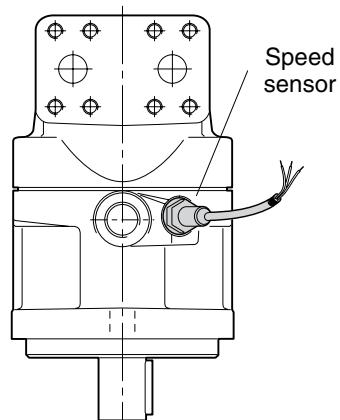

*F12 with speed sensor.*

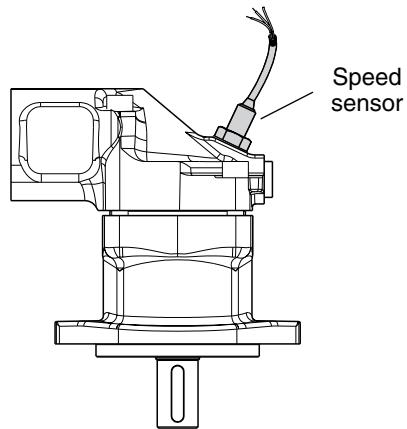

*F11-14 with speed sensor.*

# BLA

## General information

The BLA boost unit simplifies the building of closed or semi-closed hydrostatic transmissions.

### Main features are:

- Replaces conventional charge pump and corresponding valves in many applications
- Allows pump speeds above normal selfpriming speed
- Suitable for system flow rates to 400 l/min
- Includes filter
- Simple construction - no moving/wear parts
- Cost-effective installation
- Small tank size
- Helps in building a low-cost hydrostatic transmission.

## Description

In a closed circuit hydrostatic transmission, a charge pump is normally included with the main pump, providing make-up fluid which replaces pump and motor volumetric losses. It also maintains sufficient pump inlet pressure to avoid cavitation.

The BLA boost unit replaces the charge pump in many applications, when the following conditions are met:

- The max-to-min pump flow ratio does not exceed 2:1
- System pressure changes gradually without frequent and pronounced pressure peaks
- The line length between pump and boost unit is relatively short.

There are two basic sizes of the BLA boost unit:

- BLA 4 (to 160 l/min pump flow)
- BLA 6 (to 400 l/min pump flow).

The main part of the unit is an aluminium housing with a built-in nozzle and an injector; refer to the cross section to the right.

When fluid flows from the motor outlet port through the unit and to the pump inlet port, the increased fluid velocity between the nozzle and injector creates a low pressure zone causing additional fluid to be drawn from tank into the main circuit.

Also, pressure increases after the injector, allowing the pump to be operated at speeds higher than the self-priming speed. The 'boost pressure' increases with flow. The housing includes ports that should be connected to the pump and motor drain ports respectively.

An additional bleed-off nozzle diverts approx. 10% of the main flow through the cartridge filter before being directed to the tank.


## Oil cooling

An oil cooler is usually required in the hydraulic system, in order to remove the heat that is generated in the main circuit. A full-flow oil cooler should be installed in the return line between the motor and the boost unit.

**For more information please see our technical catalogue BLA boost unit HY17-8224/UK**


## Typical applications:

- Fan drives
- Propeller drives
- Generator drives
- Pump drives

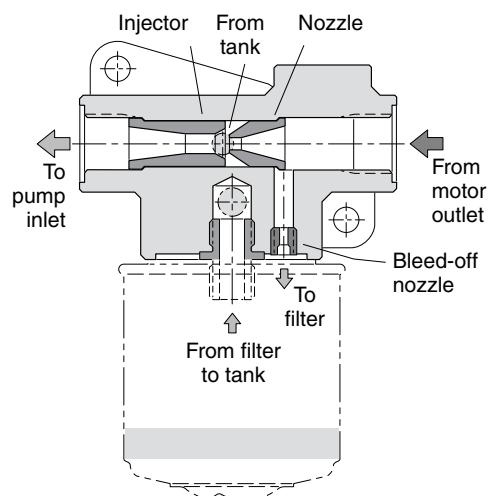

*BLA boost unit cross section.*

## Boost unit installation

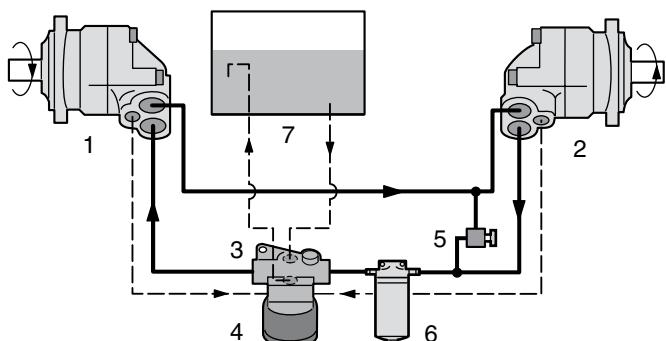

1. Pump
2. Motor
3. Boost unit (with injector and nozzle)
4. Filter cartridge
5. Pressure relief valve
6. Full-flow filter (when required)
7. Reservoir


### Direction of rotation

The motor versions are bi-directional.

The pump versions are uni-directional, allowing higher selfpriming speeds (refer to pages 9, 11 and 40, 42).

The illustration to the right shows direction of flow versus shaft rotation. In a motor application, the shaft turns clockwise when port **B** (black arrow) is pressurized, and counter clockwise when port **A** (open arrow) is pressurized.

In a pump application where the shaft turns clockwise, port **B** is the inlet port and should be connected to tank; when the shaft turns counter clockwise, port **A** is the inlet port.

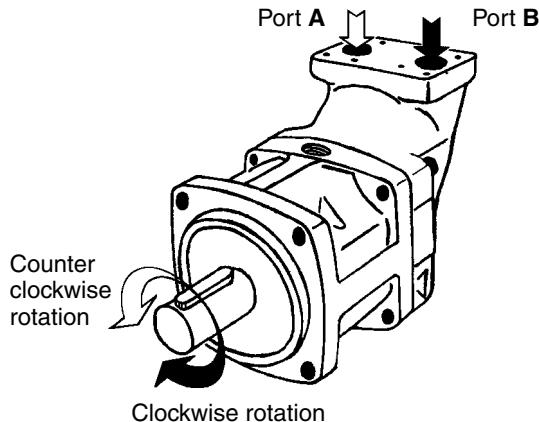

### Hydraulic fluids

Ratings and performance data for series F11/F12 are based on operating with good quality, contamination-free, petroleum-based fluids.

Hydraulic fluids type HLP (DIN 51524), automatic transmission fluids type A, or API CD engine oils can be used.

Fire resistant fluids (when used under modified operating conditions) and synthetic fluids may also be suitable.

### NOTE:

When operating the F11/F12 as a pump above the selfpriming speed (valid for both the pump and motor versions), the inlet must be sufficiently pressurized. Increased noise and deteriorating performance may otherwise be experienced.

For further information refer to 'Selfpriming speed and required inlet pressure' on pages 11 and 42.

### Operating temperature

The following temperatures should not be exceeded (type V FPM shaft seals):

Main circuit 80 °C

Drain circuit: 115 °C.

NBR shaft seals (type N) can be used to 90 °C drain fluid temperature.

**NOTE:** The temperature should be measured at the utilized drain port.

Continuous operation may require case flushing in order to meet the viscosity and temperature limitations.

The following table shows operating speeds, above which flushing is usually required, as well as suggested flow through the case.

### Series F11

| Frame size | Speed [rpm] | Flow [l/min] |
|------------|-------------|--------------|
| F11-5      | 5500        | 1 - 2        |
| F11-6      | 4500        | 2 - 3        |
| F11-10     | 4500        | 2 - 3        |
| F11-12     | 4500        | 2 - 3        |
| F11-14     | 4500        | 2 - 3        |
| F11-19     | 4000        | 2 - 4        |

### Series F12

| Frame size | Speed [rpm] | Flow [l/min] |
|------------|-------------|--------------|
| F12-30     | 3500        | 4 - 8        |
| F12-40     | 3000        | 5 - 10       |
| F12-60     | 3000        | 7 - 14       |
| F12-80     | 2500        | 8 - 16       |
| F12-90     | 2500        | 8 - 16       |
| F12-110    | 2300        | 9 - 18       |
| F12-125    | 2300        | 9 - 18       |
| F12-150    | 2200        | 10 - 20      |
| F12-250    | 1800        | 12 - 22      |

### F11/F12 in series operation

When running F11/F12 in series at higher pressure levels,

Please contact Parker Hannifin for further information.

### Viscosity

The ideal operating range is 15 to 30 mm<sup>2</sup>/s [cSt].  
At operating temperature, the viscosity (of the drain fluid) should be kept above 8 mm<sup>2</sup>/s [cSt].  
At start-up, the viscosity should not exceed 1000 mm<sup>2</sup>/s [cSt]

### Filtration

To obtain the highest service life of the F11/F12, the fluid cleanliness should meet or exceed ISO code 20/18/13 (ISO 4406). During normal operating conditions, a 10 µm (absolute) filter is recommended.

### Case pressure

The service life of the shaft seal ring is affected by the speed of the motor and the case drain pressure and it can decrease with an increase in the frequency of pressure peaks.

Note, seal life can be shorter at unfavourable operating conditions (high temperature, low oil viscosity, contaminated oil).

The table below shows recommended case pressure as a function of shaft speed.

| Shaft speed                   | [rpm] | 1500     | 3000      | 4500      | 6000      | max       |
|-------------------------------|-------|----------|-----------|-----------|-----------|-----------|
| F11-5, -6, -10, -12, -14, -19 | [bar] | 0.5 - 10 | 0.5 - 7.0 | 1.0 - 5.0 | 2.0 - 5.0 | 3.0 - 5.0 |
| F12-30, -40, -60, -80, -90    | [bar] | 0.5 - 8  | 0.5 - 6.0 | 1.0 - 4.5 | 2.0 - 4.0 | -         |
| F12-110, -125, -150, -250     | [bar] | 0.5 - 6  | 1.0 - 4.0 | 2.0 - 4.0 | -         | -         |

The case pressure must be equal to or greater than the external pressure on the shaft seal ring.

**To secure correct case pressure and lubrication, a spring loaded check valve, 1-3 bar, in the drain line (shown on next page) is recommended.**


#### Note.

Contact Parker Hannifin for information when operating at high speeds.

### Case drain connections



Series F11/F12 have two drain ports, **C** and **D**, while F12-110 and -125 have an additional port, **E**.

The uppermost drain port (such as port C in the illustration below) should always be utilized.

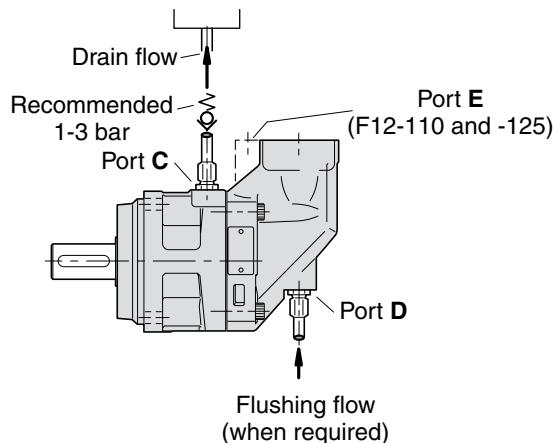

In mounting positions such as 'shaft up' (below) a spring loaded check valve should be installed in the drain line in order to insure a sufficiently high oil level in the case.


Preferably, the drain line should be connected directly to the reservoir.

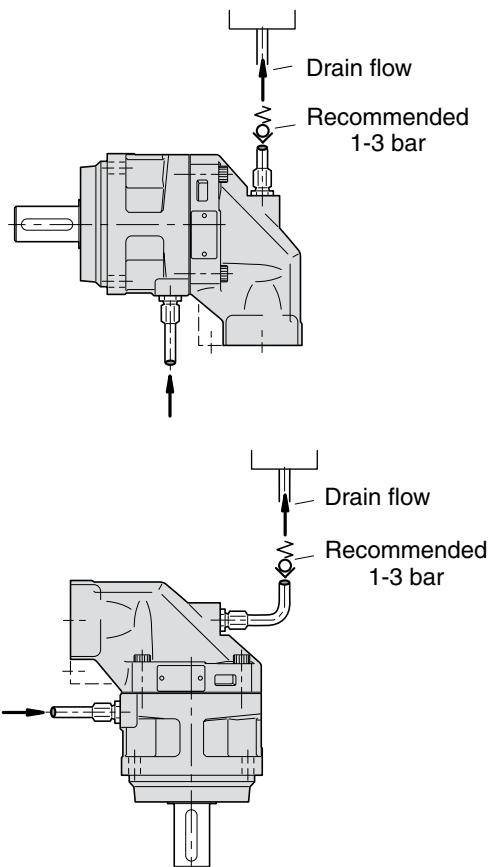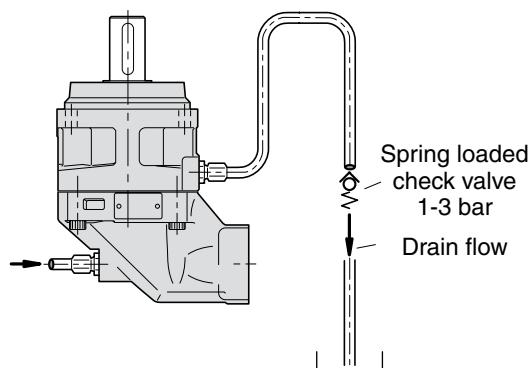

### Before start-up

Make sure the F11/F12 case as well as the entire hydraulic system is filled with a recommended fluid.

The internal leakage, especially at low operating pressures, is *not* sufficient to provide lubrication at start-up.

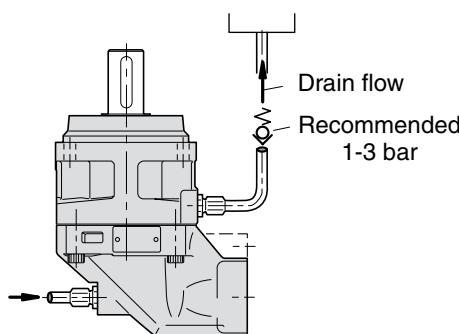

### NOTE:

- To avoid cavitation and obtain a low noise level as well as reduced heat generation, tubes, hoses and fittings must be adequately dimensioned.
- Preferably, the suction line flow speed should be 0.5 to 1 m/s, and pressure line flow speeds 3 to 5 m/s.

# Parker Worldwide

## Europe, Middle East, Africa

### AE – United Arab Emirates,

Dubai

Tel: +971 4 8127100

parker.me@parker.com

### AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0

parker.austria@parker.com

### AT – Eastern Europe, Wiener

Neustadt

Tel: +43 (0)2622 23501 900

parker.eastern@parker.com

### AZ – Azerbaijan, Baku

Tel: +994 50 22 33 458

parker.azerbaijan@parker.com

### BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900

parker.belgium@parker.com

### BG – Bulgaria, Sofia

Tel: +359 2 980 1344

parker.bulgaria@parker.com

### BY – Belarus, Minsk

Tel: +48 (0)22 573 24 00

parker.poland@parker.com

### CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00

parker.switzerland@parker.com

### CZ – Czech Republic, Klecany

Tel: +420 284 083 111

parker.czechrepublic@parker.com

### DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0

parker.germany@parker.com

### DK – Denmark, Ballerup

Tel: +45 43 56 04 00

parker.denmark@parker.com

### ES – Spain, Madrid

Tel: +34 902 330 001

parker.spain@parker.com

### FI – Finland, Vantaa

Tel: +358 (0)20 753 2500

parker.finland@parker.com

### FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25

parker.france@parker.com

### GR – Greece, Athens

Tel: +30 210 933 6450

parker.greece@parker.com

### HU – Hungary, Budapest

Tel: +36 23 885 470

parker.hungary@parker.com

### IE – Ireland, Dublin

Tel: +353 (0)1 466 6370

parker.ireland@parker.com

### IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21

parker.italy@parker.com

### KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000

parker.kazakhstan@parker.com

### NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000

parker.nl@parker.com

### NO – Norway, Asker

Tel: +47 66 75 34 00

parker.norway@parker.com

### PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00

parker.poland@parker.com

### PT – Portugal, Leca da Palmeira

Tel: +351 22 999 7360

parker.portugal@parker.com

### RO – Romania, Bucharest

Tel: +40 21 252 1382

parker.romania@parker.com

### RU – Russia, Moscow

Tel: +7 495 645-2156

parker.russia@parker.com

### SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00

parker.sweden@parker.com

### SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252

parker.slovakia@parker.com

### SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650

parker.slovenia@parker.com

### TR – Turkey, Istanbul

Tel: +90 216 4997081

parker.turkey@parker.com

### UA – Ukraine, Kiev

Tel: +48 (0)22 573 24 00

parker.poland@parker.com

### UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878

parker.uk@parker.com

### ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700

parker.southafrica@parker.com

## North America

### CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

### US – USA, Cleveland (industrial)

Tel: +1 216 896 3000

### US – USA, Elk Grove Village (mobile)

Tel: +1 847 258 6200

## Asia Pacific

### AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

### CN – China, Shanghai

Tel: +86 21 2899 5000

### HK – Hong Kong

Tel: +852 2428 8008

### ID – Indonesia, Tangerang

Tel: +62 21 7588 1906

### IN – India, Mumbai

Tel: +91 22 6513 7081-85

### JP – Japan, Fujisawa

Tel: +81 (0)4 6635 3050

### KR – South Korea, Seoul

Tel: +82 2 559 0400

### MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

### NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

### SG – Singapore

Tel: +65 6887 6300

### TH – Thailand, Bangkok

Tel: +662 186 7000

### TW – Taiwan, New Taipei City

Tel: +886 2 2298 8987

### VN – Vietnam, Ho Chi Minh City

Tel: +84 8 3999 1600

## South America

### AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

### BR – Brazil, Cachoeirinha RS

Tel: +55 51 3470 9144

### CL – Chile, Santiago

Tel: +56 2 623 1216

### MX – Mexico, Toluca

Tel: +52 72 2275 4200

Ed.2015-01-12

© 2015 Parker Hannifin Corporation. All rights reserved.

Catalogue HY30-8249/UK. 1.5 M 02/2015, ZZ

### EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,

IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

Toll-free number: 1-800-27 27 537

[parker.com/pmd](http://parker.com/pmd)

Your local authorized Parker distributor

