



Electro-mechanical safety switches Safety switches with separate actuator, i12S

i12-SB213



Model Name > [i12-SB213](#)
Part No. > [6025059](#)

At a glance

- Narrow plastic housing
- Rigid and mobile actuators
- Available with M16 X 1.5 cable entry gland or Flexi Loop-compatible M12 plug connector (depending on variant)
- Slow-action switching element with up to three contacts
- IP 67 enclosure rating

Your benefits

- Cost-effective solution for all standard safety applications
- Small design simplifies installation and makes it easy to mount directly on the guard door frame
- High reliability and safety due to the cone shaped metal alignment aid
- Flexi Loop now enables a safe series connection with enhanced diagnostics capabilities and minimal wiring effort.



actuator not supplied with delivery

Note: The actuator has to be ordered separately. See "Accessories" for further details.



Technical data

Design:	Small
Housing material:	Glass-fiber reinforced thermoplastic
Enclosure rating:	IP 67 (IEC 60529)
Ambient operating temperature:	-20 °C ... +80 °C
B10d parameter:	2* 1E 06 switching cycles, with small load
Locking force:	15 N
Actuating element type:	Separate actuator
Number of actuation directions:	5
Approach speed:	10 m/min
Switching principle:	Slow action switching element
Number of positive action N/C contacts:	2
Number of N/O contacts:	1
Mechanical life:	1* 1E 06 switching cycles
Usage category:	AC-15/DC-13 (IEC 60947-5-1)


Rated operating current (voltage): 3 A (240 V AC)
 2 A (24 V DC)

Electrical connection: Cable gland, 1 x M16


Flexi Loop-compatible plug connector: -

Weight: 0.11 kg


Actuator travel diagram

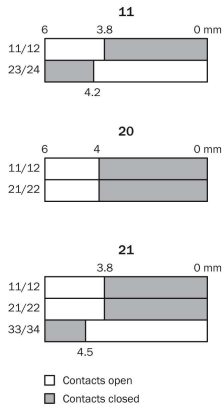

Switching elements

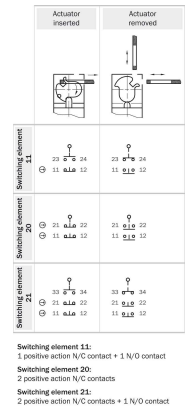

Dimensional drawing

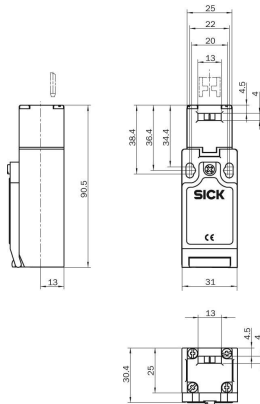

Australia

Phone +61 3 9457 0600
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6881000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 5309 2112
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail sick@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 88 65 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 (800) 325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com