


**Copy counters**

**FLDK 110C1005/S42**

**dimension drawing**

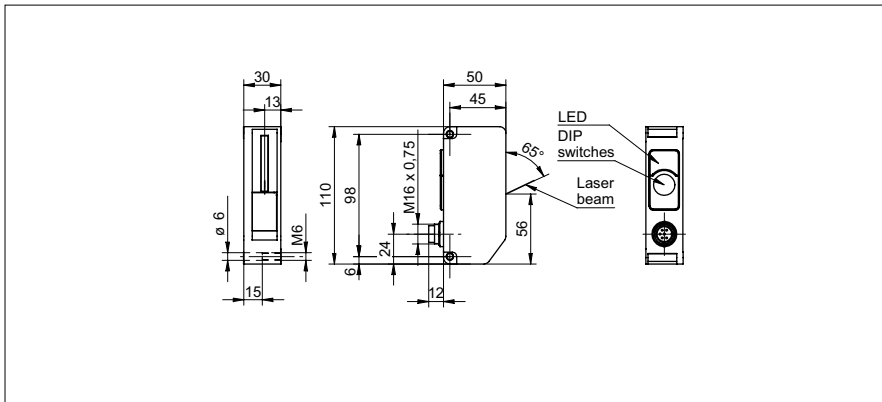

**general data**

measuring distance Sd	0 ... 120 mm
optimum operating distance	100 mm
counting rate	< 600000 copies/h
object speed	5 m/sec
object cycle distance	> 1 mm
sensitivity	single sheet/edge thickness 0,25 mm
sync. input	no
measuring point	visible red laser line 3 mm
light source	pulsed red laser diode
wave length	670 nm
laser class	2
edge indicator	LED yellow
power on indication	LED green
false pulse suppression	on/off switchable
sensitivity adjustment	high/low switchable

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	180 mA
output circuit	opto isolated
output pulse length	5 / 10 / 15 / 20 ms selectable
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

width / diameter	30 mm
type	rectangular
housing material	PA 6
connector base (main connector)	DIN 45322, 6 pin
front (optics)	glass


**ambient conditions**

operating temperature	0 ... +50 °C
protection class	IP 54

**photo**



**connection diagram**

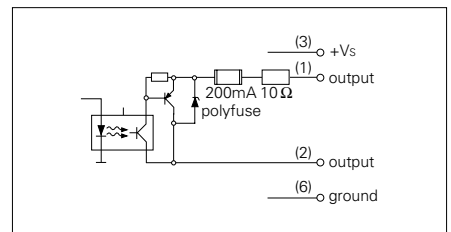

**laser warning**

**LASER RADIATION**  
**DO NOT STARE INTO BEAM**  
Wavelength: 620...680nm  
Max. av. Output: < 1mW  
IEC 60825-1, Ed. 2, 2007  
**CLASS 2 LASER PRODUCT**

Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to laser notice No. 50, dated June 24, 2007

