stay connected

MIRO,TR,24VDC,24VDC 6A SK OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 6 A

Transistor 6 A
24 V DC
Screw terminals

Link to Product

Illustration

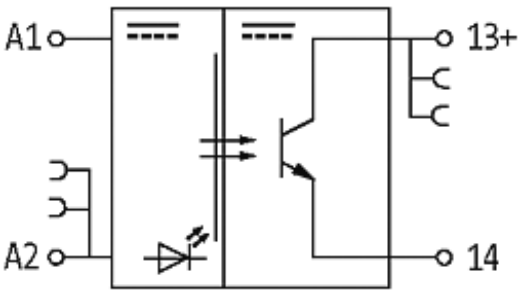

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

MURR ELEKTRONIK
stay connected

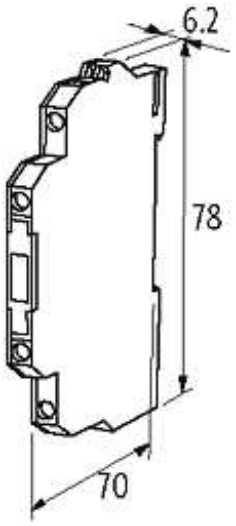

Product may differ from Image

Approvals

Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	approx. 10 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H × W × D	78×6.2×70 mm

Output

Switching voltage	5...48 V DC
Switching current per output	1 mA...6 A (without derating)
Saturation voltage (across output)	max. 0.1 V DC
Leakage current (output is open)	max. 25 µA
Switching time ON/OFF	2/5 ms
Switching frequency	max. 1/0.1 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16