


## MIRO TRIAC 110VAC/1X400VAC-5A


IN: 110 VAC - OUT: 400 VAC / 5 A

Triac 5 A  
115 V AC  
Screw plug-in terminals

### [Link to Product](#)

#### Illustration

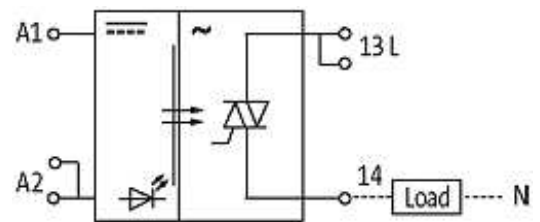

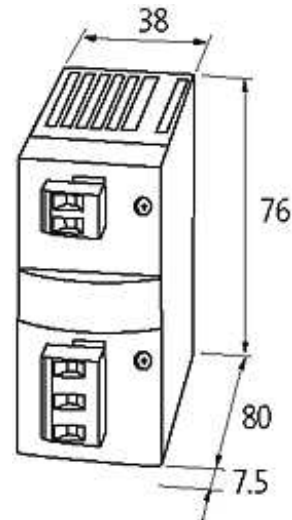

Product may differ from Image

### Input

Voltage range ON	70...150 V AC
Voltage range OFF	0...25 V AC
Control current	approx. 9 mA
Control voltage	115 V AC
LED display	LED (green)

### General data

Housing	Black plastic, flame retardant
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Dimensions H × W × D	76×38×80 mm

### Output

Switching voltage	12...400 V AC
Switching current per output	10 mA...5 A (no derating)
Saturation voltage (across output)	max. 0.15 V AC
Leakage current (output is open)	max. 1 mA
Switching time ON/OFF	10/10 ms
Switching frequency	max. 20/1 Hz (resist./ind.)
Surge current	70 A

### Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1