



<b>Identification</b>	Type	L-A-9600 2,5m PVC 0-230 V
	Part-No.	709600
<b>Technical data</b>		
Function type	Suppressors for valves	
Nominal voltage	AC/DC 0–230 V	
Rated frequency	50–60 Hz	
Type of connecting lead	PVC black / PVC 3 × 0.5 mm <sup>2</sup>	
Length of connecting lead (M)	2.5 M	
Connecting lead	∅ 4.8 ± 0.15 mm	
<b>General</b>		
Form	Construction A, contact clearance 18 mm	
Coil Current max.	≤7 A	
Conductor marking	color-coded conductors	
Housing material	TPU black <sup>1)</sup>	
Protection class	IP 67	
Field installation	Breakaway torque 0.4 Nm Direct assembly with protective conduit is possible.	
Operation temperature range	Male: -25°C – 90°C, cable: fixed -30°C– 80°C, moving -5°C – 70°C	
Storage temperature range	-40 °C ... 90 °C	
Dimensions (w × h × d)	28.0 × 26.5 × 48.0 mm	
Weight (kg/piece)	0.130	
Standards	EN 175301-803 (DIN 43 650), ISO 4400	

29.01.2017 – Subject to technical modification

Part-No. 709600

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk





SYSTEMATIC TECHNOLOGY

**Dimensions**

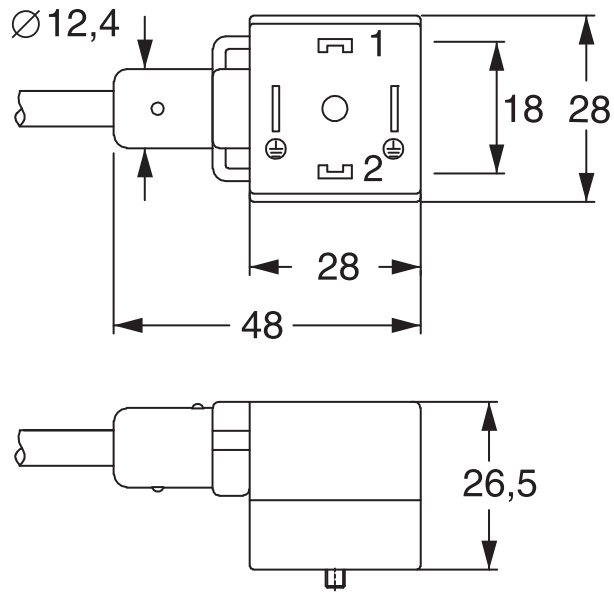

**PIN assignment**



**Accessories**

Accessories	Color	Article number	Type	PU
Tag holder 7×20 mm	white	760968	BZT-0720	100
Protective pipes:				
-PA	black	271142	CX 12 PA	50
-PVC with hard PVC coil	grey	270401	CF 12 EL	30
-PVC with steel braiding		270011	CF 13 S	50
-PUR with coil		270411	CF PUR 12 EL	22
Marker sleeve	transparent	499995		500
Tag holder 4×23 mm for 499995		499988		200

**Comments**

<sup>1)</sup> Very good chemical and oil resistance. The material resistance must be checked based on the application for use with aggressive media!

29.01.2017 – Subject to technical modification

Part-No. 709600

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
 www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY