

regulated, 960 W, 3-phase



Identification	Type	CPSB3-960-72
	Part-No.	722813
Description	Primary switchmode power supply, PFC, 3-phase Input: Wide range input AC 340 - 550 V Output: 72 V, adjustable	

25.08.2017 – Subject to technical modification

Part-No. 722813

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · Power supply

Input

Number of phases	3
Rated voltage U_N	3 × AC 400–500 V
Operation voltage range	3 × AC 340–550 V
Line frequency	47 – 63 Hz
Rated current I_N	2.8 A @ AC 400 V / 2.2 A @ AC 500 V
Inrush current	<50 A
External fuse	Mini-circuit breaker: 3 × B 16 A, C 10 A (required)
Power Factor Correction P.F.C.	>0.7

Output

Rated voltage U_N	DC 72.00 V
Rated current I_N	13.30 A
Max. output current (limited current)	14 A
Max. output current (HICCUP, 5 sec)	20 A
Heat dissipation	<62 W
Setting range $U_{out\ min.}/U_{out\ max.}$	72-84 V
Load regulation	<1 %
Ripple and Noise	<300 mV pp
Hold up time	>10 ms @ AC 400 V / >15 ms @ AC 500 V
Status indication DC ON LED green	≥64.8 V
Status indication DC LOW LED red	≤64.8 V
Parallel / redundant mode	max. 2 devices / via external decoupling diodes e.g. 722999
Efficiency	>94 %
Over voltage protection	<94 V
Rated over load protection	> 90°C, auto-reset
Short circuit	Hiccup Mode / Current limit

Monitoring

DC ON Control (Rdy)	N/O contact
Switching voltage	AC 300 V / DC 150 V
Switching current	AC/DC 1 A
Switching capacity	300 VA / 30 W
Isolation voltage	AC 500 V

General

Switching frequency	approx. 70-110 kHz
Insulation voltage input / output	DC 4.2 kV
Insulation voltage input / ground	DC 2.2 kV
Insulation voltage output / ground	DC 750 V
Derating	>50 °C: -15 W/°C, UL 508: >45 °C: -15 W/°C
Operation temperature range	-20 °C ... +60 °C (Derating)

25.08.2017 – Subject to technical modification

Part-No. 722813

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Technical data sheet · Power supply

Storage temperature range	-25 °C ... +85 °C
MTBF	>500000 h: SN29500 / >150000 h: MIL HDBK 217F
Relative air humidity	20 – 90 % RH, not condensing
Cooling	Air convection, forced cooling >50°C, 50 mm distance top/bottom
Housing material	Aluminum
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	vertical
Shock resistance	30 g 6 ms, 20 g 11 ms, 3 shocks/direction, 18 shocks in total, IEC60068-2-27: 2008
Vibration resistance	5 – 17.8 Hz: ±1.6 mm, 17.8 – 500 Hz: 2 g 2 hours/axes X,Y,Z, IEC 60068-2-6: 2007
Protection class	IP20 (IEC 529, EN 60529)
Protection class	I
Over voltage category	III
Degree of pollution	2
Weight	1.200 kg/piece
Connection device	Screw terminal 0.20 mm ² – 6.0 mm ² max. 0.62 Nm
Dimensions (w × h × d)	81.0 × 127.0 × 146.0 mm
Approvals	cULus (E249179)
Standards	IEC 950 EN 60950 EN 61000-4-2/3/4/5/6/11 EN 61000-6-2 EN 61000-6-4 EN 50178 EN 61558 EN 50081-1 EN 50082-2 EN 55022 Class B
PU	1 piece

Dimensions

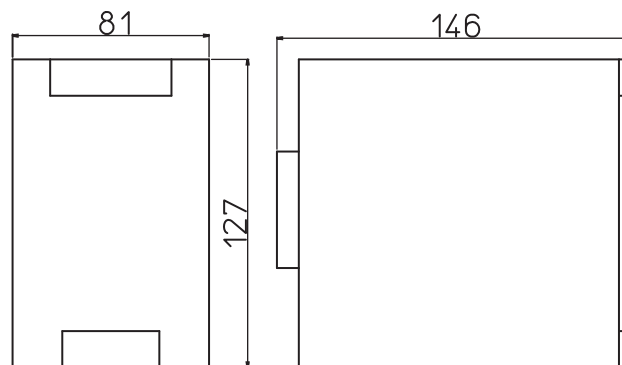

25.08.2017 – Subject to technical modification

Part-No. 722813

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU


Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Short circuit characteristics

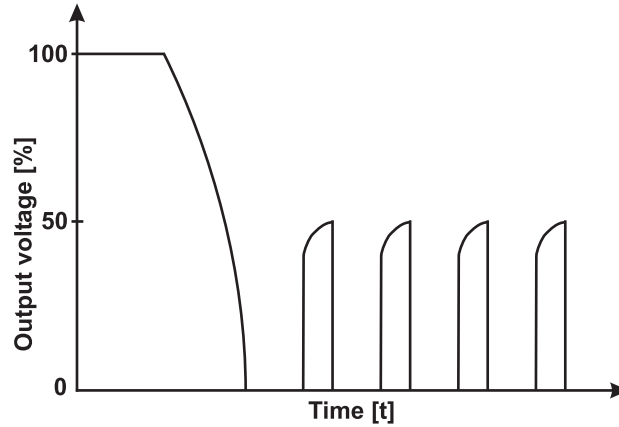

25.08.2017 – Subject to technical modification

Part-No. 722813

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2

www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY