



Identification	Type	Relais-SNR 24V 1W
	Part-No.	768002
Description	Replacement relay, 1 CO contact AC/DC 250 V, 6 A, 1500 VA	
Input		
Rated voltage U_N	DC 24 V	
Input voltage	DC: $\pm 30\%$	
Interrupting voltage	DC: $>0.1 U_N$	
Power consumption	DC: 170 mW	
Output		
Contact type	1 changeover contacts	
Min. switching voltage	AC/DC 17 V	
Max. switching voltage	AC/DC 250 V	
Min. switching current	AC/DC 5 mA	
Max. switching current	6 A	
Switching capacity DC 13	1 A @ 24 V, 200 mA @ 115 V, 100 mA @ 250 V	
Switching capacity AC 15	3 A	
Max. switching capacity	1500 VA	
Resistor	$<100\text{ m}\Omega$	

25.08.2017 – Subject to technical modification

Part-No. 768002

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk




Technical data sheet • Interface Technology

Contact material	AgSnO ₂
Mechanical service life	> 5 × 10 ⁶ operations
Inrush current	10 A (4 ms)
Switch-on delay	5 ms
Shutdown delay	2.5 ms
Clearance/creep. dist. (control/load side)	Air clearance: >6 mm, creep clearance: >8 mm
Rated insulation voltage (EN 50178)	AC 250 V
Over voltage category	III
Degree of pollution	3
Switching frequency	with load: 6 cycles/minute, without load 1,200 cycles/minute

General

Protection class	RTIII – wash-tight
Shock resistance	5g
Vibration resistance	6 g, 10...150 Hz
Insulation voltage input / output	4.0 kV _{eff}
Safe isolation	yes
Operation temperature range	-25 °C ... +60 °C
Storage temperature range	-40 °C ... +85 °C
Dimensions (w × h × d)	5.0 × 28.0 × 15.0 mm
Weight	0.006 kg/piece
Connection device	plug-in
Approvals	VDE cULus

Dimensions

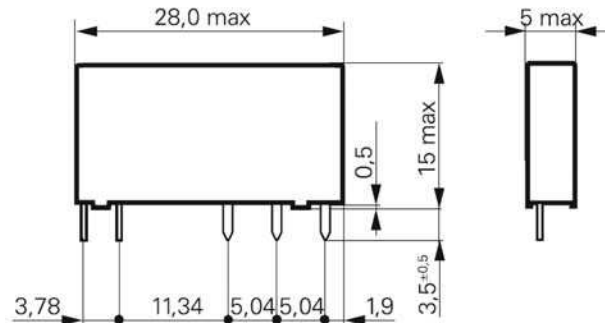

25.08.2017 – Subject to technical modification

Part-No. 768002

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com




United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Limit curve

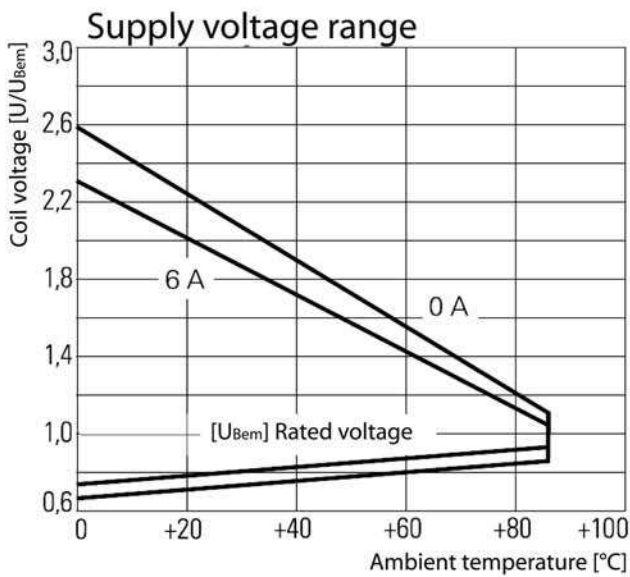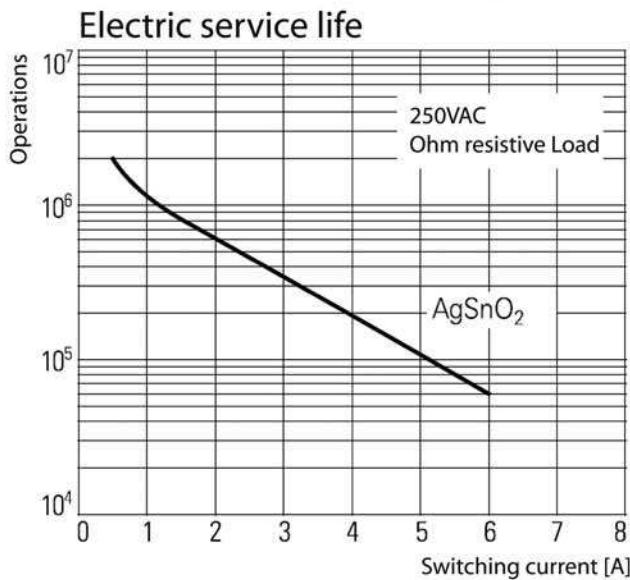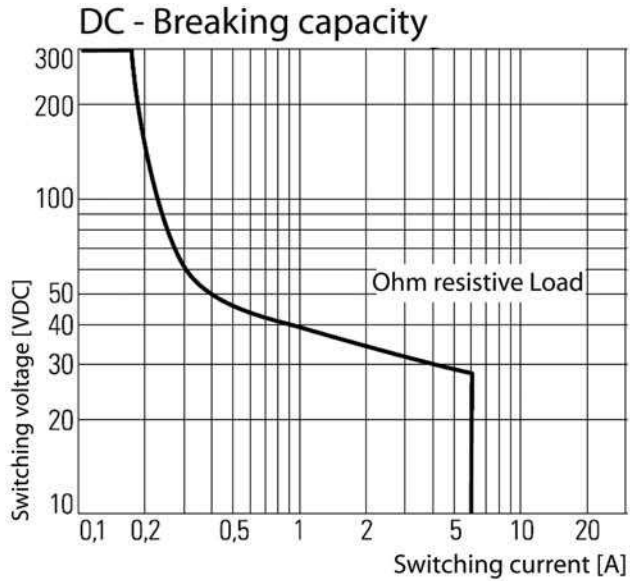

25.08.2017 – Subject to technical modi

Part-No. 768002

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY