



<b>Identification</b>	Type	REP-0140 1W DC12V
	Part-No.	770140
<b>Description</b>	DC-Relay-Interface, 1 CO contact, pluggable AC 400 V/DC 300 V, 16 A, 4000 VA	
<b>Input</b>		
Rated voltage $U_N$	DC 12 V	
Input voltage range	8.4 – 18 V	
Rated current $I_N$	0.034 A	
Interrupting voltage	<1.2 V	
Protection device	Free-wheeling diode	
Status display input	LED green	
Power consumption	0.4 W	
<b>Output</b>		
Contact type	1 changeover contacts	
Switching element	Relays	
Min. switching voltage	AC/DC 5 V	
Max. switching voltage	AC 400 V / DC 300 V	
Min. switching current	AgNi: AC/DC 5 mA	
Max. switching current	AC/DC 16 A	

25.08.2017 – Subject to technical modification

Part-No. 770140

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk

## Technical data sheet · Interface Technology

---

Switching capacity DC 13	2 A @ 24 V, 300 mA @ 115 V, 150 mA @ 230 V
Switching capacity AC 15	3.3 A
Max. switching capacity	4000 VA
Contact material	AgNi
Mechanical service life	>10 <sup>7</sup> operations
Switch-on delay	15 ms
Shutdown delay	8 ms
Clearance/creep. dist. (control/load side)	Clearance distance: > 10 mm; creepage distance: > 10 mm
Protection device	none
Rated insulation voltage (EN 50178)	AC 400 V (category C 250)

---

### General

---

Housing material	PA 6.6 + GF V0 (UL)
Colour of the housing	black
Protection class	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Insulation voltage input / output	5.0 kV <sub>eff</sub>
Safe isolation	yes
Operation temperature range	-40 °C ... +85 °C
Storage temperature range	-40 °C ... +85 °C
Dimensions (w × h × d)	15.6 × 75.0 × 67.0 mm (including mounting bracket)
Weight	0.062 kg/piece
Connection device	Screw terminal 0.20 mm <sup>2</sup> – 4.0 mm <sup>2</sup>
Standards	EN 60947-4-1
Approvals	cULus

25.08.2017 – Subject to technical modification

Part-No. 770140

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223  
www.lutze.com · info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
www.lutze.com · sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

**Dimensions**

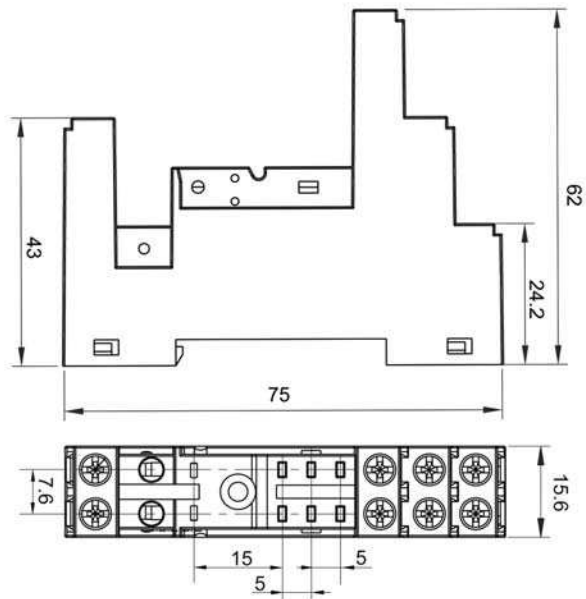

**PIN assignment**

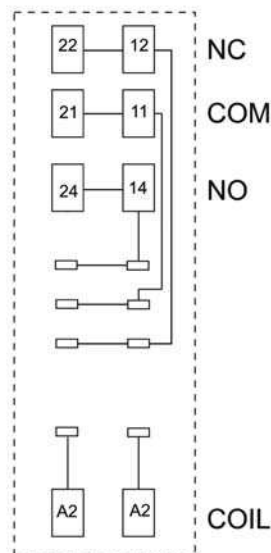

**Accessories**

25.08.2017 – Subject to technical modification

Part-No. 770140

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

## Technical data sheet - Interface Technology

---

<b>Accessories</b>	<b>Color</b>	<b>Part-No.</b>	<b>Type</b>	<b>PU</b>
Jumper comb 8-pin, Axilliary relay	black	770908	REP-0908	10
Tag holder auxiliary relay		770902	REM-0902	10
Mounting bracket auxiliary relay		770901	REE-0901	10

25.08.2017 – Subject to technical modification

Part-No. 770140

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY