

---

<b>Identification</b>	Type	RE2W-0928 AC24V
	Part-No.	770928

---

---

<b>Description</b>	Mini relay, 2 changeover contact AC 400 V/DC 300 V, 8 A, 2000 VA Contact material: AgNi, AgNi+5 µm gold-plating
--------------------	---

---

---

<b>General</b>	
Connection device	plug-in
Protection class	RTII – flux-tight
Operation temperature range	-40 °C ... +70 °C
Storage temperature range	-40 °C ... +85 °C
Weight	0.0140 kg/piece
Dimensions (w x h x d)	29.0 x 15.7 x 12.7 mm
PU	10
Approvals	UL VDE

---

25.08.2017 – Subject to technical modification

Part-No. 770928

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Dimensions

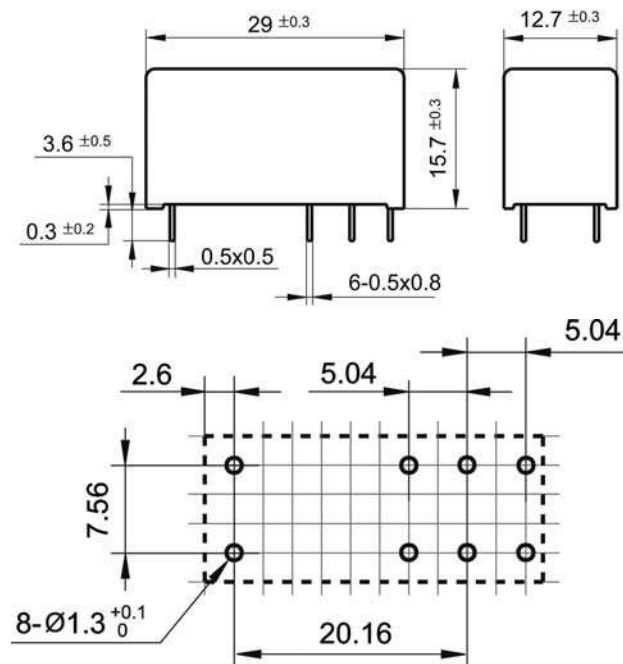

Comments

To prevent damage to the gold layer, the stated values should not be exceeded. At higher switching capacity, the gold layer vaporizes. The undercurrent in the housing can result in flashovers between coil - contact.

25.08.2017 – Subject to technical modification

Part-No. 770928

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY