

Identification	Type	LCOS-FT-PE-350-00-00-1
	Part-No.	780201.350.2
Description	LCOS function carrier 35 mm Closed design Integrated PE contact	
Use/Application/Properties	Function carrier 35 mm, cannot be expanded with modules, no PE direct contact	
Slots	1 x 35mm	
General	Housing material PA 6.6 (UL 94 V-0, NFF I2, F2)	
	Colour of the housing pebble grey	
	Mounting DIN rail mountable TS35 (EN 60715)	
	Installation position vertical	
	Marking 2 x Labelling plates 5x5 mm	
	Dimensions (w x h x d) 35.0 x 28.0 x 110.0 mm	
	Weight 0.060 kg/piece	

25.08.2017 – Subject to technical modification

Part-No. 780201.350.2

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk




Technical data sheet · Load monitoring

Standards	EN 60947-1 EN 50178 EN 50124-1 EN 50175 IEC 60068-2-42, 43, 8, 27 EN 60064-1
Approvals	UL GL
PU	10 piece

General ambient conditions

Operation temperature range	-40 °C ... +85 °C
Storage temperature range	-40 °C ... +85 °C
Relative air humidity	5 % – 95 % without condensation
Protection class	IP20
Heat dissipation	9 W @ 20°C, 4 W @ 60°C, 3 W @ 75°C
Shock resistance	15 g 11 ms acc. to IEC 60068-2-27
Vibration resistance	4 g acc. to EN 60068-2-8

Dimensions

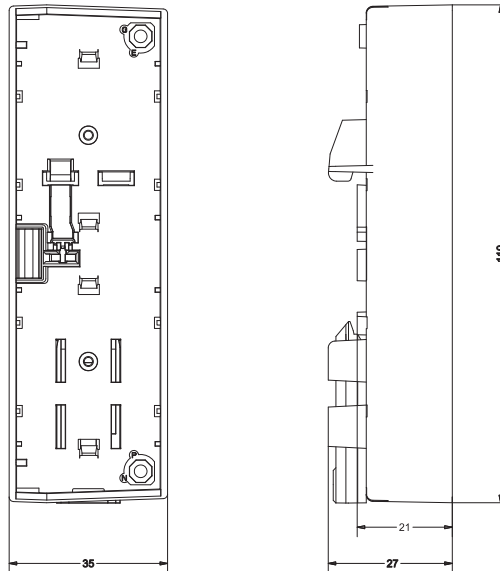

25.08.2017 – Subject to technical modification

Part-No. 780201.350.2

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY