

MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 320VA IN: 230/400VAC +/- 15VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers
320 VA
Isolation class T 40/B


Other voltages on request.

[Link to Product](#)

Illustration

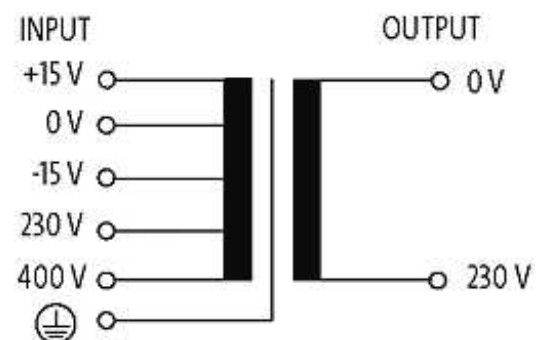

stay connected

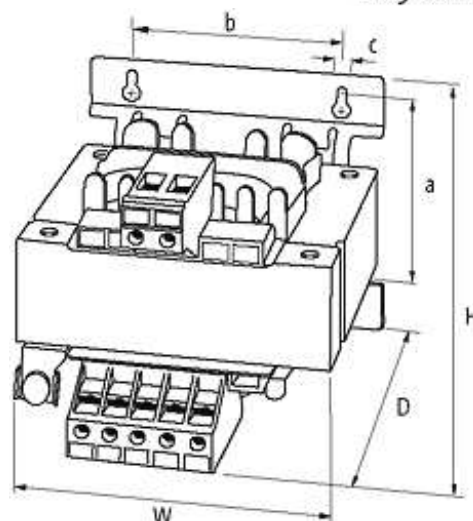

Product may differ from Image

Input

Input voltage	230/400 $\pm$ 15 V AC
Input current	1.57 A (230 V AC); 0.9 A (400 V AC)
Inrush current	22 A (230 V AC); 13 A (400 V AC)
Short-circuit current	27 A (230 V AC); 16 A (400 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-2-4, EN 62041 category 0
Test isolation voltage	5.8 kV (prim./sec.)
Mounting method	Key-hole mounting
Dimensions H $\times$ W $\times$ D	104 $\times$ 120 $\times$ 122 mm
Fixing centers a $\times$ b $\times$ c	86.4 $\times$ 90 $\times$ 5.8 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	230 V AC
----------------	----------

Commercial data

country of origin	CZ
customs tariff number	85043180
minimum order quantity	1