

**M23 female 90° with cable**

PUR 8x0.34+3x0.75 gy+drag chain 5m

M23

Female 90°

19-pole

11-pole used


for 4-way distribution boxes, 5-pole

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Link to Product](#)****Illustration**

|    |                      |
|----|----------------------|
| 15 | white                |
| 7  | gray/pink            |
| 5  | green                |
| 4  | red/blue             |
|    | yellow               |
| 16 | white/green          |
| 8  | gray                 |
| 3  | brown/green          |
| 14 | brown 1.0 mm²        |
| 19 | blue 1.0 mm²         |
| 6  | green/yellow 1.0 mm² |
| 12 |                      |

Female

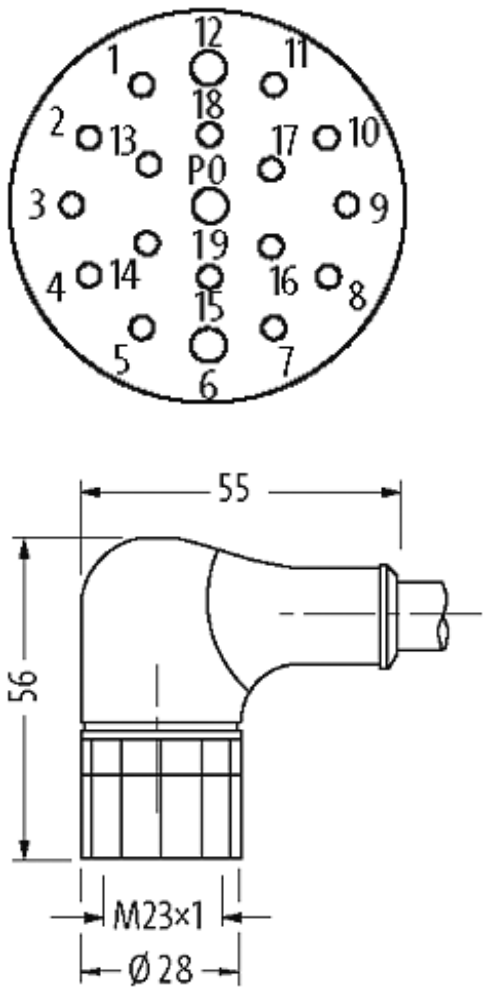

Product may differ from Image

| Cables                      |  |
|-----------------------------|--|
| Cable number                | 363                                      |
| No./diameter of wires       | 8×0.34 + 3×0.75 mm²                      |
| C-track properties          | 2 Mio.                                   |
| Jacket Color                | gray                                     |
| Shore hardness outer jacket | 85 ± 5A                                  |
| Material (jacket)           | PUR/PVC                                  |
| Outer Ø                     | approx. 9.1 mm                           |
| Bend radius (fixed)         | 10 × outer Ø                             |
| Bend radius (moving)        | 12 × outer Ø                             |
| Temperature range (fixed)   | -30...+80 °C                             |
| Temperature range (mobile)  | -5...+70 °C                              |
| General data                |  |
| Temperature range           | -25...+85 °C, depending on cable quality |
| Technical Data              |  |

Operating current per contact                      max. 7.5 A

**Commercial data**

customs tariff number                                      85444290

minimum order quantity                                      1