

M23 FEMALE 19 POLE 0°

PUR 8x0,34+3X0.75 shielded GRAY, UL 20m

M23

Shield on M23 cap nut

Female straight

19-pole

11-pole used


for 4-way distribution boxes, 5-pole

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

| | |
|--------|------------------------------------|
| 15 | white |
| 7 | gray/ pink |
| 5 | green |
| 4 | red/ blue |
| 16 | yellow |
| 8 | white/ green |
| 3 | gray |
| 14 | brown/ green |
| 19 | brown 0.75 mm ² |
| 6 | blue 0.75 mm ² |
| 12 | green/ yellow 0.75 mm ² |
| Shield | |

Female

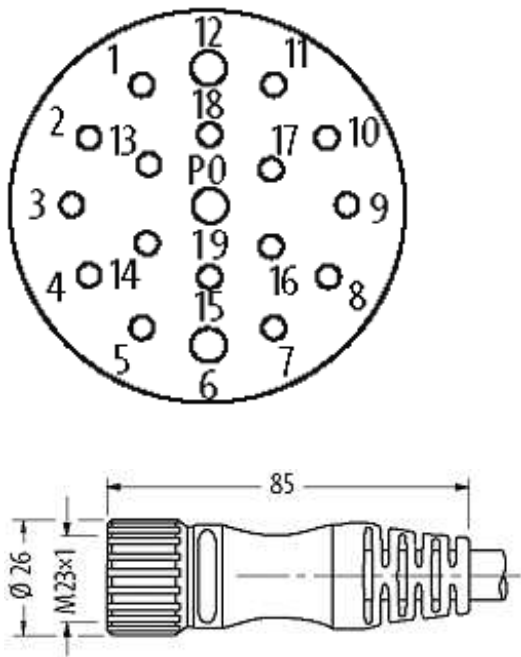

Product may differ from Image

| Form | |
|-------------------------------|--|
| Form | 23711 |
| Cables | |
| Cable number | 373 |
| No./diameter of wires | 8×0.34 + 3×0.75 mm² |
| Wire isolation | TPE (grpk, wh, rdbl, gn, whgn, ye, brgn, gr, br, bl, gnye) |
| C-track properties | 5 Mio. |
| Jacket Color | gray |
| Shore hardness outer jacket | 85 ± 5A |
| Material (jacket) | PUR (UL/CSA) |
| Outer Ø | approx. 9.3 mm |
| Bend radius (fixed) | 10 × outer Ø |
| Bend radius (moving) | 12 × outer Ø |
| Temperature range (fixed) | -40...+90 °C |
| Temperature range (mobile) | -40...+90 °C |
| Shielded | yes |
| General data | |
| Temperature range | -25...+85 °C, depending on cable quality |
| Technical Data | |
| Operating voltage | max. 125 V AC/DC |
| Operating current per contact | max. 10 A |
| Locking of ports | Screw thread M23 × 1 mm |

Protection IP67 inserted and tightened (EN 60529)

Commercial data

| | |
|------------------------|----------|
| country of origin | DE |
| customs tariff number | 85444290 |
| minimum order quantity | 10 |