

**M12 MALE 0° / M12 FEMALE 0° 3 POLE**

PUR 3X0.34 black UL/CSA, ROBOT, drag ch 0.3m


Male straight to female straight

M12 - M12, 3-pole


Special Type

Art.-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request. Further cable lengths on request.


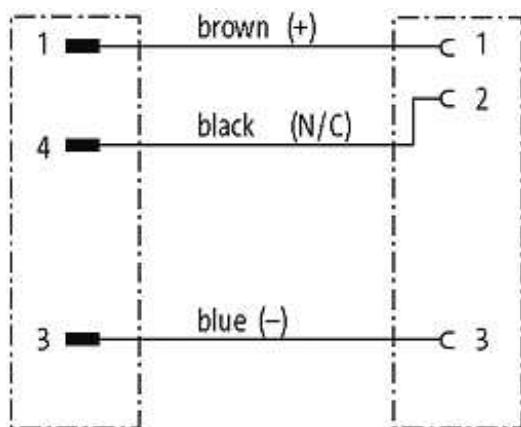
**Link to Product****Illustration**

Male



Female



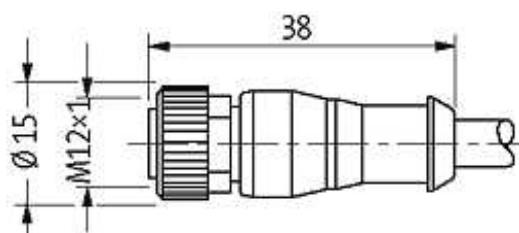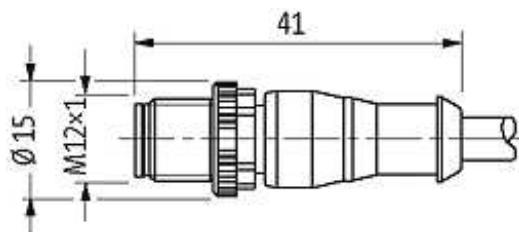

Product may differ from Image

### Approvals



\* only for products with UL/CSA approved cable

### Form

Form 40061

### Cables

Cable number	653
No./diameter of wires	3 x 0.34 mm <sup>2</sup>
Wire isolation	PP (br, bl, bk)
C-track properties	10 Mio.
Torsion	1 Mio. ± 360 °/m
Jacket Color	black
Shore hardness outer jacket	58 ± 3D
Material (jacket)	PUR (UL/CSA), welding spark res.
Outer Ø	approx. 4.3 mm
Bend radius (fixed)	5 x outer Ø
Bend radius (moving)	10 x outer Ø
Temperature range (fixed)	-40...+90 °C
Temperature range (mobile)	-25...+90 °C

### General data

Temperature range -25...+85 °C, depending on cable quality

### Technical Data

Operating voltage max. 250 V AC/DC

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Operating voltage (only UL listed)	max. 30 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 x 1 mm (recommended torque 0.6 Nm) self-securing
Locking material	Zinc die casting, matte nickel plated
Protection	IP66K, IP67 inserted and tightened (EN 60529)

**Commercial data**

country of origin	DE
customs tariff number	85444290
minimum order quantity	1