

Model number

U-G1FF

AS-Interface module mounting base for connection to flat cable (AS-Interface and external auxiliary power)

Function


The U-G1FF base allows to connect slaves with additional supply (EEMS) to AS-Interface. It has one connection type for AS-Interface and an other for the auxiliary power, which are not interconnected. For the mounting of an upper part (module or lid VAZ-DK-G1) the flat cable will be pressed in the contact prongs and so connected.

Accessories


VAZ-DK-G1

Cover for bases -G1F- and -G1P-

Dimensions

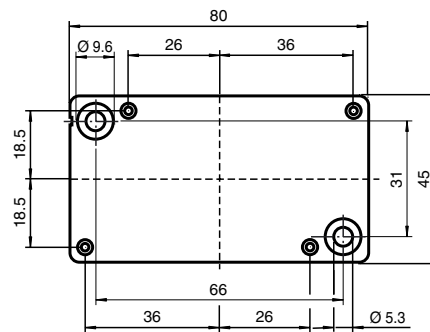

Electrical connection

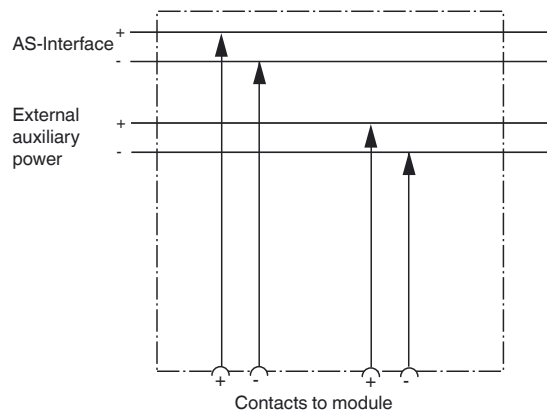

Technical data

General specifications

UL File Number	E223772
----------------	---------

Electrical specifications

Current loading capacity	≤ 2 A for max. 40 V
--------------------------	---------------------

Ambient conditions

Ambient temperature	-25 ... 60 °C (-13 ... 140 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Protection degree	IP67 according to EN 60529 (only in connection with module or cover)
Connection	Flat cable for AS-Interface and external power supply
Material	
Housing	PBT
Dimensions	about 80, 45, 20 mm (L, W, H)
Mounting	DIN rail or screw mounting

Matching system components**VBA-2E2A-G4-ZE/E2**

G4 module IP67
2 inputs (PNP) and 2 electronic outputs

VBA-4E3A-G4-ZE/E2

G4 module IP65
4 inputs (PNP) and 3 electronic outputs

VBA-4E4A-G4-ZE/E2

G4 module IP65
4 inputs (PNP) and 4 electronic outputs

VBA-2A-G4-U

G4 module IP65
2 analog outputs (voltage)

VBA-2A-G4-I

G4 module IP65
2 analog outputs (current)

VBA-2E-G4-U

G4 module IP65
2 analog inputs (voltage)

VBA-2E-G4-I

G4 module IP65
2 analog inputs (current)

VAA-2EA-G1-ZE/E2-LG

Logic module
2 inputs/2 outputs

VAA-4A-G4-E0

G4 module IP67
4 electronic outputs (NPN)

VAA-4A-G4-E2

G4 module IP67
4 electronic outputs (PNP)

VAA-2EA-G4-ZE0/E0

G4 PG module IP67
2 inputs (NPN) and 2 electronic outputs

VAA-2EA-G4-ZE/E2

G4 module IP67
2 inputs (PNP) and 2 electronic outputs

VAA-4E4A-G4-ZE/E2

G4 module IP65
4 inputs (PNP) and 4 electronic outputs

VAA-4E4A-G4-ZE/E2-Y909711

G4 module IP65
4 inputs (PNP) and 4 electronic outputs

VAA-4E4A-G4-ZE/E2-IFM

G4 module IP65
4 inputs (PNP) and 4 electronic outputs

VAA-4EA-G4-ZE/E2

G4 module IP65
4 inputs (PNP) and 4 electronic outputs

VAA-4A-G1-E2

Standard module IP67
4 electronic outputs

VAA-2EA-G1-ZE/E2

Standard module IP67
2 inputs (PNP) and 2 electronic outputs

VAN-G4-PE

AS-Interface power extender

VAN-G4-PE-4A

Matching system components

AS-Interface power extender

VAA-4E2A-G1-ZE/PEXT-S

Pneumatic module

4 inputs/2 pneumatic outputs

VBA-4E2A-G1-ZE/PEXT-S

Pneumatic module

4 inputs/2 pneumatic outputs

VAA-2E-G4-SE-V1-IFM

AS-Interface safety module

VAA-2E-G4-SE

G4 module IP67

safety module with 2 inputs