




Dimensions

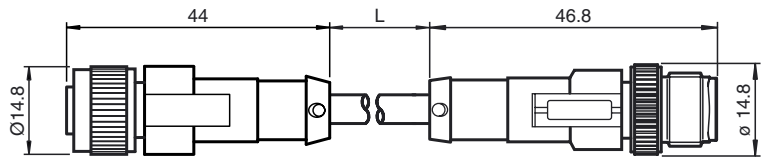

Model Number

V15-G-5M-PUR-CAN-V15-G

DeviceNet/CANOpen bus cable, M12 to M12, PUR cable 5-pin

Features

- Suitable for DeviceNet and CANopen
- Shield connected to pin 1
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Halogen-free

Technical data

General specifications

Number of pins	5
Connection 1	socket
Construction type 1	straight
Threading 1	M12
Connection 2	Male connector
Construction type 2	straight
Threading 2	M12

Electrical specifications

Operating voltage	U_B	max. 60 V DC
Operating current		max. 4 A
Volume resistance		< 5 m Ω


Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -20 ... 75 °C (-4 ... 167 °F)
Pollution Degree	3

Mechanical specifications

Contact elements	spring-loaded contact socket	
Pin diameter	1 mm	
Degree of protection	IP65/IP67	
Material		
Contacts	CuSn	
Contact surface	Ni/Au	
Body	TPU, black	
Cable	PUR	
Slotted nut	Zinc die-casting, nickel-plated	
Seal	NBR	
Core insulation	PE	
Cable	2 pairs, each with 2 leads, wrapped around a drain wire	
Sheath diameter	Ø 6.7 mm	
Bending radius	> 10 x cable diameter, moving	
Color	violet	
Cores	2 x 0.2 mm ² (signal wire) 2 x 0.32 mm ² (power supply) 1 x 0.32 mm ² (drain wire)	
Conductor construction	19 x 0.12 mm Ø (signal wire) 19 x 0.15 mm Ø (power supply)	
Shield	grid Tin-plated copper wires, 70 % coverage	
Length	L	5 m
Flammability		
Housing		94 HB

Electrical connection

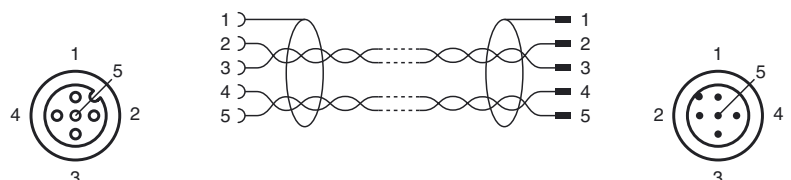

Release date: 2014-10-06 14:32 Date of issue: 2014-10-06 194115_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".