




**Dimensions**

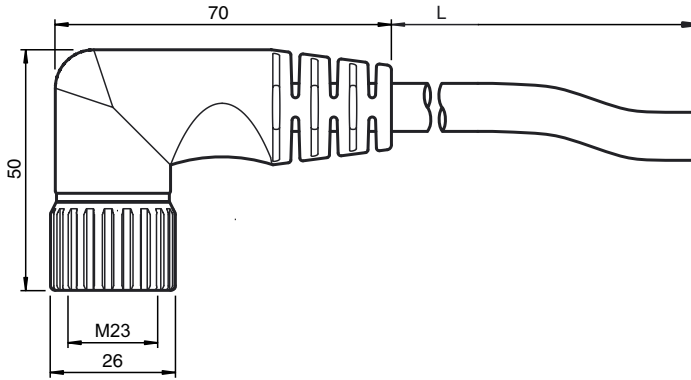

**Model Number**

**V23-19-W-3M-PUR**

Female cordset, M23, 19-pin, PUR cable

**Technical data**

**General specifications**

Number of pins	19
Connection 1	female connector
Construction type 1	right angle
Threading 1	M23
Connection 2	cable end

**Electrical specifications**

Operating voltage	U <sub>B</sub>	150 V AC
Operating current		12 A


**Ambient conditions**

Ambient temperature	-30 ... 70 °C (-22 ... 158 °F) (fixed cable)
Storage temperature	-5 ... 70 °C (23 ... 158 °F) (movable cable)
Pollution Degree	2

**Mechanical specifications**

<b>Material</b>	
Cable	PUR/PVC
<b>Cable</b>	
Sheath diameter	Ø 11.6 mm
Color	black
Cores	16 x 0.5 mm <sup>2</sup> and 3 x 1 mm <sup>2</sup>
Length	L 3 m

**Electrical connection**



1	VT	11	BK
2	RD	12	GN/YE
3	GY	13	YE/BN
4	RD/BU	14	BN/GN
5	GN	15	WH
6	BU	16	YE
7	GY/PK	17	PK
8	WH/GN	18	GY/BN
9	WH/YE	19	BN
10	WH/GY		

Release date: 2013-03-26 17:16 Date of issue: 2013-03-26 200675\_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411  
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs  
Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com