



**ECOLAB**

### Model number


#### VAZ-2T1-FK-G10-1M-PUR-V1-GV4A

Splitter box G10, AS-Interface and auxiliary voltage to 1 x M12 round connector


### Features

- One piece housing
- Coupling stainless steel nut
- Simple and fast mounting
- Gold-plated and machined contacts
- Oil and abrasion resistant PUR line appropriate for drag chains
- Immunity to vibration
- Degree of protection IP68 / IP69K
- Halogen-free

### Dimensions

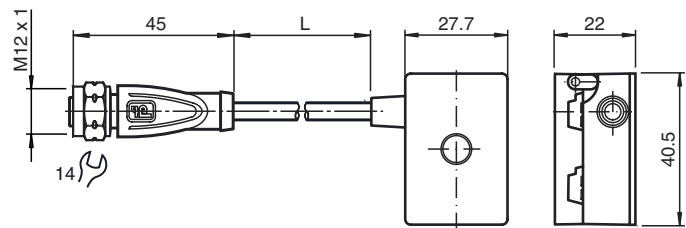

### Electrical connection

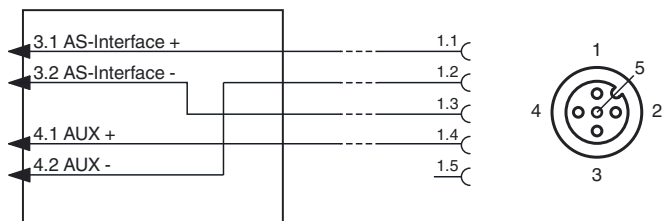

### Technical data

#### General specifications

Construction type	Socket, straight Flat cable terminals AS-Interface/ext. auxiliary voltage
-------------------	--

#### Electrical specifications

Rated operating voltage	$U_e \leq 32 \text{ V PELV}$ ( AS-Interface , ext. auxiliary voltage AUX )
Rated operating current	$I_e \leq 4 \text{ A AS-Interface, } \leq 4 \text{ A AUX}$
Protection class	III
Surge protection	overvoltage category III
Pulse withstand voltage	800 V

#### Ambient conditions

Ambient temperature	-25 ... 75 °C (-13 ... 167 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Pollution Degree	3

#### Mechanical specifications

Degree of protection	IP67 IP67 / IP68 / IP69K with flat cable VAZ-FK-S*
Connection	Flat cable AS-Interface: cable piercing method Flat cable ext. auxiliary voltage $U_{AUX}$ : Insulation penetration technology Plug connection: M12 x 1 socket (V1)
Material	
Contacts	CuSn / Au
Housing	PBT PC
Body	black PUR
Cable	PUR
Slotted nut	Stainless steel 1.4404 / AISI 316L
Mounting screw	Stainless steel 1.4305 / AISI 303
Cable	
Sheath diameter	Ø4.8 mm
Color	black
Cores	4 x 0.5 mm <sup>2</sup>
Length	L 1 m
Mass	75 g
Tightening torque, fastening screws	1.65 Nm

#### Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000

**Notes****Mounting instructions**

You may screw the device onto a level mounting surface using two M4 attachment screws. The attachment screws are not included.

