


Dimensions

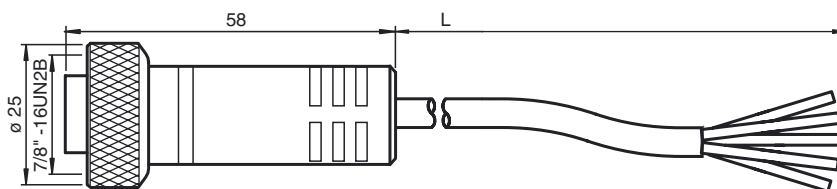

Model Number

V95-G-YE2M-PVC-22
 Female connector, 7/8" - 16 UNF, 5-pin, PVC cable

Features

- Thread 7/8"
- Immunity to vibration

Technical data

General specifications

Number of pins	5
Connection 1	female connector
Construction type 1	straight
Threading 1	7/8"
Connection 2	cable end
Threading 2	7/8"

Electrical specifications

Operating voltage	U _B	max. 300 V
Operating current		max. 4 A


Ambient conditions

Ambient temperature	-25 ... 105 °C (-13 ... 221 °F)
Pollution Degree	3

Mechanical specifications

Protection degree	IP68
Material	
Contacts	gold plated copper alloy
Body	PVC
Cable	PVC
Slotted nut	anodized aluminium
Cable	fine-strand, flexible
Sheath diameter	Ø 5.7 mm
Color	yellow
Cores	5 x 0.34 mm ²
Length	L 2 m

Electrical connection

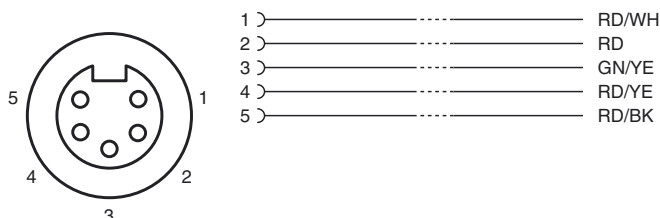

Release date: 2011-02-07 19:24 Date of issue: 2011-02-07 910360_ENG.xml

Subject to modifications without notice

Pepperl+Fuchs Group
 www.pepperl-fuchs.com

USA: +1 330 486 0001
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411
 fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs
 Singapore: +65 6779 9091
 fa-info@sg.pepperl-fuchs.com