



**Model Number**


**V94-W-YE4M-STOOW**

Female cordset, 7/8", 4-pin, STOOW cable

**Features**

- Thread 7/8"

**Dimensions**

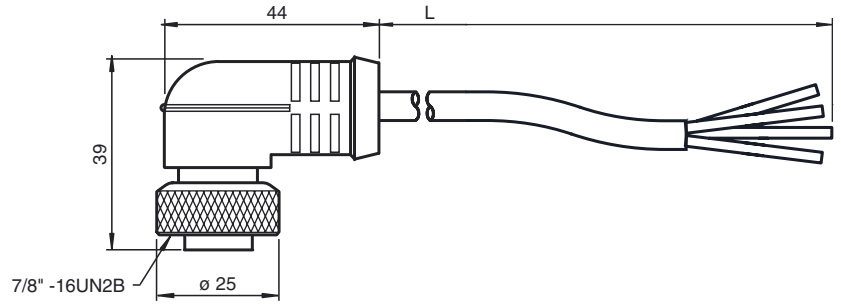

**Technical data**

**General specifications**

Number of pins	4
Connection 1	socket
Construction type 1	right angle
Threading 1	7/8"
Connection 2	cable end

**Electrical specifications**

Operating voltage	U <sub>B</sub>	max. 600 V
Test voltage		1500 V
Operating current		10 A
Volume resistance		< 5 mΩ

**Ambient conditions**

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------


**Mechanical specifications**

Protection degree	IP67
Material	
Contacts	Cu alloy gold plated
Body	PVC, yellow
Cable	PVC
Slotted nut	clear anodized aluminum
Core insulation	PVC
Cable	fine-strand, flexible
Sheath diameter	Ø 10.7 mm
Bending radius	10 x cable diameter
Color	yellow
Cores	4 x 1.5 mm <sup>2</sup> (16 AWG)
Length	L 4 m
Note	STOOW UL Standard

**Approvals and certificates**

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

**Electrical connection**

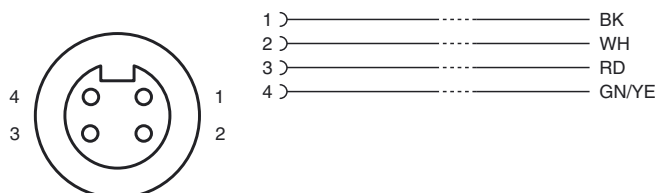

Release date: 2013-12-10 17:12 Date of issue: 2013-12-10 912590\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".