

SKS36-HFA0-K02







# Motor feedback systems rotary HIPERFACE® SKS/SKM36

Model Name > SKS36-HFA0-K02

Part No. > 1034095





Illustration may differ

# At a glance

- Motor feedback systems for the standard performance range
- 128 sine/cosine periods per revolution
- Absolute position with a resolution of 4,096 increments per revolution and 4,096 revolutions with the multiturn system
- Programming of the position value and electronic type label
- HIPERFACE® interface
- · Integrated version and stand-alone design
- Certified according to SIL2/PL d (only valid for SKS36S/SKM36S-H...)
- · Conforms to RoHs

#### Your benefits

- The small dimension allows manufacturers of low-power and minimal-power motors to considerably reduce the size of their motors
- The stand-alone version is ideally suited as a master and path encoders
- The SKS/SKM36 motor feedback systems have strongly penetrated the drive technology market
- The consistent mechanical components in SEK/SEL37 allow for a high degree of flexibility with various encoder systems



# **Performance**

Number of sine/cosine periods per revolution: 128

Number of the absolute ascertainable revolutions: 1 (Singleturn)
Total number of steps: 4,096

Measuring step: 2.5 angular seconds at interpolation of the sine/cosine signals with e.g. 12

Bit

Error limits for the digital absolute value: ± 320 angular seconds (via RS485)

Differential non-linearity: ± 40 angular seconds (Non-linearity within a sine/cosine period)

Operating speed: 12,000 /min, up to which the absolute position can be reliably produced

Available memory area: 1,792 Byte, 1,792 Byte (E2PROM 2048)

Integral non-linearity typ.: ± 80 angular seconds (Error limits for evaluating sine/cosine period)

## Mechanical data

Flange type/stator coupling: Spring mounting plate
Dimensions: See dimensional drawing

Mass:0.07 kgMoment of inertia of the rotor:4.5 gcm²Maximum angular acceleration:500,000 rad/s²

Operating torque: 0.2 Ncm Start up torque: 0.3 Ncm Permissible shaft movement, radial, static: ± 0.1 mm Permissible shaft movement, radial, dynamic: ± 0.05 mm Permissible shaft movement, axial, static: ± 0.2 mm Permissible shaft movement, axial, dynamic: ± 0.1 mm

3.6 x 10<sup>9</sup> revolutions Life of ball bearings: Connection type: Connector, 8-pin, radial

Shaft version: Tapered shaft

#### **Electrical data**

Electrical interface: **HIPERFACE** Operating voltage range/supply Voltage: 7 V DC ... 12 V DC

Recommended supply voltage: 8 V DC

0 kHz ... 65 kHz 60 mA <sup>1)</sup> Output frequency for sine/cosine signals:

Operating power consumption (no load):

1) Without load

# Interfaces

Type of code for the absolute value: Binary

Code sequence: Increasing, for clockwise shaft rotation, looking in direction "A" (see

dimensional drawing)

Parameter channel RS 485: digital, Process data channel SIN, REFSIN, Interface signals:

COS, REFCOS: analog, differential

#### **Ambient data**

-20 °C ... +110 °C Working temperature range:

Storage temperature range: -40 °C ... +125 °C, without package Relative humidity/Condensation: 90 %, Condensation not permitted

Resistance to shocks: 100 g/6 ms/according to EN 60068-2-27


50 g/10 Hz/2,000 Hz/according to EN 60068-2-6 Resistance to vibration: (according to EN 61000-6-2 and EN 61000-6-3) EMC:

Enclosure rating: IP 50 (according to IEC 60529), with mating connector inserted and


closed cover

<sup>1)</sup> The EMC according to the standards quoted is achieved when the motor feedback system is mounted in an electrically conductive housing, which is connected to the central earthing point of the motor controller via a cable screen. This is also where the GND (0 V) connection of the power supply voltage is linked to earth. Users must perform their own tests when other screen designs are used.

# **Dimensional drawing**

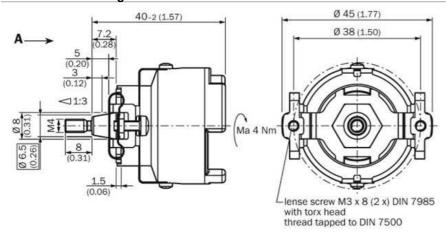

# **Proposed fitting**

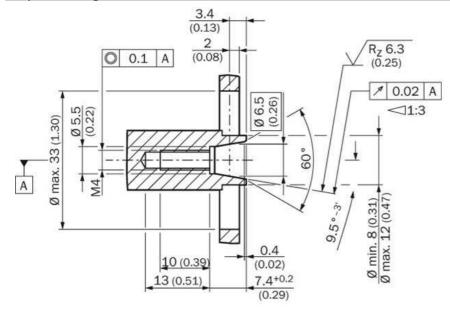

All dimensions in mm (inch)

Australia

Phone +61 3 9457 0600 1800 33 48 02 - tollfree

E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66 E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900

E-Mail marketing@sick.com.br

Phone +1 905 771 14 44 E-Mail information@sick.com

Česká republika

Phone +420 2 57 91 18 50

E-Mail sick@sick.cz

China

Phone +86 4000 121 000 E-Mail info.china@sick.net.cn Phone +852-2153 6300 E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00 E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301

E-Mail info@sick.de

Phone +34 93 480 31 00

E-Mail info@sick.es

France

Phone +33 1 64 62 35 00

E-Mail info@sick.fr

**Great Britain** 

Phone +44 (0)1727 831121

E-Mail info@sick.co.uk

Phone +91-22-4033 8333

E-Mail info@sick-india.com

Israel

Phone +972-4-6881000

E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41

E-Mail info@sick.it

Phone +81 (0)3 5309 2112

E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680

E-Mail office@sick.hu

Nederland

Phone +31 (0)30 229 25 44

E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00

E-Mail sick@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0

E-Mail office@sick.at

Phone +48 22 837 40 50

E-Mail info@sick.pl

România

Phone +40 356 171 120

E-Mail office@sick.ro

Phone +7-495-775-05-30

E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39

E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732

E-Mail sales.gsg@sick.com

Slovenija

Phone +386 (0)1-47 69 990

E-Mail office@sick.si

South Africa

Phone +27 11 472 3733

E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4

E-Mail info@sickkorea.net

Phone +358-9-25 15 800

E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00

E-Mail info@sick.se

Phone +886 2 2375-6288

E-Mail sales@sick.com.tw

Phone +90 (216) 528 50 00

E-Mail info@sick.com.tr

**United Arab Emirates** 

Phone +971 (0) 4 88 65 878

E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780

1 (800) 325-7425 - tollfree

E-Mail info@sickusa.com

More representatives and agencies

at www.sick.com

